




# Raising Woodside

In November and December, the County will finish construction on Woodside Avenue. Crews recently installed the box culvert tunnel under the eastbound lanes of Woodside Avenue, and repaired and shifted traffic onto the freshly paved eastbound lanes. Crews are now working on the westbound lanes to coordinate utility connections and raise the level of the roadway to the new height of the eastbound lanes.

Crews will raise the westbound lanes on Woodside Avenue by:

- › **Connecting Utilities:** Crews are coordinating with utility agencies to finish connecting gas, electric and communication lines. When these connections are complete, crews will cover the open trenches and prepare to pave the roadway.
- › **Filling and Leveling Westbound Lanes:** Crews will dig-up and grind the top few inches of asphalt on the existing roadway to roughen the foundation. Then, they will fill the westbound lanes with nearly one foot of aggregate material to match the raised level of the eastbound lanes. Crews will use large rollers to compact the aggregate base.
- › **Grading and Paving Westbound Lanes:** Once the four lanes are level across Woodside Avenue, crews will base-grade and base-pave the westbound lanes. After this base grade, they will apply a final four-lane pave across all four lanes of Woodside Avenue, known as a cap. This process involves layers of asphalt material being rolled and compacted on top of each other.

Crews will also modify curbs, gutters and sidewalks along the westbound lanes of Woodside Avenue to match the adjusted roadway height and direct drainage around properties. When this work is complete, a final traffic shift will occur to open the two eastbound and one westbound lanes of Woodside Avenue to traffic. Look for the completion of this project in the coming months, in time for seasonal winter storm water to be channeled into the new box culverts under Woodside and out past SR 67.

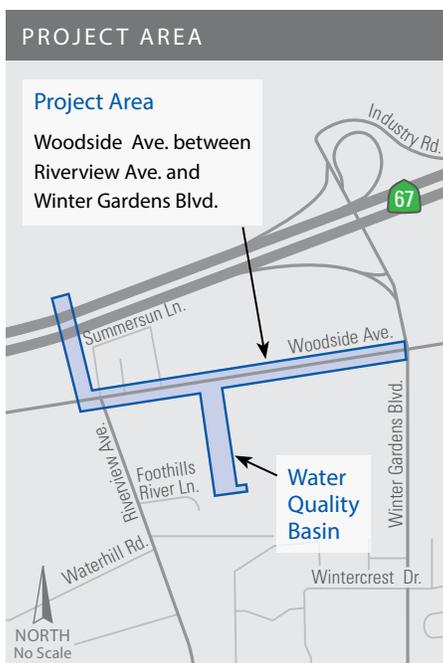

## Construction Update: Current Construction Activities

In November and December, the County is working on the following:

### Completing Water Quality Basin:

Crews installed a chain-link fence and access gate around the perimeter, as well as planted landscaping. The County will monitor and water landscaping during the 90-day plant establishment period to ensure successful growth.

### Installing Traffic Signal:


Crews will install a new traffic signal at the intersection of Riverview Avenue and Woodside Avenue, and will activate the traffic light at the end of the project.

### Leveling and Paving Roadway:

Crews will use nearly one foot of aggregate material to fill the westbound lanes of Woodside Avenue up to the level as the eastbound side, and match the curbs and sidewalks being paved on the westbound lanes.

### Opening All Lanes to Traffic:

Crews anticipate staging a final traffic shift to open all newly-paved lanes of Woodside Avenue to traffic at the end of November.

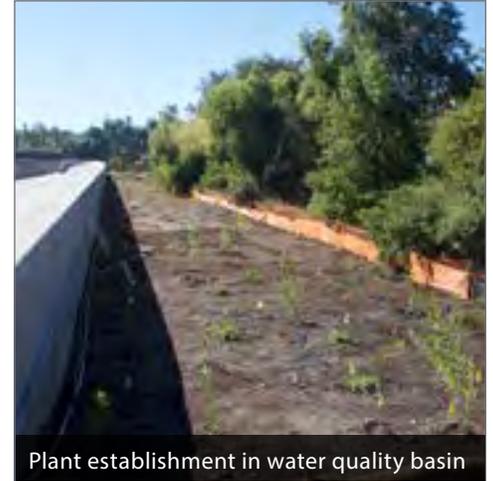

Plant establishment in water quality basin

## Working with the Community

The County is working with the local Lakeside community to enhance the neighborhood adjacent to Woodside Avenue while improving the roadway and stormwater conveyance system. Some improvements the County has made in the neighborhood include:

### 1 > Woodlake Housing Parking Lot:

Crews have re-paved and poured curbs to form the parking lot that construction crews had excavated at the beginning of the project to install the reinforced box culvert and the relocation of four waterlines. The freshly-paved parking lot will accommodate residents of the Woodlake military housing property complex, next to the project office.

### 2 > Pedestrian Safety Features:

Crews will stripe new pedestrian crosswalks at the intersection of Woodside Avenue and Riverford Road to accompany the traffic signal being installed. These safety features will assist students crossing to and from Lakeside Middle School, as well as residents from nearby homes and apartments.

### 3 > Relocating Business Features:


Crews have worked with businesses on Woodside Avenue during construction by adjusting schedules and relocating signs into safe areas while work progresses. Crews have also maintained driveway entrances on Woodside Avenue and posted 'Business Open' signs to promote businesses during construction.



1 > Paving the military housing parking lot



2 > Planning pedestrian safety features

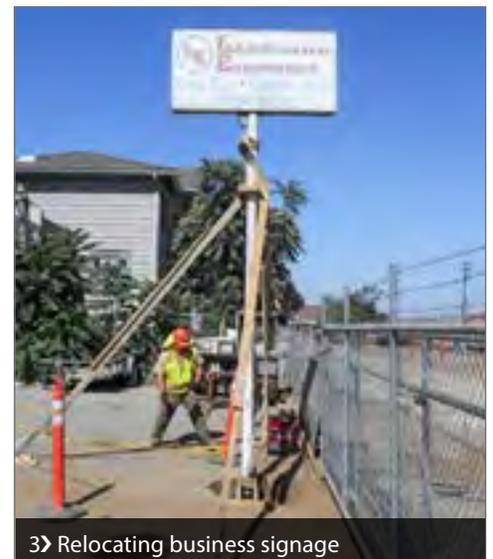

3 > Relocating business signage