

**UPDATED PRELIMINARY GEOTECHNICAL EVALUATION
PROPOSED 9TH STREET MAJOR SUBDIVISION
APN(s) 284-202-21, 284-203-08, 284-205-01, 284-244-01
RAMONA AREA OF SAN DIEGO COUNTY, CALIFORNIA**

WARMINGTON RESIDENTIAL

**November 26, 2025
J.N. 24-321**

ENGINEERS + GEOLOGISTS + ENVIRONMENTAL SCIENTISTS

November 26, 2025
J.N. 24-321

WARMINGTON RESIDENTIAL

3090 Pullman Street
Costa Mesa, California 92626

Attention: Mr. Matt Esquivel

Subject: Updated Preliminary Geotechnical Evaluation, Proposed 9th Street Major Subdivision, APN(s) 284-202-21, 284-203-08, 284-205-01, 284-244-01, Ramona Area of San Diego County, California

Dear Mr. Esquivel:

Petra Geosciences, Inc. (Petra) is submitting herewith our updated design-level geotechnical evaluation report for the approximately 16.6-acre site with the proposed 85 two-story condominium project in the Ramona area of San Diego County, California. This work was performed in general accordance with the scope of work outlined in our Proposal No. 24-321P dated September 4, 2024. This report presents the results of our current field explorations, the requirements of the 2022 California Building Code (CBC) and our engineering judgment, opinions, conclusions, and recommendations pertaining to geotechnical design aspects for the proposed multi-family residential development.

It has been a pleasure to be of service to you on this project. Should you have questions regarding the contents of this report or should you require additional information, please contact this office.

Respectfully submitted,

PETRA GEOSCIENCES, INC.



Jim Larwood, CEG
Principal Geologist



Siamak Jafroudi, Ph.D., GE
Senior Principal Engineer

TABLE OF CONTENTS

	<u>Page</u>
INTRODUCTION	1
PURPOSE AND SCOPE OF SERVICES	1
SITE LOCATION	2
SITE DESCRIPTION	2
PROPOSED DEVELOPMENT	3
Literature Review	3
Subsurface Exploration	3
Laboratory Testing	4
FINDINGS	4
Regional Geologic Setting	4
Local Geology and Subsurface Soil Conditions	6
Groundwater	7
Surface Water	7
Faulting	8
Seismic Design Parameters	9
CONCLUSIONS	11
Site Suitability	11
Primary Geologic/Geotechnical Considerations	11
Groundwater	11
Fault Rupture	11
Strong Ground Motions	12
Liquefaction, Landslides and Secondary Seismic Effects	12
Compressible Soils	12
Flooding	13
Stability of Temporary Excavations and Backcuts	13
EARTHWORK RECOMMENDATIONS	13
Earthwork Criteria	13
Geotechnical Observations and Testing	13
Clearing and Grubbing	14
Existing Septic Systems	14
Excavation Characteristics	14
Remedial Grading - General	15
Ground Preparation – Building Pads	15
Ground Preparation – Drive Isles and Parking Areas	16
Suitability of Site Soils as Fill	16
Fill Placement	17
Import Soils for Grading	17
Shrinkage and Subsidence	17
Temporary Excavations	17
Cut Slope Construction and Protection	18
Monitoring of Adjacent Properties	18
FOUNDATION DESIGN RECOMMENDATIONS	19
Allowable Soil Bearing Capacities	19
Estimated Footing Settlement	19
Lateral Resistance	19
Guidelines for Footings and Slab-on-Ground Design and Construction	20
Conventional Slabs on-Grade System	21
Post-Tensioned Slabs on-Grade System	23

TABLE OF CONTENTS

	<u>Page</u>
Footing Observations	26
Preliminary Infiltration Rate	26
Preliminary Pavement Design Recommendations	26
General Corrosivity Screening.....	27
POST-GRADING RECOMMENDATIONS	29
Site Drainage.....	29
Slope Landscaping and Maintenance.....	29
Utility Trenches.....	30
EXTERIOR CONCRETE FLATWORK	31
General	31
Subgrade Preparation	32
Thickness and Joint Spacing	32
Reinforcement.....	33
Edge Beams (Optional).....	33
Drainage.....	33
Tree Wells	34
Retaining Walls.....	34
Footing/Wall Base Embedment	34
Allowable Bearing Values and Lateral Resistance	34
Active Earth Pressures	35
Earthquake Loads on Retaining Walls	35
Geotechnical Observation and Testing.....	37
Backdrains.....	38
Waterproofing	38
Temporary Excavations.....	38
Wall Backfill	38
Masonry Block Screen Walls.....	39
Construction On or Near the Tops of Descending Slopes.....	39
Construction on Level Ground.....	39
Construction Joints.....	39
CONSTRUCTION SERVICES.....	39
LIMITATIONS	40
REFERENCES	41

ATTACHMENTS

FIGURES RW-1 – RW-3 – RETAINING WALL DETAILS

FIGURE 1 – SITE LOCATION MAP

FIGURE 2 – BORING LOCATION MAP

APPENDICES

APPENDIX A – FIELD EXPLORATION LOGS (BORINGS)

APPENDIX B – LABORATORY TEST PROCEDURES / LABORATORY DATA SUMMARY

APPENDIX C – SEISMIC DESIGN PARAMETERS

APPENDIX D – PERCOLATION TEST DATA

APPENDIX E – STANDARD GRADING SPECIFICATIONS

**UPDATED PRELIMINARY GEOTECHNICAL EVALUATION
PROPOSED 9TH STREET MAJOR SUBDIVISION
APN(s) 284-202-21, 284-203-08, 284-205-01, 284-244-01
RAMONA AREA OF SAN DIEGO COUNTY, CALIFORNIA**

INTRODUCTION

Petra Geosciences, Inc. (Petra) is presenting herein the results of our updated preliminary geotechnical evaluation of the subject the 16.6±-acre property. Our evaluation included a review of regional geological maps published by the California Geological Survey (CGS) and other sources that encompass the site, including review of limited online imagery (Google Earth Imagery, 1994-2024) of the project site. This report presents a summary of recent work which included the drilling of seven exploratory borings and conducting one percolation test within the proposed residential development.

PURPOSE AND SCOPE OF SERVICES

The purposes of this updated preliminary geotechnical evaluation were to present information on the subsurface geologic and soil conditions within the project area, evaluate the field and laboratory data, and provide conclusions and recommendations for design and construction of the proposed buildings and other site improvements as influenced by the subsurface conditions.

The scope of our recent evaluation consisted of the following:

- Reconnaissance of the site to evaluate existing conditions, mark-out borings for DigAlert notification, and contact DigAlert.
- Review of available published and unpublished data and maps concerning geologic and soil conditions within and adjacent to the site, which could have an impact on the proposed improvements.
- Drilling of a total of seven exploratory borings up to 19 feet below ground surface (bgs), utilizing a truck-mounted hollow-stem auger drill rig to evaluate the stratigraphy of the subsurface soils and collect representative undisturbed and bulk samples for laboratory testing.
- One of the borings was drilled near the lower elevations of the site in the western area. The boring was used to conduct a preliminary percolation test. Note that no grading plans or preliminary water quality basin locations were made available to Petra at the time of drilling and testing.
- Log and visually classify soil materials encountered in the borings in accordance with the Unified Soil Classification System.
- Conduct laboratory testing of representative samples (bulk and undisturbed) obtained from the exploratory borings to determine their engineering properties.
- Perform engineering and geologic analysis of the data with respect to the proposed improvements.

- Preparation of this report, including pertinent figures and appendices, presenting the results of our evaluation and recommendations for the proposed improvements in general conformance with the requirements of the 2022 California Building Code (2022 CBC), as well as in accordance with applicable local jurisdictional requirements.

SITE LOCATION

The roughly rectangular-shaped subject site consists of 16.6± acres of land bounded on the east by 9th Street, on the west by San Vicente Road, 10th Street, and 11th Street, on the north and south by existing homes in the Ramona area of San Diego County. A site location map is included as Figure 1.

SITE DESCRIPTION

The subject irregular-shaped property is comprised of land sloping gently to the west and north. Existing elevations on the order of approximately 1,432± feet above mean sea level (msl) along the northwest portion of the site, to 1,506± feet above msl along the southeast portion of the site. The site is covered with tall grasses and weeds. Vehicular access to the subject property is via dirt and partially paved roads from 10th Street. The subject site is partially secured by short fencing along the perimeter. Existing rural type detached homes are present to the south and north. Overhead communication and electrical lines are located along 9th Street, 10th Street, and 11th Street.

Based on aerial photographic information obtained on Google Earth (1994 - 2024), the subject site appears mostly unchanged from current conditions, except variations in seasonal vegetation and vegetation clearing and dirt roads. An aerial photograph of the subject property from June 2023 is provided below in Figure A.



Figure A – Aerial photograph of the subject property (Google Earth, June 2023)

PROPOSED DEVELOPMENT

Based on a review of the conceptual plan prepared by KGTY (KGTY, 2024), 17 detached lots in “Neighborhood A” and 68 detached lots in “Neighborhood B” are planned. We assume that these 85 lots will be of two-story wood frame construction with associated driveways, interior streets and drives, and stormwater basin. The tract will be accessed by proposed site entries off 9th Street and 10th Street.

It is expected that the buildings will be of typical wood-frame construction supported on conventional slab-on-ground foundations. Appurtenant structures will likely include paved drive isles and parking stalls, trash enclosures, masonry block screen walls, retaining walls, a tot lot, landscaped areas, and above- and below-ground utilities. Anticipated perimeter cut slopes up to 15± feet in height at 2:1 h:v are anticipated along the eastern and southern boundaries. Fill slopes less than approximately 5 feet in height at 2:1 h:v are anticipated along the northern, western boundaries. Based on the preliminary grading plan by C&V 2025, retaining walls are up to 20 feet in height. It should be noted, however, that final grading plans were not available at the time of the study and the ultimate design and amount of cut and fill required throughout the project is not available.

Literature Review

Petra was not provided geotechnical reports for review pertaining to the subject property by the client. Petra researched and reviewed available published and unpublished geologic data pertaining to regional geology, groundwater, faulting, and geologic hazards that may affect the site. The results of this review are discussed under the Findings and Conclusions sections presented in this report.

Subsurface Exploration

A subsurface exploration program was performed by a geologist from Petra on September 19 and 20, 2024. The exploration involved the drilling of seven exploratory borings (B-1 through B-6 and P-1) to a maximum depth of approximately 19 feet bgs. Earth materials encountered within the seven exploratory borings were classified and logged by a geologist, under the supervision of a professional geologist, in accordance with the visual-manual procedures of the Unified Soil Classification System. The approximate locations of the exploratory borings are shown on the Boring Location Map, Figure 2. The boring logs are presented in Appendix A.

Disturbed bulk samples and relatively undisturbed ring samples of soil materials were collected for classification, laboratory testing and engineering analyses. Undisturbed samples were obtained using a 3-inch outside diameter modified California split-spoon soil sampler lined with brass rings. The soil sampler was driven with successive 30-inch drops of a free-fall, 140-pound automatic trip hammer. The central

portions of the driven-core samples were placed in sealed containers and transported to our laboratory for testing. The number of blows required to drive the split-spoon sampler 18 inches into the soil were recorded for each 6-inch driving increment; however, the number of blows required to drive the sampler for the final 12 inches was noted in the boring logs as *Blows per Foot*.

Standard Penetration Tests (SPT) were also performed at selected depth intervals in accordance with ASTM D 1586. This method consists of mechanically driving an unlined, 2.0-inch outside diameter (OD) standard penetrometer sampler 18 inches into the soil with successive 30-inch drops of the 140-pound automatic trip hammer. Blow counts for each 6-inch driving increment were recorded on the exploration logs. The number of blows required to drive the sampler for the last 12 of the 18 inches was identified as the uncorrected standard penetration resistance (N). Disturbed soil samples from the unlined sampler were placed in sealed plastic bags and transported to our laboratory for testing.

One boring (P-1) was drilled near the lower elevation of the site in the western area. The boring was used to conduct a percolation test. Perforated pipe and gravel were placed in the boring, followed by pre-soaking the borings with water. Following presoak, a falling-head percolation test was conducted. Upon completion of logging and/or testing, all boreholes were subsequently backfilled with borehole cuttings.

Laboratory Testing

In-situ dry density and moisture content, maximum dry density and optimum moisture content, expansion index, direct shear, and corrosivity (sulfate and chloride content, pH, and resistivity), for selected samples of onsite soils materials was conducted. A description of laboratory test methods and summaries of the laboratory test data are presented in Appendix B. The in-site dry density and moisture content results are presented on the boring logs (Appendix A).

FINDINGS

Regional Geologic Setting

Geologically, the site lies within the northern portion of the Peninsular Ranges Geomorphic Province. The Peninsular Range region extends from the tip of Baja California to the Transverse Ranges and the Los Angeles Basin and is characterized by northwest trending mountain ranges separated by subparallel fault zones. In general, the province is underlain primarily of plutonic rock of the Southern California Batholith. The Peninsular Range Geomorphic Province is generally characterized by alluviated basins and elevated erosion surfaces.

More specifically, the subject site lies within the Santa Maria Valley area. According to the 7.5 Minute Geologic Map of the San Pasqual Quadrangle (Hernandez, 2007), the northern portion of the site is underlain by Holocene and late Pleistocene young axial channel deposits which were observed to be slightly to moderately well consolidated, poorly sorted, and well sorted, fluvial deposits. These are underlain by Cretaceous-age Granitic rocks (Tonalite) of the Southern California Batholith. A portion of the geologic map with legend is provided below in Figure B.

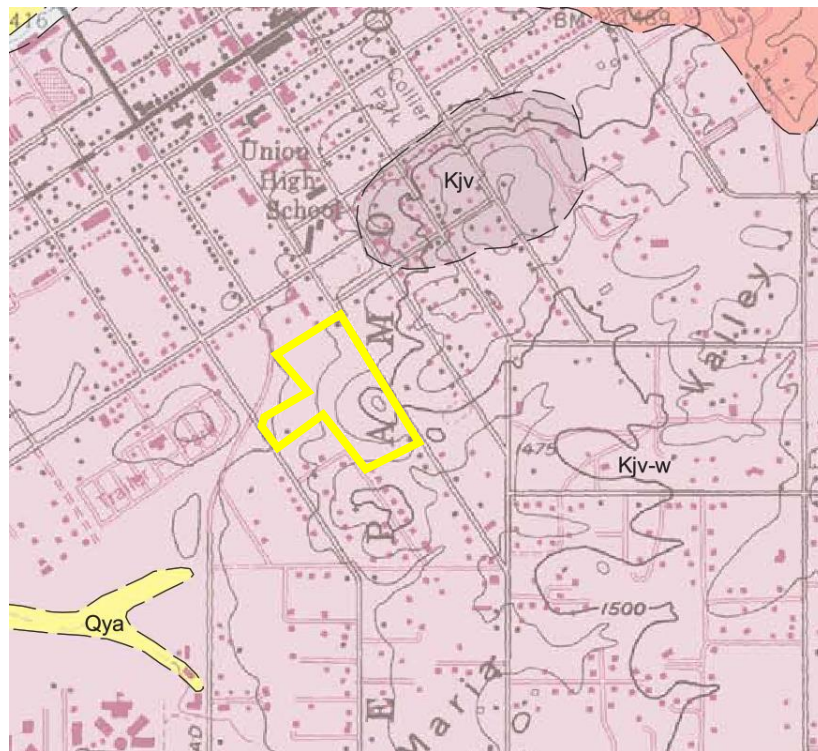


Figure B – Geologic Map (Hernandez, 2007)

	Young axial channel deposits (Holocene to late Pleistocene) - Unconsolidated to slightly consolidated sand and gravel deposited in marginal parts of active washes. Consists of light olive-brown (2.5Y 5/3) to grayish-brown (2.5Y 5/2), fluvial deposits of fine- to coarse-grained sand with minor silt, and minor fine to coarse gravel and cobbles. Gravel and cobbles are sub-rounded to rounded. In most areas, unit is slightly elevated above the active younger wash deposits.
	Japatul Valley Tonalite (Cretaceous) - Consists of biotite-hornblende tonalite, hornblende-biotite tonalite, and borderline tonalite/granodiorite that grades to granodiorite. Japatul Valley rocks are medium- to coarse-grained, equigranular, and moderately to strongly foliated. Weathered color ranges from light-gray to grayish-white, and the abundant mafic inclusions commonly weather out in relief. The Japatul Valley unit is composed of plagioclase, quartz, biotite, hornblende, and K-feldspar. Plagioclase in tonalite samples is zoned from labradorite cores to sodic oligoclase rims, and in granodiorite, from sodic andesine to sodic oligoclase. Plagioclase has undergone variable degrees of subsolidus strain and recrystallization. Roughly one-half of Japatul Valley samples are strongly foliated, and in these rocks, plagioclase igneous shapes and zoning are almost obliterated. In mylonitic gneiss, plagioclase occurs as porphyroclasts containing solid-state inclusions of hornblende, biotite, epidote, and quartz, and in recrystallized folia. The Japatul Valley tonalite underlies a large portion of the San Pasqual quadrangle, and is one of the Ramona ring-dike units to the east. Japatul Valley tonalite underlies most of the Santa Maria Valley and is extensively exposed in the northwest map area. In the southeastern map area, the tonalite contains Kmv inclusions, and is cut by numerous dikes of the Corte Madera monzogranite (Kcm), many of which are too small to show at map scale. In the west and northern Santa Maria Valley, Japatul Valley rocks are also cut by Woodson Mountain Granodiorite dikes. This area is part of the northern outermost zone of the El Cajon Mountain plutonic complex to the south, in which Kcm dikes that fringe a central Corte Madera pluton intrude Kmv screens and Kjv tonalite (Todd, 2004). The Kjv unit has not been dated by U-Pb method. South of the San Pasqual quadrangle, conventional K-Ar hornblende ages of six samples range from 109 to 94 Ma (Hoggatt and Todd, unpublished data), and ⁴⁰ Ar/ ³⁹ Ar minimum emplacement ages of 112 and 104 Ma were also determined (Todd and others, 2003). Deeply weathered Kjv unit is shown on the map as Kjv-w .

The site does not lie within an Alquist-Priolo Earthquake Fault Zone, liquefaction hazard zone, nor a landslide hazard zone (Bryant and Hart, 2007; CGS, 2024).

Local Geology and Subsurface Soil Conditions

Several geologic units were encountered during our due diligence assessment of the site. The earth materials encountered within our exploratory borings consist of topsoil, young axial channel deposits, residual soil, and Cretaceous age bedrock of the Southern California Batholith. These units, from younger to older, are described below.

Topsoil: Topsoil was encountered at the surface across the majority northern portion of the site. These soils were comprised of silty fine to coarse grained sands that were various hues of brown, dry to moist, loose, and porous.

Alluvium (Qal): Alluvium was encountered beneath the topsoils and above the granitic bedrock. These soil deposits were fine- to coarse-grained silty sands, clayey sands, sandy silt and sandy clay which were observed to be brown, pale yellow, olive, and reddish-brown, damp to moist, and soft to stiff/loose to medium dense.

Granitic Bedrock: Cretaceous-age granitic bedrock was observed within the bottom of the exploratory borings (B-1 through B-6 and P-1). The granitic rock was pale yellow, reddish brown, gray-brown, pale olive, and olive brown, damp to moist, moderately weathered, and soft to moderately hard. Depths to bedrock range from 2.5 to 5 feet bgs.

Boring logs are presented in Appendix A. Boring locations are on the Boring Location Map (Figure 2).

Groundwater

The site is located within the San Diego River Valley Groundwater Sub-Basin (9-015) (California Department of Water Resources, 2024a). Based California Department of Water Resources (DWR) Water Data Library Interactive Station Map, no municipal wells are mapped on or in proximity to the subject property (California Department of Water Resources, 2024b). Two borings encountered groundwater in the northern area of the site. Boring B-1 and B-3 encountered groundwater in the granitic bedrock and is discussed further below. Other borings at the site did not encountered to an explored depth of 19 feet bgs. Regional groundwater is not anticipated to affect the proposed development.

Based on the results of our drilling program, an area of the site was observed to have localized perched groundwater in tonalite bedrock which was found in borings B-1 at 9.5 feet bgs at approximate elevation of 1,432.5 feet above mean sea level (amsl) and B-3 at 10.5 feet bgs at approximate elevation of 1,441.5 feet amsl. Based on review of available aerial photographs and online imagery, it appears the groundwater emanates from offsite sources along 9th Street.

Surface Water

No surface water was observed onsite during our recent field exploration. Based on Flood Insurance Map (FIRM), the site is located within an area of minimal flood zone hazard (FEMA, 2024). A portion of the Flood Insurance Rate Map (FIRM) for the subject property and vicinity is provided below in Figure C.

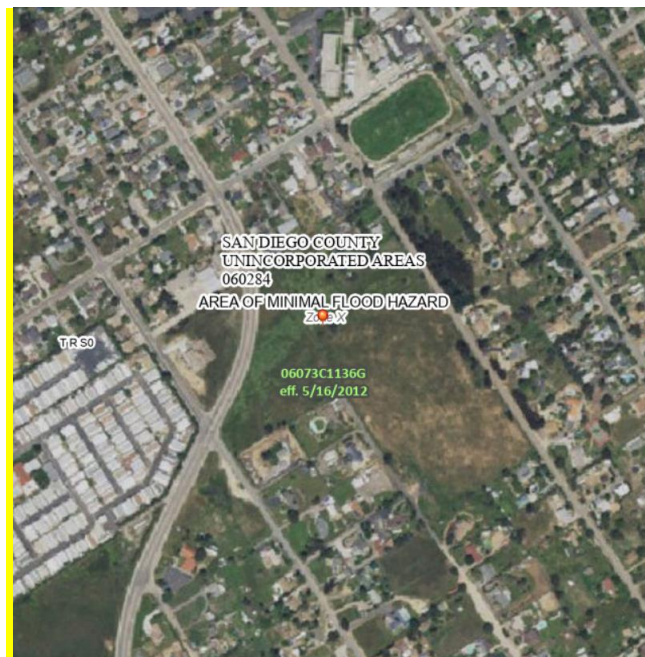


Figure C – FIRM Map, Map Number 06073C1136G (May 16, 2012)

Petra reviewed the California Division of Dam Safety (CDODS) Dam Breach Inundation Map Web Publisher (CDODS, 2024). There is one dam, Lake Sutherland Dam, identified by CDODS northeast of the site. However, the Lake Sutherland Dam is not up gradient from the subject property. The site is not in a downstream breach hazard.

Faulting

Based on our review of the referenced geologic maps and literature, no active faults are known to project through the property. Furthermore, the site does not lie within the boundaries of an “Earthquake Fault Zone” as defined by the State of California in the Alquist-Priolo Earthquake Fault Zoning Act.

The California Geological Survey’s (CGS) Special Publication 42 (revised 2018) defines a Holocene-active fault that has had displacement within the Holocene epoch or last 11,700 years. A pre-Holocene fault is defined as a fault that does not display evidence of movement within the last 11,700 years, but has moved within the Quaternary period, the last 2.6 million years. Pre-Holocene faults are not placed within Alquist-Priolo Earthquake Fault Zones, but are considered when placing such critical structures as dams and nuclear power plants, etc.

By definition, age-undetermined faults are “where the recency of fault movement has not been determined. Faults can be ‘age-undetermined’ if the fault in question has simply not been studied in order to determine its recency of movement. Faults can also be age-undetermined due to limitations in the ability to constrain the timing of the recency of faulting. Examples of such faults are instances where datable materials are not present in the geologic record, or where evidence of recency of movement does not exist due to stripping (either by natural or anthropogenic processes) of Holocene-age deposits. Within the framework of the A-P Act, age-undetermined faults within regulatory Earthquake Fault Zones are considered Holocene-active until proved otherwise (CGS, 2018). Age-undetermined faults are located in the western portion of the subject property, where surficial soils have been disturbed by previous agricultural activities. The main objective of the AP Act is to prevent the construction of dwellings on top of active faults that could displace the ground surface resulting in loss of life and property.

It should be noted that according to the USGS Unified Hazard Tool website and/or 2024 CGS California Earthquake Hazard Zone Application (EQZapp), the Elsinore Fault zone, located approximately 22.4 kilometers (13.9± miles) southwest of the site, would probably generate the most severe site ground motions and, therefore, is the majority contributor to the deterministic minimum component of the ground motion models. This fault is reported to be capable of generating a magnitude 7.71 event.

Seismic Design Parameters

Earthquake loads on earthen structures and buildings are a function of ground acceleration which may be determined from the site-specific ground motion analysis. Alternatively, a design response spectrum can be developed for certain sites based on the code guidelines. To provide the design team with the parameters necessary to construct the design acceleration response spectrum for this project, we used two computer applications. Specifically, the first computer application, which was jointly developed by the Structural Engineering Association of California (SEAOC) and California's Office of Statewide Health Planning and Development (OSHPD), the SEA/OSHPD Seismic Design Maps Tool website, <https://seismicmaps.org>, is used to calculate the ground motion parameters. The second computer application, the United States Geological Survey (USGS) Unified Hazard Tool website, <https://earthquake.usgs.gov/hazards/interactive/>, is used to estimate the earthquake magnitude and the distance to surface projection of the fault.

To run the above computer applications, site latitude and longitude, seismic risk category and knowledge of site class are required. The site class definition depends on the direct measurement and the ASCE 7-16 recommended procedure for calculating average small-strain shear wave velocity, V_{s30} , within the upper 30 meters (approximately 100 feet) of site soils.

A seismic risk category of II was assigned to the proposed building(s) in accordance with 2022 CBC, Table 1604.5. Based on our engineering geology judgement, the bedrock at the site appears to exhibit the characteristics of a Site Class B, i.e., competent rock with moderate fracturing and weathering; however, no direct, small-strain shear wave measurement of shear wave velocity was performed. Therefore, an average shear wave velocity in the range of 2,500 to 5,000 feet per second for the upper 100 feet was considered for the site based on engineering judgment and geophysical experience. As such, in accordance with ASCE 7-16, Table 20.3-1, Site Class B (B - Estimated as per SEA/OSHPD software) has been assigned to the subject site.

The following table, Table 1, provides parameters required to construct the design acceleration response spectrum based on the 2022 CBC guidelines. Please note that for Site Class B - Estimated, Site Coefficients, F_a , F_v , and F_{PGA} should be taken as unity (1.0), as reflected in Table 1. A printout of the computer output is attached in Appendix C.

TABLE 1
Seismic Design Parameters

Ground Motion Parameters	Specific Reference	Parameter Value	Unit
Site Latitude (North)	-	33.0354	°
Site Longitude (West)	-	-116.8627	°
Site Class Definition	Section 1613.2.2 ⁽¹⁾ , Chapter 20 ⁽²⁾	B-est ⁽⁴⁾	-
Assumed Seismic Risk Category	Table 1604.5 ⁽¹⁾	II	-
M _w - Earthquake Magnitude	USGS Unified Hazard Tool ⁽³⁾	7.71 ⁽³⁾	-
R - Distance to Surface Projection of Fault	USGS Unified Hazard Tool ⁽³⁾	22.4 ⁽³⁾	km
S _s - Mapped Spectral Response Acceleration Short Period (0.2 second)	Figure 1613.2.1(1) ⁽¹⁾	0.928 ⁽⁴⁾	g
S ₁ - Mapped Spectral Response Acceleration Long Period (1.0 second)	Figure 1613.2.1(3) ⁽¹⁾	0.331 ⁽⁴⁾	g
F _a - Short Period (0.2 second) Site Coefficient	Table 1613.2.3(1) ⁽¹⁾	1 ⁽⁴⁾	-
F _v - Long Period (1.0 second) Site Coefficient	Table 1613.2.3(2) ⁽¹⁾	1 ⁽⁴⁾	-
S _{MS} - MCE _R Spectral Response Acceleration Parameter Adjusted for Site Class Effect (0.2 second)	Equation 16-20 ⁽¹⁾	0.928 ⁽⁴⁾	g
S _{M1} - MCE _R Spectral Response Acceleration Parameter Adjusted for Site Class Effect (1.0 second)	Equation 16-21 ⁽¹⁾	0.331 ⁽⁴⁾	g
S _{DS} - Design Spectral Response Acceleration at 0.2-s	Equation 16-22 ⁽¹⁾	0.619 ⁽⁴⁾	g
S _{D1} - Design Spectral Response Acceleration at 1-s	Equation 16-23 ⁽¹⁾	0.221 ⁽⁴⁾	g
T _o = 0.2 S _{D1} / S _{DS}	Section 11.4.6 ⁽²⁾	0.071	s
T _s = S _{D1} / S _{DS}	Section 11.4.6 ⁽²⁾	0.357	s
T _L - Long Period Transition Period	Figure 22-14 ⁽²⁾	8 ⁽⁴⁾	s
PGA - Peak Ground Acceleration Maximum Considered Earthquake Geometric Mean, MCE _G ^(*)	Figure 22-9 ⁽²⁾	0.402	g
F _{PGA} - Site Coefficient Adjusted for Site Class Effect ⁽²⁾	Table 11.8-1 ⁽²⁾	1 ⁽⁴⁾	-
PGAM - Peak Ground Acceleration ⁽²⁾ Adjusted for Site Class Effect	Equation 11.8-1 ⁽²⁾	0.402 ⁽⁴⁾	g
Design PGA ≈ (2/3 PGAM) - Slope Stability ^(†)	Similar to Eqs. 16-22 & 16-23 ⁽²⁾	0.268	g
Design PGA ≈ (0.4 S _{DS}) - Short Retaining Walls ^(‡)	Equation 11.4-5 ⁽²⁾	0.248	g
C _{RS} - Short Period Risk Coefficient	Figure 22-18A ⁽²⁾	0.921 ⁽⁴⁾	-
C _{R1} - Long Period Risk Coefficient	Figure 22-19A ⁽²⁾	0.924 ⁽⁴⁾	-
SDC - Seismic Design Category ^(§)	Section 1613.2.5 ⁽¹⁾	D ⁽⁴⁾	-
References: ⁽¹⁾ California Building Code (CBC), 2022, California Code of Regulations, Title 24, Part 2, Volume I and II. ⁽²⁾ American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI), 2016, Minimum Design Loads and Associated Criteria for Buildings and Other Structures, Standards 7-16. ⁽³⁾ USGS Unified Hazard Tool - https://earthquake.usgs.gov/hazards/interactive/ [Dynamic: Conterminous U.S. 2014 (update) (v4.2.0)] ⁽⁴⁾ SEI/OSHPD Seismic Design Map Application - https://seismicmaps.org [Reference: ASCE 7-16] Related References: Federal Emergency Management Agency (FEMA), 2015, NEHRP (National Earthquake Hazards Reduction Program) Recommended Seismic Provision for New Building and Other Structures (FEMA P-1050).			
Notes: * PGA Calculated at the MCE return period of 2475 years (2 percent chance of exceedance in 50 years). † PGA Calculated at the Design Level of 2/3 of MCE; approximately equivalent to a return period of 475 years (10 percent chance of exceedance in 50 years). ‡ PGA Calculated for short, stubby retaining walls with an infinitesimal (zero) fundamental period. § The designation provided herein may be superseded by the structural engineer in accordance with Section 1613.2.5.1, if applicable.			

CONCLUSIONS

Site Suitability

From a geotechnical engineering and engineering geologic point of view, the subject property is considered suitable for the proposed development provided the following conclusions and recommendations are incorporated into the design criteria and project specifications.

Primary Geologic/Geotechnical Considerations

Groundwater

Groundwater was encountered in two borings, Borings B-1 and B-3, at 9.5 feet bgs and 10.5 feet bgs, respectively. These borings are located in the northern area of the site. It appears that an area of stormwater runs onto the site in these areas and may correspond to the possible perched groundwater conditions. No groundwater or perched groundwater was encountered in the other exploratory borings to a depth of 19 feet bgs. Regional groundwater is not anticipated to affect the subject development. Potentially, subdrainage may need to be considered in the northern area of the site depending on final design.

Based on review of Vesting Tentative Tract Map and Preliminary Grading Plan (C&V, 2025) and discussion presented in Petra, 2025, the following areas may be a concern:

1. Private Street (Lot B west of 10th Street) and adjacent lots at the west end of the site with a street design elevation of 1,437.38 amsl. Lot B rises to proposed elevation of 1,450.14 amsl where it connects to proposed 10th Street. Therefore, groundwater may be encountered approximately 4 to 17 feet below finish street grade.
2. Private Street (Lot B east of 10th Street) and adjacent lots at the east end of the site with a street design elevation of 1,450.14 amsl rises easterly to 1,471.7amsl where it connects to 9th Street. Therefore, groundwater may be encountered approximately 8 to 20 feet below finish street grade.
3. Private Street (Lot C between 10th Street to 9th Street) and adjacent lots at the north end of the site with a street design elevation of 1,442.5 amsl rises easterly to 1,463.6amsl where it connects to 9th Street. Therefore, groundwater may be encountered approximately 2 to 10 feet below finish street grade.

Fault Rupture

The site is not located within a currently designated State of California Alquist-Priolo Earthquake Fault Zone (CGS, 2024). In addition, no known active faults have been identified on the site. While fault rupture would most likely occur along previously established fault traces, fault rupture could occur at other locations. However, the potential for active fault rupture at the site is considered to be very low.

Strong Ground Motions

The site is located in a seismically active area of southern California and will likely be subjected to very strong seismically related ground shaking during the anticipated life span of the project. Structures within the site should therefore be designed and constructed to resist the effects of strong ground motion in accordance with the 2022 CBC and the seismic parameters included in Table 1, above.

Liquefaction, Landslides and Secondary Seismic Effects

The proposed residential development is mapped mostly within zones of “nominal” liquefaction potential, based on the property being underlain by granitic bedrock. However, the site should be considered nominal liquefaction potential due to lack of groundwater and granitic bedrock within 2.5 to 5 feet of the ground surface based on boring logs (Appendix A).

The site and immediate area exhibit level topography with no existing slopes within or immediately adjacent to the subject property. No landslides or rockfalls are mapped within or in proximity to the subject site.

Secondary effects of seismic activity normally considered as possible hazards to a site include several types of ground failure. Such ground failures, which might occur as a consequence of severe ground shaking at the site, include ground subsidence, ground lurching and lateral spreading. The probability of occurrence of each type of ground failure depends on the severity of the earthquake, distance from faults, topography, subsoils, and groundwater conditions, in addition to other factors. Based on site conditions underlying the subject site, proposed grading, the lack of shallow groundwater, and gentle topography across most of the site, landsliding, liquefaction, ground subsidence, ground lurching and lateral spreading are considered unlikely at the site. The potential for seismic flooding due to a tsunami or seiche is considered negligible.

Compressible Soils

One of the most significant geotechnical factors affecting the project site is the presence of near-surface compressible soil materials within the subject property consisting of undocumented fill and the upper portion of weathered older alluvium. Such materials consist of loose undocumented fill, which is not considered suitable for support of fill or structural loads in its present condition. Based on our subsurface assessment and laboratory test results, remedial removal depths of existing fill soils and highly weathered alluvium underlying the proposed structures expected to be on the order of 2.5 to 5 feet below existing grades. Accordingly, these materials will require removal to competent existing fill or alluvial soils and replacement with properly compacted fill.

Flooding

No surface water was observed onsite during our recent field exploration. Based on Flood Insurance Map (FIRM), the site is located within an area of minimal flood zone hazard (FEMA, 2024). A portion of the Flood Insurance Rate Map (FIRM) for the subject property and vicinity is provided in Figure C.

Stability of Temporary Excavations and Backcuts

Due to adjacent property restrictions adjacent to existing roads, power poles, and residences, temporary excavations along the boundary and within the site will likely be a near-vertical cuts. These cuts are primarily expected to expose moderately hard to hard granitic bedrock with the uppermost portion of the excavation consisting of about 2.5 to 5 feet of topsoil and older alluvium.

Temporary unsupported sidewalls constructed at the recommended maximum slope ratio are expected to remain stable during the remedial grading, however, all temporary slopes should be observed by a representative of the project geotechnical consultant for any evidence of potential instability. Depending on the results of these observations, revised temporary slope configurations may be necessary. Recommendations for remedial grading are provided in the “Earthwork” section of this report.

EARTHWORK RECOMMENDATIONS

Earthwork Criteria

Earthwork should be performed in accordance with the Grading Code of the County of San Diego, in addition to the applicable provisions of the 2022 CBC. Grading should also be performed in accordance with the following site-specific recommendations prepared by Petra based on the proposed construction.

Geotechnical Observations and Testing

Prior to the start of earthwork, a meeting should be held at the site with the owner, contractor, and geotechnical consultant to discuss the work schedule and geotechnical aspects of the grading. Earthwork, which in this instance will generally entail removal and re-compaction of the near surface soils, should be accomplished under full-time observation and testing of the geotechnical consultant. A representative of the project geotechnical consultant should be present onsite during all earthwork operations to document proper placement and compaction of fills, as well as to document compliance with the other recommendations presented herein.

Clearing and Grubbing

All existing weeds, grasses, brush, shrubs, trees/tree stumps, root balls, and similar vegetation existing within areas to be graded should be stripped and removed from the site. Clearing operations should also include the demolition and removal of existing improvements such as septic systems and any remaining trash, debris, vegetation, and similar deleterious materials. Any cavities or excavations created upon removal of buried structures or root balls or any unknown subsurface structures should be cleared of loose soil, shaped to provide access for backfilling and compaction equipment and then backfilled with properly compacted (engineered) fill. Note that deleterious materials may be encountered within the site and may need to be removed by hand, i.e., root pickers, during the grading operations.

The project geotechnical consultant should provide periodic observation and testing services during clearing and grubbing operations to document compliance with the above recommendations. In addition, should unusual or adverse soil conditions or buried structures be encountered during grading that are not described herein, these conditions should be brought to the immediate attention of the project geotechnical consultant for corrective recommendations.

Existing Septic Systems

Although not observed during the investigation, it is likely that there may be remnant septic tanks and/or leach fields at the site. If present, removal of the entire septic system is required and should consist of complete removal of the leach lines, plumbing and septic tank. The excavated areas should be backfilled with compacted fill, placed under full-time geotechnical observation and testing. It is recommended that the septic removal and disposal be conducted in accordance with current local, state, and federal disposal regulations.

Excavation Characteristics

The existing site soils are expected to be readily excavated with conventional earthmoving equipment. If oversized rocks (i.e., 12-inches in one dimension or greater) are encountered, they should either be disposed of either offsite or properly buried within the planned deeper fills, if available, in an approved engineered fashion, a minimum of 10 feet below finish pad grade(s) and 15 feet from slope faces.

Based on the results of our exploratory borings, surficial native soil deposits, including topsoil, old alluvial fan deposits and highly weathered bedrock, are expected to be readily excavatable with conventional heavy earthmoving equipment. Our evaluation of bedrock rippability is discussed below.

- The property is underlain by soft to very hard, granitic bedrock which locally forms outcrops. Exploratory borings were drilled with a hollow-stem auger truck-mounted drill rig up to 19 feet bgs within areas of the site. Drilling progress was difficult but steady.
- Based on the data obtained in the areas where the borings were drilled, the granitic rock encountered is anticipated to be rippable utilizing a D-9 dozer or equivalent, with a single shank in the center slot.

Remedial Grading - General

To create a uniform compacted fill mat below the proposed buildings and reduce the potential for distress due to excessive differential settlement, it is recommended that all near surface low-density native materials soils be removed to underlying competent alluvial materials or granitic bedrock and replaced as properly compacted fill materials. It must be noted that the depths of remedial grading provided herein are estimates only and are based on conditions observed at the boring locations. Subsurface conditions can and usually do vary between points of exploration. For this reason, the actual removal depths will have to be determined on the basis of in-grading observations and testing performed by a representative of the project geotechnical consultant. The Client, civil engineer, and project grading contractor should allow contingencies for additional earthwork quantities should adverse conditions and deeper removals be required.

Ground Preparation – Building Pads

Based on our subsurface exploration and laboratory test results, remedial removal depths on the order of 2.5 to 5 feet below existing grades are expected in the proposed building areas. The horizontal limits of removal and re-compaction should extend to a minimum distance of 5 feet beyond the proposed building footprints. Unsuitable soil removals may also need to be locally deeper, depending on the exposed conditions encountered during grading. The minimum depth of compacted (engineered) fill within the finished building pad should be 4 feet. The actual depths and horizontal limits of removals and over-excavations should be evaluated during grading on the basis of observations and testing performed by the project geotechnical consultant.

Prior to placing engineered fill, all exposed bottom surfaces in the removal areas should be approved by a representative of the project geotechnical consultant and then scarified to a minimum depth of 12 inches, moisture-conditioned to attain approximately 2 percent above optimum moisture, and compacted in-place to no less than 90 percent relative compaction with reference to per ASTM D 1557. All fills should be placed in 6- to 8-inch-thick maximum lifts, watered or air dried as necessary to achieve slightly above-optimum moisture conditions, and then compacted to a minimum relative compaction of 90 percent.

Ground Preparation – Drive Isles and Parking Areas

For proposed drive isles and parking areas, the existing ground surfaces should be over-excavated to a minimum depth of 2 feet below the existing ground surface or 2 feet below the proposed subgrade elevations or the deepest proposed utility if in granitic bedrock, whichever is deeper. Contractors should anticipate groundwater seepage within overexcavation of these streets as well as utility excavations. If groundwater is encountered, standard measures such as sump pumping, localized dewatering, and/or geotechnical observation of temporary slopes may be implemented as appropriate. Subdrainage and proper outletting of the subdrainage should be considered in these cases such as outletting into the water quality basin or storm drain.

Due to this potential shallow groundwater in the area of Streets named Lots B and C, install canyon-type subdrains at completion of remedial removals with outlet to the water quality basin or storm drain in the Lot B Cul-de-sac area. Location and depths are to be determined in the field. Details for canyon subdrains are shown on Plate SG-1 of Appendix E.

After completion of over-excavation and subdrain installation, the areas should be scarified to a minimum depth of 6 inches, moisture-conditioned, and re-compacted to a minimum 90 percent relative compaction during rough grading activities. The excavated materials may be replaced as properly compacted fill. The horizontal limits of over-excavation should extend to a minimum horizontal distance of 12 inches beyond the perimeter of the proposed improvements.

All fills should be placed in 6- to 8-inch-thick maximum lifts, watered or air dried as necessary to achieve slightly above-optimum moisture conditions, and then compacted to a minimum relative compaction of 90 percent with reference to per ASTM D 1557. Prior to paving, the pavement subgrade soils will require rework to a depth of 12 inches to achieve no less than 95 percent relative compaction prior to placement of aggregate base.

Suitability of Site Soils as Fill

Site soils are suitable for use in engineered fills provided they are clean from organics and/or debris. Wet older alluvial soils may also be encountered during site grading (depending upon the time of year grading occurs) and may require drying back before being reused as fill.

Fill Placement

Fill materials should be placed in approximately 6- to 8-inch-thick loose lifts, moisture conditioned (watered or air-dried) as necessary to achieve a moisture content approximately 2 percent above optimum moisture condition, and then compacted in-place to no less than 90 percent relative compaction. The laboratory maximum dry density and optimum moisture content for each major soil type should be determined in accordance with ASTM D 1557.

Import Soils for Grading

If import soils are needed to achieve final design grades, import soils should be free of deleterious materials, oversize rock, and any hazardous materials. The soils should also be non-expansive and essentially non-corrosive and approved by the project geotechnical consultant *prior* to being brought onsite. The geotechnical consultant should inspect the potential borrow site and conduct testing of the soil at least three days before the commencement of import operations.

Shrinkage and Subsidence

Volumetric changes in earth quantities will occur when excavated onsite soils are replaced as properly compacted fill. Following is an estimate of shrinkage factors for the alluvial soil present onsite. These estimates are based on in-place densities of the various materials and on the estimated average degree of relative compaction achieved during grading.

- Disturbed Surface Soils (0 - 2± feet).....Shrinkage of 5 to 10%±
- Alluvium (below 2 - 5± feet).....Shrinkage of 0 to 5%±
- Weathered Granitic Bedrock and Granitic Bedrock (below 5± feet)..... Bulking 0 to 5%±

Subsidence from scarification and re-compaction of exposed bottom surfaces in removal areas to receive fill is expected to vary from negligible to approximately 0.1 foot. The above estimates of shrinkage, bulking and subsidence are intended as an aid for project engineers in determining earthwork quantities. However, these estimates should not be considered as absolute values and should be used with some caution. Contingencies should be made for balancing earthwork quantities based on actual shrinkage, bulking and subsidence that occurs during the grading operations.

Temporary Excavations

Temporary excavations to a depth possibly as much as 15± feet below existing grades may be required to accommodate the recommended over-excavation of unsuitable materials or to construct retaining walls and

subsurface storm water disposal structures. Based on the physical properties of the onsite soils, temporary excavations which are constructed exceeding 4 feet in height should be cut back to a ratio of 0.5:1 (h:v) or flatter for the duration of the over-excavation of unsuitable soil material and replacement as compacted fill, as well as placement of underground utilities. However, the temporary excavations should be observed by a representative of the project geotechnical consultant for evidence of potential instability. Depending on the results of these observations, revised slope configurations may be necessary or appropriate. Other factors which should be considered with respect to the stability of the temporary slopes include construction traffic and/or storage of materials on or near the tops of the slopes, construction scheduling, presence of nearby walls or structures on adjacent properties and weather conditions at the time of construction. Applicable requirements of the California Construction and General Industry Safety Orders, the Occupational Safety and Health act of 1970 and the Construction Safety Act should also be followed.

No temporary excavations along the property lines should be left open without proper protections to reduce safety hazards. The grading contractor is solely responsible for ensuring the safety of construction personnel and the general public, and for appointing a designated “Competent Person” to observe and classify temporary excavation sidewalls pursuant to 29 CFR Part 1926 (OSHA Safety and Health Regulations for Construction).

Cut Slope Construction and Protection

Observations during grading of individual cut slopes by the project engineering geologist to document favorable geologic conditions of the exposed slopes is recommended. The finish surface of cut slope faces should be scaled of any loose rocks and embedded rock fragments prone to raveling. If significant fractured or loose rock is exposed following grading, additional recommendations may be warranted.

Monitoring of Adjacent Properties

Existing adjoining residential structures in the immediate vicinity of temporary excavations may have pre-existing damage, which go unnoticed (hairline cracks, etc.) until some construction activity draws attention to such conditions. Then, it becomes difficult to identify whether damage was pre-existing or has been caused by the construction. To help reduce the risk of such conflicts, it is advisable, though not required, to conduct a pre-construction condition survey of existing structures, especially those located directly along the property lines. This would involve visual inspection and photo and video documentation.

The proposed construction is likely to create vibrations in the vicinity of adjoining structures, due to activities such as excavations into hard or dense earth materials. At your discretion, vibrations be monitored on or near existing buildings and structures in order to reduce the risk of damage to existing buildings and defend against potential future claims.

FOUNDATION DESIGN RECOMMENDATIONS

Allowable Soil Bearing Capacities

Pad Footings

An allowable soil bearing capacity of 1,500 pounds per square foot may be utilized for design of isolated 24-inch-square footings founded at a minimum depth of 12 inches below the lowest adjacent final grade for pad footings that are not a part of the slab system and are used for support of such features as roof overhang, second-story decks, patio covers, etc. This value may be increased by 20 percent for each additional foot of depth and by 10 percent for each additional foot of width, to a maximum value of 2,500 pounds per square foot. The recommended allowable bearing value includes both dead and live loads and may be increased by one-third for short duration wind and seismic forces.

Continuous Footings

An allowable soil bearing capacity of 1,500 pounds per square foot may be utilized for design of continuous footings founded at a minimum depth of 12 inches below the lowest adjacent final grade. This value may be increased by 20 percent for each additional foot of depth and by 10 percent for each additional foot of width, to a maximum value of 2,500 pounds per square foot. The recommended allowable bearing value includes both dead and live loads and may be increased by one-third for short duration wind and seismic forces. Increased bearing capacity for large continuous footings, such as retaining walls, may be appropriate, depending on the as-graded soil/bedrock conditions.

Estimated Footing Settlement

Based on the allowable bearing values provided above, total static settlement of the footings under the anticipated loads is expected to be on the order of 3/4 inch. Differential settlement is expected to be less than 1/2 inch over a horizontal span of 30 feet. The majority of settlement is likely to take place as footing loads are applied or shortly thereafter.

Lateral Resistance

A passive earth pressure of 300 pounds per square foot per foot of depth, to a maximum value of 2,500 pounds per square foot, may be used to determine lateral bearing resistance for footings. The above value may be increased by one-third when designing for transient wind or seismic forces. In addition, a coefficient

of friction of 0.35 times the dead load forces may be used between concrete and the supporting soils to determine lateral sliding resistance. It should be noted that the above values are based on the condition where footings are cast in direct contact with compacted fill or competent native soils. In cases where the footing sides are formed, all backfill placed against the footings upon removal of forms should be compacted to at least 90 percent of the applicable maximum dry density.

Guidelines for Footings and Slab-on-Ground Design and Construction

The results of our laboratory tests performed on representative samples of near-surface soils within the site during our investigation indicate that these materials predominantly exhibit expansion indices that are less than 20. As indicated in Section 1803.5.3 of 2022 California Building Code (2022 CBC), these soils are considered non-expansive and, as such, the design of slabs on-grade is considered to be exempt from the procedures outlined in Sections 1808.6.2 of the 2022 CBC and may be performed using any method deemed rational and appropriate by the project structural engineer. However, the following minimum recommendations are presented herein for conditions where the project design team may require geotechnical engineering guidelines for design and construction of footings and slabs on-grade at the project site.

The design and construction guidelines that follow are based on the above soil conditions and may be considered for reducing the effects of variability in fabric, composition and, therefore, the detrimental behavior of the site soils such as excessive short- and long-term total and differential heave or settlement. These guidelines have been developed on the basis of the previous experience of this firm on projects with similar soil conditions. Although construction performed in accordance with these guidelines has been found to reduce post-construction movement and/or distress, they generally do not positively eliminate all potential effects of variability in soils characteristics and future heave or settlement.

It should also be noted that the suggestions for dimension and reinforcement provided herein are performance-based and intended only as preliminary guidelines to achieve adequate performance under the anticipated soil conditions. However, they should not be construed as replacement for structural engineering analyses, experience, and judgment. The project structural engineer, architect and/or civil engineer should make appropriate adjustments to slab and footing dimensions, and reinforcement type, size and spacing to account for internal concrete forces (e.g., thermal, shrinkage and expansion), as well as external forces (e.g., applied loads) as deemed necessary. Consideration should also be given to minimum design criteria as dictated by local building code requirements.

Conventional Slabs on-Grade System

Given the expansion index of less than 20, as generally exhibited by onsite soils, we recommend that footings and floor slabs be designed and constructed in accordance with the following minimum criteria.

Footings

1. Exterior continuous footings supporting one- and two-story structures should be founded at a minimum depth of 12 inches below the lowest adjacent final grade. Interior continuous footings may be founded at a minimum depth of 10 inches below the top of the adjacent finish floor slabs. The width and spacing of interior continuous footings should be designed by the project structural engineer.
2. In accordance with Table 1809.7 of 2022 CBC for light-frame construction, all continuous footings should have minimum widths of 12 inches for one- and two-story construction. We recommend all continuous footings should be reinforced with a minimum of two No. 4 bars, one top and one bottom.
3. A minimum 12-inch-wide grade beam founded at the same depth as adjacent footings should be provided across the garage entrances or similar openings (such as large doors or bay windows). The grade beam should be reinforced with a similar manner as provided above.
4. Interior isolated pad footings, if required, should be a minimum of 24 inches square and founded at a minimum depth of 12 inches below the bottoms of the adjacent floor slabs. Pad footings should be reinforced with No. 4 bars spaced a maximum of 18 inches on centers, both ways, placed near the bottoms of the footings.
5. Exterior isolated pad footings intended for support of colonnades, roof overhangs, upper-story decks, patio covers, and similar construction should be a minimum of 24 inches square and founded at a minimum depth of 18 inches below the lowest adjacent final grade. The pad footings should be reinforced with No. 4 bars spaced a maximum of 18 inches on centers, both ways, placed near the bottoms of the footings.
6. Exterior isolated pad footings may need to be connected to adjacent pad and/or continuous footings via tie beams at the discretion of the project structural engineer. Further, where excessive soils settlement issues have been identified for this site elsewhere in the report, it is strongly recommended to tie all footings both interior and exterior with a network of grade beams to reduce the potential differential settlement or isolated bearing distress issues below any independent footings.
7. The spacing and layout of the interior concrete grade beam system, if required below floor slabs, should be determined by the project structural engineer in accordance with the WRI publication.
8. The minimum footing dimensions and reinforcement recommended herein may be modified (increased or decreased subject to the constraints of Chapter 18 of the 2022 CBC) by the structural engineer responsible for foundation design based on his/her calculations, engineering experience, and judgment.

Building Floor Slabs

1. Concrete floor slabs should be a minimum 4 inches thick and reinforced with a minimum of No. 3 bars spaced a maximum of 24 inches on centers, both ways. Alternatively, the structural engineer may recommend the use of prefabricated welded wire mesh for slab reinforcement. For this condition, the

welded wire mesh should be of sheet type (not rolled) and should consist of 6x6/W2.9xW2.9 (per the Wire Reinforcement Institute, WRI, designation) or stronger. All slab reinforcement should be supported on concrete chairs or brick to ensure the desired placement near mid-depth. Care should be exercised to prevent warping of the welded wire mesh between the chairs in order to ensure its placement at the desired mid-slab position.

Slab dimension, reinforcement type, size and spacing need to account for internal concrete forces (e.g., thermal, shrinkage and expansion) as well as external forces (e.g., applied loads), as deemed necessary.

It should be noted that some of the non-climatic site parameters, which may impact slabs on-grade performance, are not known at this time, as it is the case for many projects at the design stage. Some of these site parameters include unsaturated soils diffusion conditions pre- and post-construction (e.g., casting the slabs at the end of long, dry or wet periods, maintenance during long, dry and wet periods, etc.), landscaping, alterations in site surface gradient, irrigation, trees, etc. While the effects of any or a combination of these parameters on slab performance cannot be accurately predicted, maintaining moisture content equilibrium within the soils mass and planting trees at a distance greater than half of their mature height away from the edge of foundation may reduce the potential for the adverse impact of these site parameters on slabs on-grade performance.

2. Living area concrete floor slabs and areas to receive moisture sensitive floor covering should be underlain with a moisture vapor retarder consisting of a minimum 10-mil-thick polyethylene or polyolefin membrane that meets the minimum requirements of ASTM E96 and ASTM E1745 for vapor retarders (such as Husky Yellow Guard®, Stego® Wrap, or equivalent). All laps within the membrane should be sealed, and at least 2 inches of clean sand should be placed over the membrane to promote uniform curing of the concrete.

In general, to reduce the potential for punctures, the membrane should be placed on a pad surface that has been graded smooth without any sharp protrusions. If a smooth surface cannot be achieved by grading, consideration should be given to lowering the pad finished grade an additional inch and then placing a 1-inch-thick leveling course of sand across the pad surface prior to the placement of the membrane. Foot traffic on the membrane should be reduced to a minimum. Additional steps would also need to be taken to prevent puncturing of the vapor retarder during concrete placement.

At the present time, some slab designers, geotechnical professionals and concrete experts view the sand layer below the slab (blotting sand) as a place for entrapment of excess moisture that could adversely impact moisture-sensitive floor coverings. As a preventive measure, the potential for moisture intrusion into the concrete slab could be reduced if the concrete is placed directly on the vapor retarder. However, if this sand layer is omitted, appropriate curing methods must be implemented to ensure that the concrete slab cures uniformly. A qualified contractor with experience in slab construction and curing should provide recommendations for alternative methods of curing and supervise the construction process to ensure uniform slab curing.

3. Garage floor slabs should be a minimum 4 inches thick and reinforced in a similar manner as living area floor slabs. Garage slabs should also be poured separately from adjacent wall footings with a positive separation maintained using ¾-inch-minimum felt expansion joint material. To control the propagation of shrinkage cracks, garage floor slabs should be quartered with weakened plane joints. Consideration should be given to placement of a moisture vapor retarder below the garage slab, similar to that provided in Item 2 above, should the garage slab be overlain with moisture sensitive floor covering.

4. Presaturation of the subgrade below floor slabs will not be required; however, prior to placing concrete, the subgrade below all dwelling and garage floor slab areas should be thoroughly moistened to achieve a moisture content that is at least equal to or slightly greater than optimum moisture content. This moisture content should penetrate to a minimum depth of 12 inches below the bottoms of the slabs.
5. The minimum dimensions and reinforcement recommended herein for building floor slabs may be modified (increased or decreased subject to the constraints of Chapter 18 of the 2022 CBC) by the structural engineer responsible for foundation design based on his/her calculations, engineering experience, and judgment.

Post-Tensioned Slabs on-Grade System

In consideration of the expansion index of less than 20, as predominantly exhibited by onsite soils, any rational and appropriate procedure may be chosen by the project structural engineer for the design of post-tensioned slabs on-grade. Should the design engineer choose to follow the latest Code-adopted edition of the procedure published by the Post-Tensioning Institute (PTI DC 10.5), the following minimum design criteria are provided in Table 2, below.

TABLE 2

**Presumptive Post-Tensioned Slab on-Grade Design Parameters for PTI Procedure
Very Low Expansion Potential (Expansion Index, EI, ≤ 20)**

Soil Information	
Approximate Depth of Constant Suction, feet	9
Approximate Soil Suction, pF	3.9
Inferred Thornthwaite Index:	-20
Average Edge Moisture Variation Distance, e_m in feet:	
Center Lift	9.0
Edge Lift	4.7
Anticipated Swell, y_m in inches:	
Center Lift	0.25
Edge Lift	0.45

It should be noted that some of the non-climatic site parameters, which may impact slabs on-grade performance, are not known at this time, as it is the case for many projects at the design stage. Some of these site parameters include unsaturated soils diffusion conditions pre- and post-construction (e.g. casting the slabs at the end of long, dry or wet periods, maintenance during long, dry and wet periods, etc.), landscaping, alterations in site surface gradient, irrigation, trees, etc. While the effects of any or a combination of these parameters on slab performance cannot be accurately predicted, maintaining moisture content equilibrium within the soils mass and planting trees at a distance greater than half of their mature height away from the edge of foundation may reduce the potential for the adverse impact of these site parameters on slabs on-grade performance.

Modulus of Subgrade Reaction

The modulus of subgrade reaction for design of load bearing elements depends on the size of the element and soil-structure interaction. However, as a first level of approximation, this value may be assumed to be 125 pounds per cubic inch.

Minimum Design Recommendations

The soil values provided above may be utilized by the project structural engineer to design post-tensioned slabs on-ground in accordance with Section 1808.6.2 of the 2022 CBC and the PTI publication. Thicker floor slabs and larger footing sizes may be required for structural reasons and should govern the design if more restrictive than the minimum recommendations provided below:

1. Exterior continuous footings for one- and two-story structures should be founded at a minimum depth of 12 inches below the lowest adjacent finished ground surface. Interior footings may be founded at a minimum depth of 10 inches below the tops of the adjacent finish floor slabs. The width and spacing of interior continuous footings should be designed by the project structural engineer.
2. In accordance with Table 1809.7 of 2022 CBC for light-frame construction, all continuous footings should have minimum widths of 12 inches for one- and two-story construction. We recommend all continuous footings should be reinforced with a minimum of two No. 4 bars, one top and one bottom. Alternatively, post-tensioned tendons may be utilized in the perimeter continuous footings in lieu of the reinforcement bars.
3. A minimum 12-inch-wide grade beam founded at the same depth as adjacent footings should be provided across the garage entrances or similar openings (such as large doors or bay windows). The grade beam should be reinforced in a similar manner as provided above.
4. Interior isolated pad footings, if required, should be a minimum of 24 inches square and founded at a minimum depth of 12 inches below the bottoms of the adjacent floor slabs. Pad footings should be reinforced with No. 4 bars spaced a maximum of 18 inches on centers, both ways, placed near the bottoms of the footings.
5. Exterior isolated pad footings intended for support of colonnades, roof overhangs, upper-story decks, patio covers, and similar construction should be a minimum of 24 inches square and founded at a minimum depth of 18 inches below the lowest adjacent final grade. The pad footings should be reinforced with No. 4 bars spaced a maximum of 18 inches on centers, both ways, placed near the bottoms of the footings. Exterior isolated pad footings may need to be connected to adjacent pad and/or continuous footings via tie beams at the discretion of the project structural engineer.
6. The thickness of the floor slabs should be determined by the project structural engineer with consideration given to the expansion index of the onsite soils; however, we recommend that a minimum slab thickness of 4 inches be considered.
7. As an alternative to designing 4-inch-thick post-tensioned slabs with perimeter footings as described in Items 1 and 2 above, the structural engineer may design the foundation system using a thickened slab design. The minimum thickness of this uniformly thick slab should be 7.5 inches.

The engineer in charge of post-tensioned slab design may also opt to use any combination of slab thickness and footing embedment depth as deemed appropriate based on their engineering experience and judgment.

8. Living area concrete floor slabs and areas to receive moisture sensitive floor covering should be underlain with a moisture vapor retarder consisting of a minimum 10-mil-thick polyethylene or polyolefin membrane that meets the minimum requirements of ASTM E96 and ASTM E1745 for vapor retarders (such as Husky Yellow Guard®, Stego® Wrap, or equivalent). All laps within the membrane should be sealed, and at least 2 inches of clean sand should be placed over the membrane to promote uniform curing of the concrete.

In general, to reduce the potential for punctures, the membrane should be placed on a pad surface that has been graded smooth without any sharp protrusions. If a smooth surface cannot be achieved by grading, consideration should be given to lowering the pad finished grade an additional inch and then placing a 1-inch-thick leveling course of sand across the pad surface prior to the placement of the membrane. Foot traffic on the membrane should be reduced to a minimum. Additional steps would also need to be taken to prevent puncturing of the vapor retarder during concrete placement.

At the present time, some slab designers, geotechnical professionals, and concrete experts view the sand layer below the slab (blotting sand) as a place for entrapment of excess moisture that could adversely impact moisture-sensitive floor coverings. As a preventive measure, the potential for moisture intrusion into the concrete slab could be reduced if the concrete is placed directly on the vapor retarder. However, if this sand layer is omitted, appropriate curing methods must be implemented to ensure that the concrete slab cures uniformly. A qualified contractor with experience in slab design and construction should provide recommendations for alternative methods of curing and supervise the construction process to ensure uniform slab curing.

9. Garage floor slabs should be a minimum 4 inches thick and reinforced in a similar manner as living area floor slabs. Consideration should be given to placement of a moisture vapor retarder below the garage slab, similar to that provided in Item 6 above, should the garage slab be overlain with moisture sensitive floor covering.
10. Presaturation of the subgrade below floor slabs will not be required; however, prior to placing concrete, the subgrade below all dwelling and garage floor slab areas should be thoroughly moistened to achieve a moisture content that is at least equal to or slightly greater than optimum moisture content. This moisture content should penetrate to a minimum depth of 12 inches below the bottoms of the slabs.
11. The minimum footing dimensions and foundation design parameters recommended herein are based on our experience, judgement and professional interpretation of the prevailing site soils' characteristics and the inferred site environmental/climatic conditions. At this time, we do not have information regarding potential improvements to be located and/or absent within the zone of influence of the foundation system that could adversely impact the foundation's performance. Such improvements may include, but are not limited to, adjacent lawn/planter areas, irrigation regime, trees located within a horizontal distance of less than half of their mature height from the foundation, and vertical and/or horizontal moisture barriers. A knowledge of these features may allow the designers to perform a refined analysis. However, in the absence of such process, the minimum dimensions provided herein may be modified (increased or decreased subject to the constraints of Chapter 18 of the 2022 CBC and PTI DC 10.5) by the structural engineer responsible for foundation design based on his/her calculations, engineering experience, and judgment.

Footing Observations

Foundation footing trenches should be observed by the project geotechnical consultant to document into competent bearing-soils. The foundation excavations should be observed prior to the placement of forms, reinforcement, or concrete. The excavations should be trimmed neat, level, and square. Prior to placing concrete, all loose, sloughed, or softened soils and/or construction debris should be removed. Excavated soils derived from footing and utility trench excavations should not be placed in slab-on-grade areas unless the soils are compacted to a relative compaction of 90 percent or more.

Preliminary Infiltration Rate

The field falling-head percolation test data was utilized in determining the test infiltration rate, I_t , expressed in units of inches/hour, utilizing the Porchet Method (SARWQCB, 2013). Field testing was conducted in one perforated-cased borehole (with pea gravel surrounding the pipe) at 30-minute intervals for a period of approximately 7 hours. Test data are attached in Appendix D. The infiltration rate, I_t , was calculated by determining the volumetric water flow through the wetted borehole surface area, expressed in terms of inches per hour. Un-factored test results are summarized in the following Table 3.

TABLE 3
Summary of Percolation Test Result*

Test Location	Total Depth (ft.)	Percolation Rate (gal/day/ft ²)	Un-Factored Infiltration Test Rate, I_t (in/hr)
P-1	5.0	0.80	0.07

* Note – Percolation test was performed in approximately the lower 3± feet of the test boreholes.

In view of the test data, the shallow subsurface granitic bedrock exhibits low permeability. It should be noted that **these results are un-factored**. Although the tests did not indicate localized impermeability, variability can be possible due to changes in both material density and gradation. The boring logs indicate that shallow bedrock exists across the site and, therefore, infiltration rates could be consistently very low. However, no infiltration due to the infiltration testing results, soil characteristics, and shallow bedrock. Form I-8 is included in Appendix D.

Preliminary Pavement Design Recommendations

Based upon our experience in the Ramona area of San Diego County, an R-value of 30 was estimated for the subject site. A traffic index (TI) of 6.0 was assumed for 9th Street and 10th Street whereas a TI of 5.0

was assumed for parking lot drive aisles and parking stalls. The traffic index, along with the estimated design R-value, was utilized for preliminary pavement section design. The pavement section has been computed in accordance with Caltrans design procedures and presented in Table 4.

TABLE 4
Preliminary Pavement Design

Location	Design R-value	Traffic Index	Pavement Section
Building Access Aisles and Parking Stalls	30	5.0	3 in. AC / 6 in. AB*
9 th Street, 10 th Street, and Loop Road	30	6.0	4 in. AC / 6 in. AB

Notes:

AC = Asphalt Concrete

AB = Aggregate Base

Subgrade soils immediately below the base should be compacted to 95 percent or more relative compaction based on ASTM D 1557 to a depth of 12 inches or more. Final subgrade compaction should be performed prior to placing base or asphalt-concrete and after utility-trench backfills have been compacted and tested. Subgrade should be firm and unyielding, as exhibited by proof-rolling, prior to placement of aggregate base.

Base materials should consist of Caltrans Class 2 aggregate base. Base materials should be compacted to 95 percent or more relative compaction based on ASTM D 1557. The base materials should be near optimum-moisture content when compacted. Asphalt concrete materials should conform to Section 203-6 of the most recent Standard Specifications for Public Works Construction (Greenbook) or as required by the County of San Diego Public Works Department - Standard Specifications and Detail Drawings.

General Corrosivity Screening

As a screening level study, limited chemical and electrical tests were performed on samples considered representative of the onsite soils to identify potential corrosive characteristics of these soils. The common indicators that are generally associated with soil corrosivity, among other indicators, include water-soluble sulfate (a measure of soil corrosivity on concrete), water-soluble chloride (a measure of soil corrosivity on metals embedded in concrete), pH (a measure of soil acidity), and minimum electrical resistivity (a measure of corrosivity on metals embedded in soils). Test methodology and results are presented in Appendix B.

It should be noted that Petra does not practice corrosion engineering; therefore, the test results, opinion and engineering judgment provided herein should be considered as general guidelines only. Additional analyses, and/or determination of other indicators, would be warranted, especially, for cases where buried metallic building materials (such as copper and cast or ductile iron pipes) in contact with site soils are planned for the project. In many cases, the project geotechnical engineer may not be informed of these choices. Therefore, for conditions where such elements are considered, we recommend that other, relevant project design professionals (e.g., the architect, landscape architect, civil and/or structural engineer, etc.) to be involved. We also recommend considering a qualified corrosion engineer to conduct additional sampling and testing of near-surface soils during the final stages of site grading to provide a complete assessment of soil corrosivity. Recommendations to mitigate the detrimental effects of corrosive soils on buried metallic and other building materials that may be exposed to corrosive soils should be provided by the corrosion engineer as deemed appropriate.

In general, a soil's water-soluble sulfate levels and pH relate to the potential for concrete degradation; water-soluble chlorides in soils impact ferrous metals embedded or encased in concrete, e.g., reinforcing steel; and electrical resistivity is a measure of a soil's corrosion potential to a variety of buried metals used in the building industry, such as copper tubing and cast or ductile iron pipes. Table 5, below, presents test results with an interpretation of current code approach and guidelines that are commonly used in building construction industry. The table includes the code-related classifications of the soils as they relate to the various tests, as well as a general recommendation for possible mitigation measures in view of the potential adverse impact of corrosive soils on various components of the proposed structures in direct contact with site soils. The guidelines provided herein should be evaluated and confirmed, or modified, in their entirety by the project structural engineer, corrosion engineer and/or the contractor responsible for concrete placement for structural concrete used in exterior and interior footings, interior slabs on-ground, garage slabs, wall foundations and concrete exposed to weather such as driveways, patios, porches, walkways, ramps, steps, curbs, etc.

TABLE 5
Soil Corrosivity Screening Results

Test (Test Method Designation)	Test Results	Classification	General Recommendations
Soluble Sulfate (Cal 417)	$\text{SO}_4^{2-} < 0.10\%$ by weight	S0⁽¹⁾ - Not Applicable	Type II cement; minimum $f'_c = 2,500$ psi; no water/cement ratio restrictions.
pH (Cal 643)	6.92 – 7.07	Neutral	No special recommendations
Soluble Chloride (Cal 422)	$\text{Cl}^- < 500$ ppm	C1⁽²⁾ - Moderate	No special recommendations; f'_c should not be less than 2,500 psi.
Resistivity (Cal 643)	2,400 ohm-cm	Highly Corrosive⁽⁵⁾	Consult a Corrosion Engineer

Notes:

1. ACI 318-14, Section 19.3
2. ACI 318-14, Section 19.3
3. Pierre R. Roberge, "Handbook of Corrosion Engineering"
4. Exposure classification C2 applies specifically to swimming pools and appurtenant concrete elements
5. f'_c : 28-day unconfined compressive strength of concrete

POST-GRADING RECOMMENDATIONS

Site Drainage

Surface drainage systems consisting of sloping concrete flatwork, graded earth swales and/or an underground area drain system are anticipated to be constructed to collect and direct all surface waters to the adjacent streets and storm drain facilities. In addition, the ground surface around the proposed buildings should be sloped at a positive gradient away from the structures. The purpose of the precise grading is to prevent ponding of surface water within the level areas of the site and against building foundations and associated site improvements. The drainage systems should be properly maintained throughout the life of the proposed development.

It should be emphasized that the slopes away from the structures area drain inlets and storm drain structures to be properly maintained, not to be obstructed, and that future improvements not to alter established gradients unless replaced with suitable alternative drainage systems.

Slope Landscaping and Maintenance

Adequate slope and pad drainage facilities are essential in the design of grading for the subject site. An anticipated rainfall equivalency on the order of 60 to 100 inches per year at the site can result due to irrigation. The overall stability of the graded slopes should not be adversely affected provided drainage provisions are properly constructed and maintained thereafter and provided engineered slopes are

landscaped immediately following grading with a deep-rooted, drought-tolerant, and maintenance-free plant species, as recommended by the project landscape architect. Additional comments and recommendations are presented below with respect to slope drainage, landscaping, and irrigation.

A common type of slope failure in hillside areas is the surficial instability and usually involves the upper 1 to 6 feet. For a given gradient, these surficial slope failures are generally caused by a wide variety of conditions, such as overwatering, cyclic changes in moisture content and density of slope soils from both seasonal and irrigation-induced wetting and drying, soil expansiveness, time lapse between slope construction and slope planting, type and spacing of plant materials used for slope protection, rainfall intensity and/or lack of a proper maintenance program. Based on this discussion, the following recommendations are presented to mitigate potential surficial slope failures.

- Proper drainage provisions for engineered slopes should consist of concrete terrace drains, downdrains and energy dissipaters (where required) constructed in accordance with the Grading Code of the County of San Diego. Provisions should also be made for construction of compacted-earth berms along the tops of engineered slopes.
- Permanent engineered slopes should be landscaped as soon as practical at the completion of grading. As noted, the landscaping should consist of a deep-rooted, drought-tolerant, and maintenance-free plant species. If landscaping cannot be provided within a reasonable period of time, jute matting (or equivalent) or a spray-on product designed to seal slope surfaces should be considered as a temporary measure to inhibit surface erosion until such time permanent landscape plants have become well-established.
- Irrigation systems should be installed on the engineered slopes and a watering program then implemented which maintains a uniform, near-optimum moisture condition in the soils. Overwatering and subsequent saturation of the slope soils should be avoided. On the other hand, allowing the soils to dry-out is also detrimental to slope performance.
- Irrigation systems should be constructed at the surface only. Construction of sprinkler lines in trenches should not be allowed without prior approval from the geotechnical engineer and engineering geologist.
- A permanent slope-maintenance program should be initiated for major slopes not maintained by individual homeowners. Proper slope maintenance should include the care of drainage- and erosion-control provisions, rodent control, and repair of leaking or damaged irrigation systems.
- Homeowners should be advised of the potential problems that can develop when drainage on the pads and slopes is altered. Drainage can be altered due to the placement of fill and construction of garden walls, retaining walls, walkways, patios, swimming pools, spas, and planters.

Utility Trenches

Utility-trench backfill within street rights-of-way, utility easements, under sidewalks, driveways and building-floor slabs should be compacted to a relative compaction of 90 percent or more. Where onsite soils

are utilized as backfill, mechanical compaction should be used. Density testing, along with probing, should be performed by the project geotechnical consultant or his representative to document adequate compaction. Utility-trench sidewalls deeper than about 4 feet should be laid back at a ratio of 0.5:1 (h:v) or flatter or shored. A trench box may be used in lieu of shoring. If shoring is anticipated, the project geotechnical consultant should be contacted to provide design parameters.

For trenches with vertical walls, backfill should be placed in approximately 1- to 2-foot-thick loose lifts and then mechanically compacted with a hydra-hammer, pneumatic tampers, or similar compaction equipment. For deep trenches with sloped walls, backfill materials should be placed in approximately 8- to 12-inch-thick loose lifts and then compacted by rolling with a sheepfoot tamper or similar equipment.

Where utility trenches are proposed in a direction that parallels any building footing (interior and/or exterior trenches), the bottom of the trench should not be located within a 1:1 (h:v) plane projected downward from the outside bottom edge of the adjacent footing.

EXTERIOR CONCRETE FLATWORK

General

Near-surface compacted fill soils within the site are variable in fines content and expansion behavior with an expectation for the majority of these soils to exhibit an Expansion Index in the range of low expansion potential. For this reason, we recommend that additional testing of subgrade soils be performed at the completion of precise grading in order to provide specific recommendations for all exterior concrete flatwork. However, owing to typical project scheduling constraints, it may not be feasible to collect additional samples of subgrade soils for testing to verify their expansion characteristics in a timely manner; i.e., immediately prior to pouring concrete. As such, we recommend that all exterior concrete flatwork such as sidewalks, patio slabs, large decorative slabs, concrete subslabs that will be covered with decorative pavers, private and/or public vehicular parking, driveways and/or access roads within and adjacent to the site be designed by the project architect, civil and/or structural engineer with consideration given to mitigating the potential cracking, curling, uplift, etc. that can develop in soils exhibiting expansion index values that fall in the upper ranges of the values provided above.

The guidelines that follow should be considered as minimums and are subject to review and revision by the project architect, civil engineer, structural engineer and/or landscape consultant as deemed appropriate. If sufficient time will be allowed in the project schedule for verification sampling and testing prior to the concrete pour, the test results may dictate that a somewhat less conservative design could be used.

Subgrade Preparation

Compaction

To reduce the potential for distress to concrete flatwork, the subgrade soils below concrete flatwork areas to a minimum depth of 12 inches (or deeper, as either prescribed elsewhere in this report or determined in the field) should be moisture conditioned to at least equal to, or slightly greater than, the optimum moisture content and then compacted to a minimum relative compaction of 90 percent. Where concrete public roads, concrete segments of roads and/or concrete access driveways and heavy recreational vehicles parking are proposed, the upper 6 inches of subgrade soil should be compacted to a minimum 95 percent relative compaction.

Pre-Moistening

As a further measure to reduce the potential for concrete flatwork distress, subgrade soils should be thoroughly moistened prior to placing concrete. The moisture content of the soils should be at least 1.2 times the optimum moisture content and penetrate to a minimum depth of 12 inches into the subgrade. Flooding or ponding of the subgrade is not considered feasible to achieve the above moisture conditions since this method would likely require construction of numerous earth berms to contain the water. Therefore, moisture conditioning may be achieved with sprinklers or a light spray applied to the subgrade over a period of few to several days just prior to pouring concrete. Pre-watering of the soils is intended to promote uniform curing of the concrete, reduce the development of shrinkage cracks and reduce the potential for differential expansion pressure on freshly poured flatwork. A representative of the project geotechnical consultant should observe and verify the density and moisture content of the soils, and the depth of moisture penetration prior to pouring concrete.

Thickness and Joint Spacing

To reduce the potential of unsightly cracking, concrete walkways, patio-type slabs, large decorative slabs and concrete subslabs to be covered with decorative pavers should be at least 4 inches thick and provided with construction joints or expansion joints every 6 feet or less. Private driveways that will be designed for the use of passenger cars for access to private garages should also be at least 4 inches thick and provided with construction joints or expansion joints every 10 feet or less. Concrete pavement that will be designed based on an unlimited number of applications of an 18-kip single-axle load in public access areas, segments of road that will be paved with concrete (such as bus stops and cross-walks) or access roads and driveways, which serve multiple residential units or garages, that will be subject to heavy truck loadings and recreational vehicles parking should have a minimum thickness of 5 inches and be provided with control joints spaced at maximum 10-foot intervals. A modulus of subgrade reaction of 125 pounds per cubic foot may be used for design of the public and access roads.

Reinforcement

All concrete flatwork having their largest plan-view panel dimensions exceeding 10 feet should be reinforced with a minimum of No. 3 bars spaced 18 inches for 4-inch-thick slabs and No. 4 bars spaced 24 inches for 5-inch-thick slabs on centers, both ways. Alternatively, the slab reinforcement may consist of welded wire mesh of the sheet type (not rolled) with 6x6/W1.4xW1.4 designations for 4-inch-thick slabs and 6x6/W2.9xW2.9 designations for 5-inch-thick slabs in accordance with the Wire Reinforcement Institute (WRI). The reinforcement should be properly positioned near the middle of the slabs. All foot and equipment traffic on the reinforcement should be avoided or reduced to a minimum.

The reinforcement recommendations provided herein are intended as a guideline to achieve adequate performance for anticipated soil conditions. As such, this guideline may not satisfy certain acceptable approaches, e.g. the area of reinforcement to be equal to or greater than 0.2 percent of the area of concrete. The project architect, civil and/or structural engineer should make appropriate adjustments in reinforcement type, size and spacing to account for concrete internal (e.g., shrinkage and thermal) and external (e.g., applied loads) forces as deemed necessary.

Edge Beams (Optional)

Where the outer edges of concrete flatwork are to be bordered by landscaping, it is recommended that consideration be given to the use of edge beams (thickened edges) to prevent excessive infiltration and accumulation of water under the slabs. Edge beams, if used, should be 6 to 8 inches wide, extend 8 inches below the tops of the finish slab surfaces. Edge beams are not mandatory; however, their inclusion in flatwork construction adjacent to landscaped areas is intended to reduce the potential for vertical and horizontal movement and subsequent cracking of the flatwork related to uplift forces that can develop in expansive soils.

Drainage

Drainage from patios and other flatwork areas should be directed to local area drains and/or graded earth swales designed to carry runoff water to the adjacent streets or other approved drainage structures. The concrete flatwork should be sloped at a minimum gradient of one percent, or as prescribed by project civil engineer or local codes, away from building foundations, retaining walls, masonry garden walls and slope areas.

Tree Wells

Tree wells are not recommended in concrete flatwork areas because they typically introduce excessive water into the subgrade soils and allow root invasion, both of which can cause heaving and cracking of the flatwork.

Retaining Walls

We understand that masonry block and mechanically stabilized earth (MSE) retaining walls with retained height of up to 20 feet are planned for the project, however, retaining wall details were not available at the time of preparation of this report. As such, the following generic recommendations should be considered tentative. Upon preparation of detailed retaining wall design, they should be provided to us to perform retaining wall stability analysis and verify the recommendations provided herein.

Footing/Wall Base Embedment

The base of retaining-walls constructed on level ground may be founded at a depth of 12 inches or more below the lowest adjacent final grade for low height walls. Where retaining walls are proposed on or within 15 feet from the top of adjacent descending fill slope, the wall base should be deepened such that a horizontal clearance of 7 feet or more is maintained between the outside bottom edges of the wall base and the face of the slope. The above-recommended wall base setback is preliminary and may be revised based on site-specific soil conditions. Wall base trenches should be observed by the project geotechnical representative to document that the wall base trenches have been excavated into competent bearing soils and to the embedment recommended above. These observations should be performed prior to any other related construction.

Allowable Bearing Values and Lateral Resistance

Where applicable, retaining wall base may be designed using the allowable bearing values and lateral resistance values provided previously for building foundations; however, when calculating passive resistance, the resistance of the upper 6 inches of the soil cover in front of the wall should be ignored in areas where the front of the wall will not be covered with concrete flatwork. The bearing values for individual large footings may be increased, based on the as-graded soil/bedrock conditions. Such increase would entail a field evaluation by the engineering geologist.

Active Earth Pressures

As of the date of this report, it is uncertain whether the proposed retaining walls will be backfilled with on-site soils or imported granular materials. For this reason, active and at-rest earth pressures are provided below for both conditions. However, considering that the onsite earth materials have an expansion index corresponding to Very Low expansion potential, the use of imported granular materials for backfilling behind the retaining walls, as described in the following sections, is optional.

1. Onsite Soils Used for Backfill

Assuming onsite soils are Low in expansion potential, active earth pressures equivalent to fluids having a density of 40 psf/ft and 61 psf/ft should be used for design of cantilevered walls retaining a level backfill and ascending 2:1 backfill, respectively. For walls that are restrained at the top, at-rest earth pressures of 60 pounds per cubic foot (equivalent fluid pressures) should be used. The above values are for retaining walls that have been supplied with a proper subdrain system (see Figure RW-1). All walls should be designed to support any adjacent structural surcharge loads imposed by other nearby walls or footings in addition to the above recommended active and at-rest earth pressures.

2. Imported Sand, Pea Gravel or Rock Used for Wall Backfill

Imported clean sand exhibiting a sand equivalent value (SE) of 30 or greater, pea gravel or crushed rock may be used for wall backfill to reduce the lateral earth pressures provided these granular backfill materials extend behind the walls to a minimum horizontal distance equal to one-half the wall height. In addition, the sand, pea gravel or rock backfill materials should extend behind the walls to a minimum horizontal distance of 2 feet at the base of the wall or to a horizontal distance equal to the heel width of the footing, whichever is greater (see Figures RW-2 and RW-3). For the above conditions, cantilevered walls retaining a level backfill and ascending 2:1 backfill may be designed to resist active earth pressures equivalent to fluids having densities of 30 and 41 pounds per cubic foot, respectively. For walls that are restrained at the top, at-rest earth pressures equivalent to fluids having densities of 45 and 62 pounds per cubic foot are recommended for design of restrained walls supporting a level backfill and ascending 2:1 backfill, respectively. These values are also for retaining walls supplied with a proper subdrain system. Furthermore, as with native soil backfill, the walls should be designed to support any adjacent structural surcharge loads imposed by other nearby walls or footings in addition to the recommended active and at-rest earth pressures.

All structural calculations and details should be provided to the project geotechnical consultant for verification purposes prior to grading and construction phases.

Earthquake Loads on Retaining Walls

Note 1 of Section 1803.5.12 of the 2022 CBC indicates that the seismic lateral earth pressures on foundation walls and retaining walls supporting more than 6 feet of backfill height due to design earthquake ground motions be determined. Thus, the proposed masonry block or MSE wall and any other wall retaining more than 6 feet of backfill should be designed for the seismic pressures provided in this section.

Per Section 1613.1 of the 2022 CBC, structures shall be designed and constructed to resist the effects of earthquake motions in accordance with ASCE 7. From Table 1, the design PGA for retaining walls is 0.268g for this site. This value was used in the Seed and Whitman (1970) simplified calculation for level conditions behind retaining structures.

According to the research of Sitar, et al. (2012), the simplified Seed and Whitman calculation is appropriate for use for both cantilever retaining walls and restrained walls.

Restrained Walls

For restrained walls, the horizontal ground acceleration value k_h may be assumed to equal the peak ground acceleration. Thus, $k_h = a_g = 0.268g$

From Seed and Whitman (1970), the lateral load on a retaining structure can be determined by the following equation:

$$P_D = \gamma \left(\frac{3}{4} \right) K_h$$

where P_D = Dynamic Lateral Earth Pressure, pcf

γ = weight of soil = 120 pcf, and

K_h = horiz. ground acceleration

thus, $P_D = (120 \text{ pcf}) \left(\frac{3}{4} \right) (0.268) = 24.1 \text{ pcf}$, **use 24 pcf.**

The distribution of the seismic lateral load is discussed below.

Cantilever Retaining Walls

The horizontal ground acceleration value k_h for cantilever retaining walls may be assumed to be equal to half of the peak ground acceleration. Thus, $k_h = \frac{1}{2} (a_g) = (0.5) (0.268g) = 0.134g$.

From Seed and Whitman (1970), the lateral load on a retaining structure can be determined by the following equation:

$$P_D = \gamma \left(\frac{3}{4} \right) K_h$$

where P_D = Dynamic Lateral Earth Pressure, pcf


γ = weight of soil = 120 pcf, and

K_h = horiz. ground acceleration

thus, $P_D = (120 \text{ pcf}) \left(\frac{3}{4} \right) (0.134) = 12.1 \text{ pcf}$, **use 12 pcf.**

Sitar, et al. (2012) indicates that the seismic earth pressures have a triangular distribution with the largest load occurring at the bottom of the wall.

The distribution of the seismic lateral load for both types of walls is as follows:

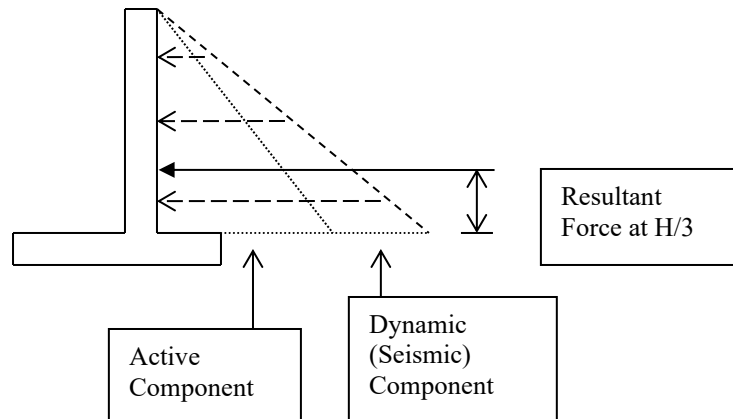

Soil Parameters for MSE Wall Design

A typical cross-section of the proposed MSE wall is shown below. The soil parameters provided in Table 6 below should be used for the structural design of the wall.

TABLE 6
Soil Parameters for MSE Wall Design

Soil Location	Unit Weight (pcf)	Cohesion (psf)	Friction Angle (degrees)
Retained Soil – Topsoil & Alluvium	120	200	28
Retained Soil – Bedrock	125	0	38
Geosynthetic-Reinforced Soil	120	0	32
Foundation Soil - Bedrock	125	0	38

Geotechnical Observation and Testing

All grading associated with retaining wall construction, including backcut excavations, observation of the footing and wall base trenches, installation of the subdrainage systems, and placement of backfill should be provided by a representative of the project geotechnical consultant.

Backdrains

To reduce the likelihood of the entrapment of water in the backfill soils, weepholes or open vertical masonry joints may be considered for masonry block retaining walls not exceeding a height of 3 feet. Weepholes, if used, should be 2-inches minimum diameter and provided at intervals of 6 feet or less along the wall. Open vertical masonry joints, if used, should be provided at 32-inch intervals. A continuous gravel fill, 6 inches by 12 inches, should be placed behind the weepholes or open masonry joints. The gravel should be wrapped in filter fabric to prevent infiltration of fines and subsequent clogging of the gravel. Filter fabric may consist of Mirafi 140N or equivalent.

A perforated pipe-and-gravel backdrain should be constructed behind retaining walls exceeding a height of 3 feet (see Figure RW-1). Perforated pipe should consist of 4-inch-minimum diameter PVC Schedule 40, or ABS SDR-35, with the perforations laid down. The pipe should be encased in a 1-foot-wide column of $\frac{3}{4}$ -inch to 1½-inch open-graded gravel. If on-site soils are used as backfill, the open-graded gravel should extend above the wall footings to a minimum height equal to one-third the wall height or to a minimum height of 1.5 feet above the footing, whichever is greater. The open-graded gravel should be completely wrapped in filter fabric consisting of Mirafi 140N or equivalent. Solid outlet pipes should be connected to the subdrains and then routed to a suitable area for discharge of accumulated water.

Waterproofing

The backfilled sides of masonry block retaining walls should be coated with an approved waterproofing compound or covered with a similar material to inhibit migration of moisture through the walls.

Temporary Excavations

Temporary slopes may be cut at a gradient no steeper than 1:1 (h:v). However, the project geotechnical engineer should observe temporary slopes for evidence of potential instability. Depending on the results of these observations, flatter slopes may be necessary. The potential effects of various parameters such as weather, heavy equipment travel, storage near the tops of the temporary excavations and construction scheduling should also be considered in the stability of temporary slopes.

Wall Backfill

Recommended active and at-rest earth pressures for design of retaining walls are based on the physical and mechanical properties of the onsite soil materials. The backfill behind the proposed retaining walls, they should be placed in approximately 6- to 8-inch-thick maximum lifts, watered as necessary to achieve near optimum moisture conditions, and then mechanically compacted in place to a minimum relative compaction

of 90 percent. Flooding or jetting of the backfill materials should be avoided. A representative of the project geotechnical consultant should observe the backfill procedures and test the wall backfill to verify adequate compaction.

Masonry Block Screen Walls

Construction On or Near the Tops of Descending Slopes

Continuous footings for masonry walls proposed on or within 5 feet from the top of a descending cut or fill slope should be deepened such that a horizontal clearance of 5 feet is maintained between the outside bottom edge of the footing and the slope face. The footings should be reinforced with two No. 4 bars, one top and one bottom. Plans for top-of-slope masonry walls proposing pier and grade beam footings should be reviewed by the project geotechnical consultant prior to construction.

Construction on Level Ground

Where masonry walls are proposed on level ground and 5 feet or more from the tops of descending slopes, the footings for these walls may be founded 18 inches or more below the lowest adjacent final grade. These footings should also be reinforced with two No. 4 bars, one top and one bottom.

Construction Joints

In order to reduce the potential for unsightly cracking related to the effects of differential settlement, positive separations (construction joints) should be provided in the walls at horizontal intervals of approximately 20 to 25 feet and at each corner. The separations should be provided in the blocks only and not extend through the footings. The footings should be placed monolithically with continuous rebars to serve as effective "grade beams" along the full lengths of the walls.

CONSTRUCTION SERVICES

This report has been prepared for the exclusive use of Warmington Residential to assist the project engineers and architect in the design of the proposed development. It is recommended that Petra be engaged to review the final-design drawings and specifications prior to construction. This is to document that the recommendations contained in this report have been properly interpreted and are incorporated into the project specifications. If Petra is not accorded the opportunity to review these documents, we can take no responsibility for misinterpretation of our recommendations.

We recommend that Petra be retained to provide soil-engineering services during construction of the excavation and foundation phases of the work. This is to observe compliance with the design, specifications,

or recommendations and to allow design changes if subsurface conditions differ from those anticipated prior to start of construction.

If the project plans change significantly (e.g., building loads or type of structures), we should be retained to review our original design recommendations and their applicability to the revised construction. If conditions are encountered during construction that appears to be different than those indicated in this report, this office should be notified immediately. Design and construction revisions may be required.

LIMITATIONS

This report is based on the project, as described and the geotechnical data obtained from the field tests performed and our laboratory test data. The materials encountered on the project site and utilized in our laboratory evaluation are believed representative of the total area. However, soil materials can vary in characteristics between excavations, both laterally and vertically.

The conclusions and opinions contained in this report are based on the results of the described geotechnical evaluations and represent our professional judgment. The findings, conclusions and opinions contained in this report are to be considered tentative only and subject to confirmation by the undersigned during the construction process. Without this confirmation, this report is to be considered incomplete and Petra or the undersigned professionals assume no responsibility for its use. In addition, this report should be reviewed and updated after a period of one year or if the site ownership or project concept changes from that described herein.

The professional opinions contained herein have been derived in accordance with current standards of practice and no warranty is expressed or implied.


Respectfully submitted,

PETRA GEOSCIENCES, INC.



Jim Larwood
Principal Geologist
CEG 1897

JL/SJ/lv


11/26/25

Siamak Jafroudi, Ph.D.
Senior Principal Engineer
GE 2024



REFERENCES

- American Concrete Institute, 2014, Building Code Requirements for Structural Concrete (ACI 318-14) and Commentary, Committee 318.
- American Society of Civil Engineers (ASCE/SEI), 2016, Minimum Design Load for Buildings and Other Structures, Standards 7-16.
- Bryant, W.A., and Hart, E.W., 2007, Fault-Rupture Hazard Zones in California, Alquist-Priolo Earthquake Fault Zoning Act with Index to Earthquake Fault Zones Maps, California Geological Survey, Special Publication 42.
- C&V, 2025, Vesting Tentative Tract Map and Preliminary Grading Plan, received November 20.
- California Building Code (2022), California Code of Regulations, Title 24, Par 2, Volume 2 of 2, Based on the 2021 International Building Code, California Building Standards Commission.
- California Department of Water Resources, Division of Safety of Dams (DSOS), California Dam Breach Inundation Maps, <https://fnds.water.ca.gov/maps/damim>, Accessed October 2024.
- California Department of Water Resources, 2004, “Region South Coast, Santa Maria Valley Groundwater Basin,” California’s Groundwater Bulletin 118, dated February 27 (updated).
- California Department of Water Resources, 2024a, Groundwater Basin boundary Descriptions, San Diego Region (9-XXX Basins), <https://lab.data.ca.gov/dataset/groundwater-basin-boundary-descriptions-san-diego-region-9-xxx-basins>.
- _____, 2024b, Water Data Library, <http://www.water.ca.gov/waterdatalibrary/groundwater/>.
- California Geological Survey (CGS), 2024, California Earthquake Hazards Zone Application (EQ Zapp), <https://www.conservation.ca.gov/cgs/geohazards/eq-zapp>, searched October 2024.
- Cao, T., et al., 2003, Revised 2002 California Probabilistic Seismic Hazard Maps, June 2003: California Geological Survey.
- County of San Diego, 2020, Best Management Design Manual, September 15.
- Federal Emergency Management Agency (FEMA), 2009, NEHERP (National Earthquake Hazards Reduction Program) Recommended Seismic Provision for New Building and Other Structures (FEMA P-750).
- Google Earth™ 2024, by Google Earth, Inc., <http://www.google.com/earth/index.html>, accessed October.
- Greenbook, 2012, Standard Specifications for Public Works Construction, by Public Works Standards, Inc., BNI Publishers.
- Hernandez, Janis L., Todd, Victoria R., Busch, Lawrence L., Tan, Siang S., 2007, Geologic Map of the San Pasqual 7.5’ Quadrangle, San Diego County, California: A Digital Database, Version 1.0.
- International Conference of Building Officials, 1998, “Maps of Known Active Fault Near-Source Zones in California and Adjacent Portions of Nevada”, California Division of Mines and Geology.

REFERENCES (cont'd)

Jennings, C.W. and Bryant, W.A., 2010, *Fault Activity Map of California*: California Geological Survey, Geologic Data Map No. 6.

Office of Statewide Health Planning and Development (OSHPD), 2024, Seismic Design Maps, [U.S. Seismic Design Maps \(seismicmaps.org\)](https://seismicmaps.org)

Post-Tensioning Institute, 2012, Standard Requirements for Design and Analysis of Shallow Post-Tensioned Concrete Foundation on Expansive Soils, Publication PTI DC1010.5-12.

Petra Geosciences, Inc., 2025, Addendum Geotechnical Letter, Proposed 9th Street Condominiums, APNs 284-202-21, 284-203-08, 284-205-01, 284-244-01, 9th Street project, Ramona Area of San Diego County, California, J.N. 24-321, dated November 7.

Southern California Earthquake Center (SCEC), 1999, Recommended Procedures for Implementation of DMG Special Publication 117, Guidelines for Analyzing and Mitigating Liquefaction Hazards in California: organized through the Southern California Earthquake Center, University of Southern California.


Tokimatsu, K. and Seed, H.B., 1987; Evaluation of Settlements in Sands due to Earthquake Shaking: *in Journal of Geotechnical Engineering*, Vol. 113, No. 8, p. 861-879.

UC Santa Barbara Library, 2024, accessed March, http://mil.library.ucsb.edu/ap_indexes/FrameFinder/

Wire Reinforcement Institute (WRI), 1996, Design of Slabs on Ground.

FIGURES

NATIVE SOIL BACKFILL

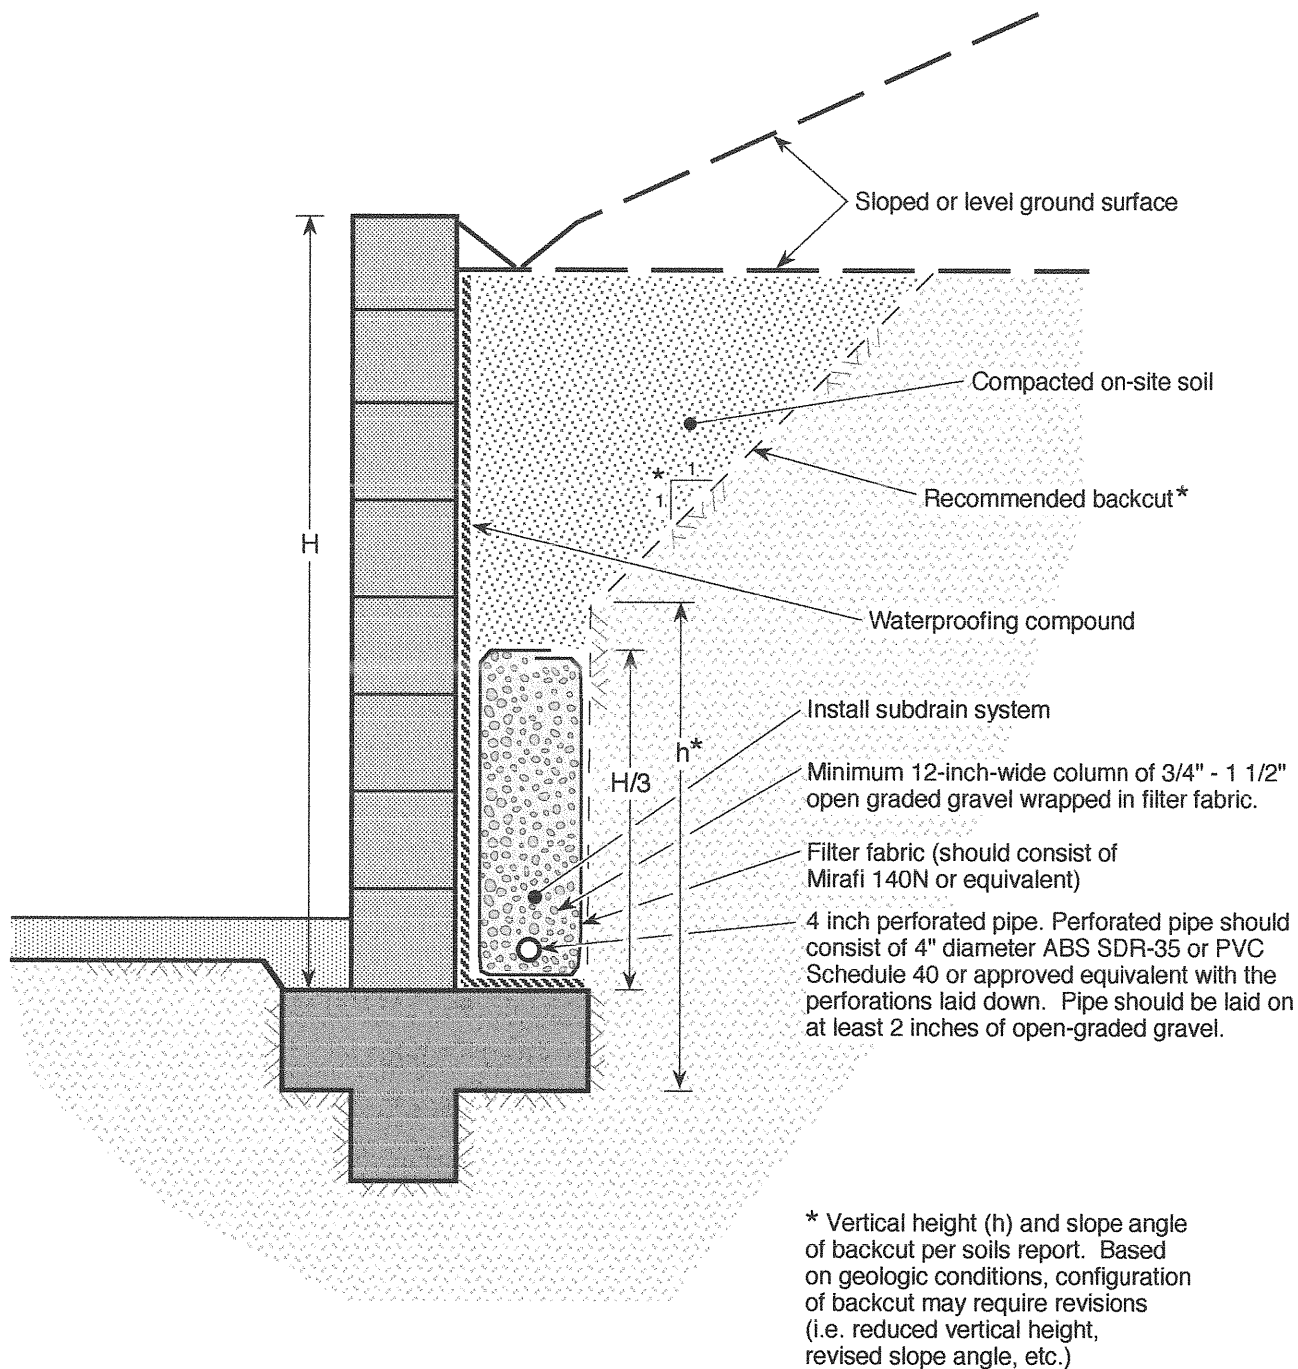


PETRA

**RETAINING WALL BACKFILL
AND SUBDRAIN DETAILS**

FIGURE RW-1

IMPORTED SAND BACKFILL

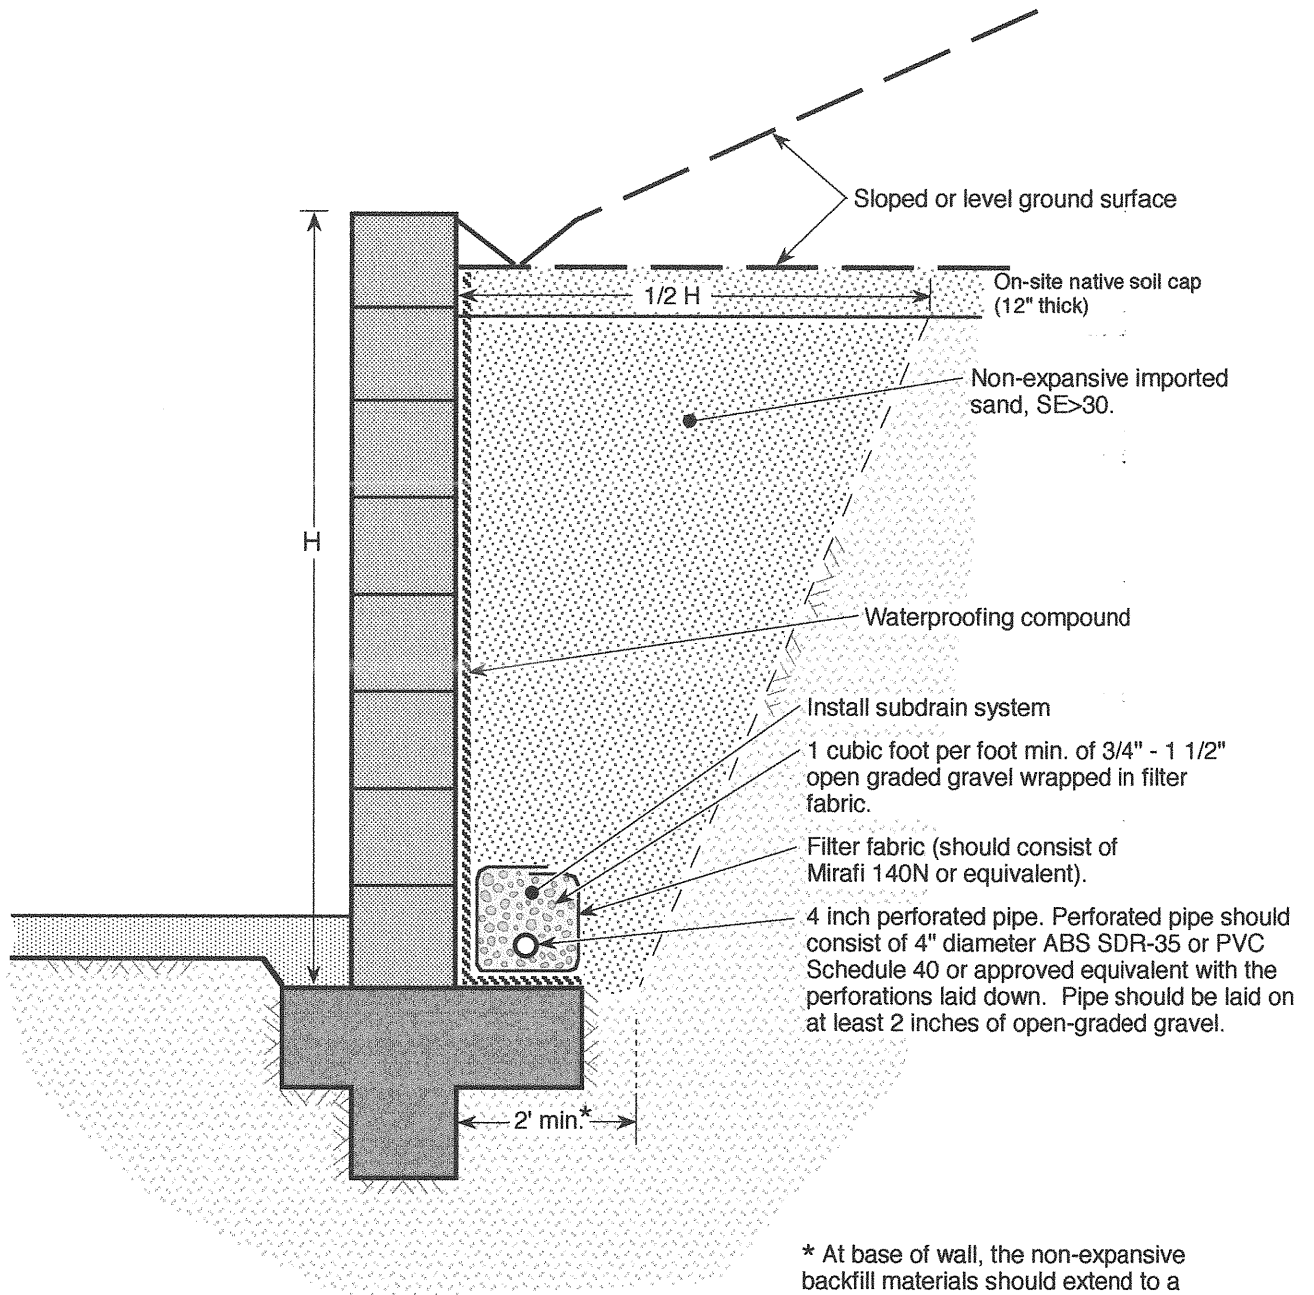

* At base of wall, the non-expansive backfill materials should extend to a min. distance of 2' or to a horizontal distance equal to the heel width of the footing, whichever is greater.




PETRA

**RETAINING WALL BACKFILL
AND SUBDRAIN DETAILS**

FIGURE RW-2

IMPORTED GRAVEL OR CRUSHED ROCK BACKFILL

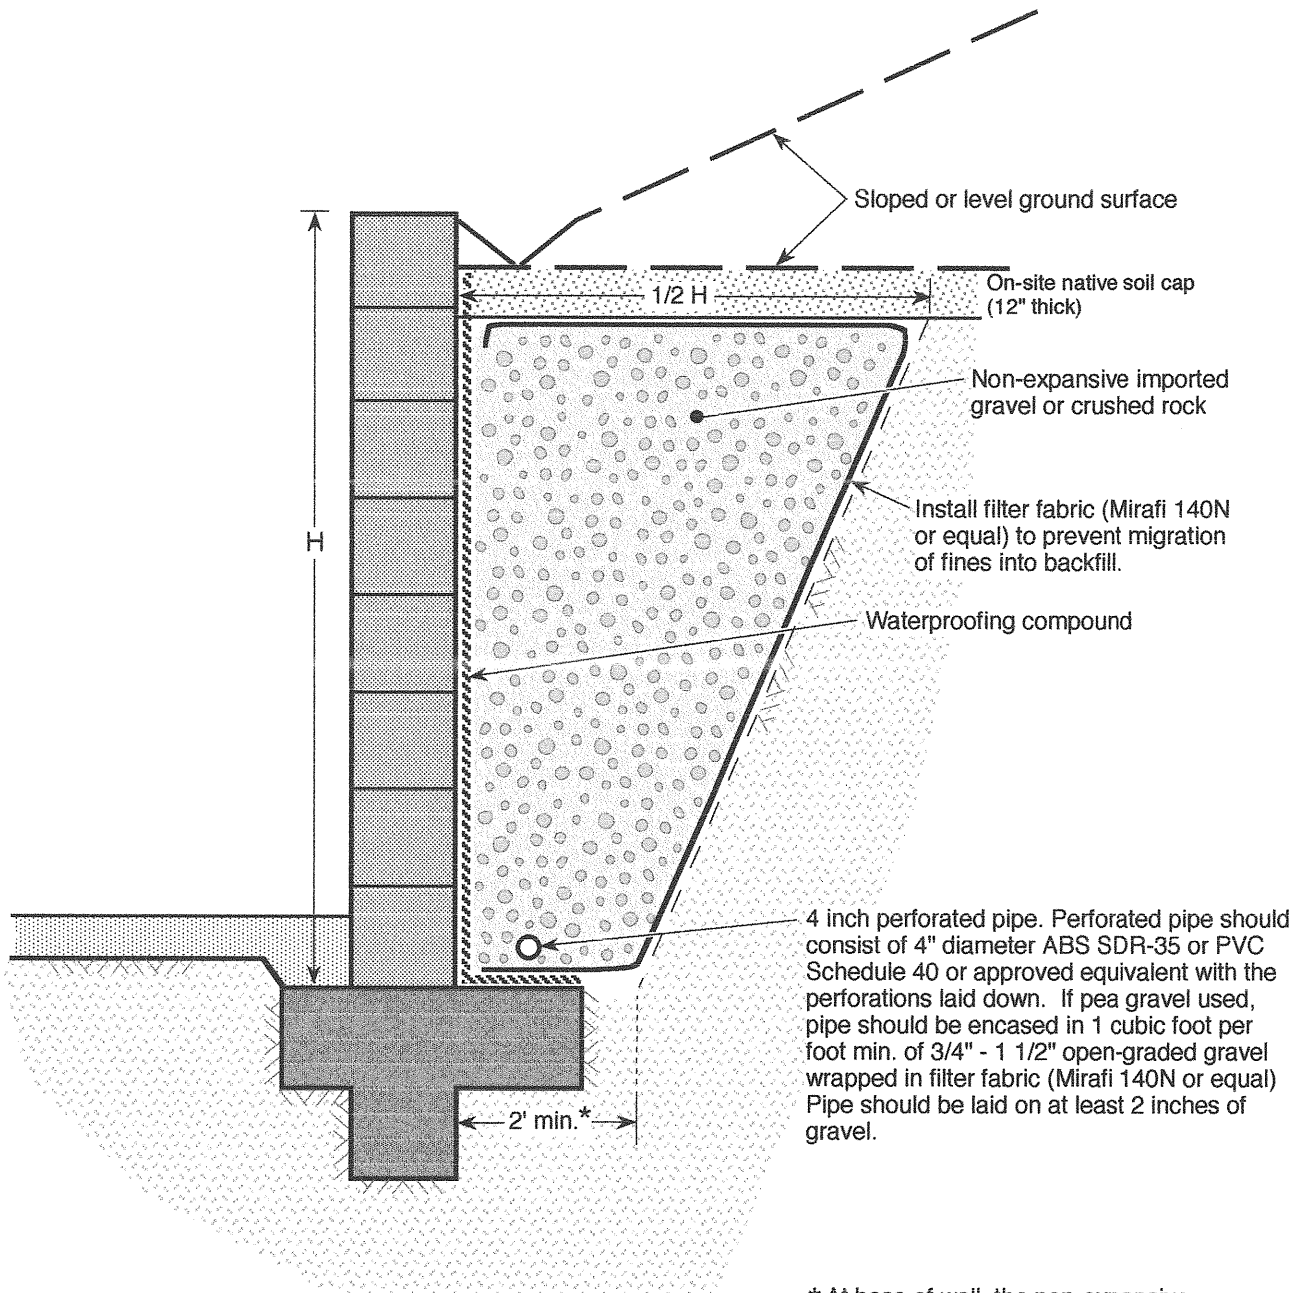


* At base of wall, the non-expansive backfill materials should extend to a min. distance of 2' or to a horizontal distance equal to the heel width of the footing, whichever is greater.



PETRA

**RETAINING WALL BACKFILL
AND SUBDRAIN DETAILS**

FIGURE RW-3

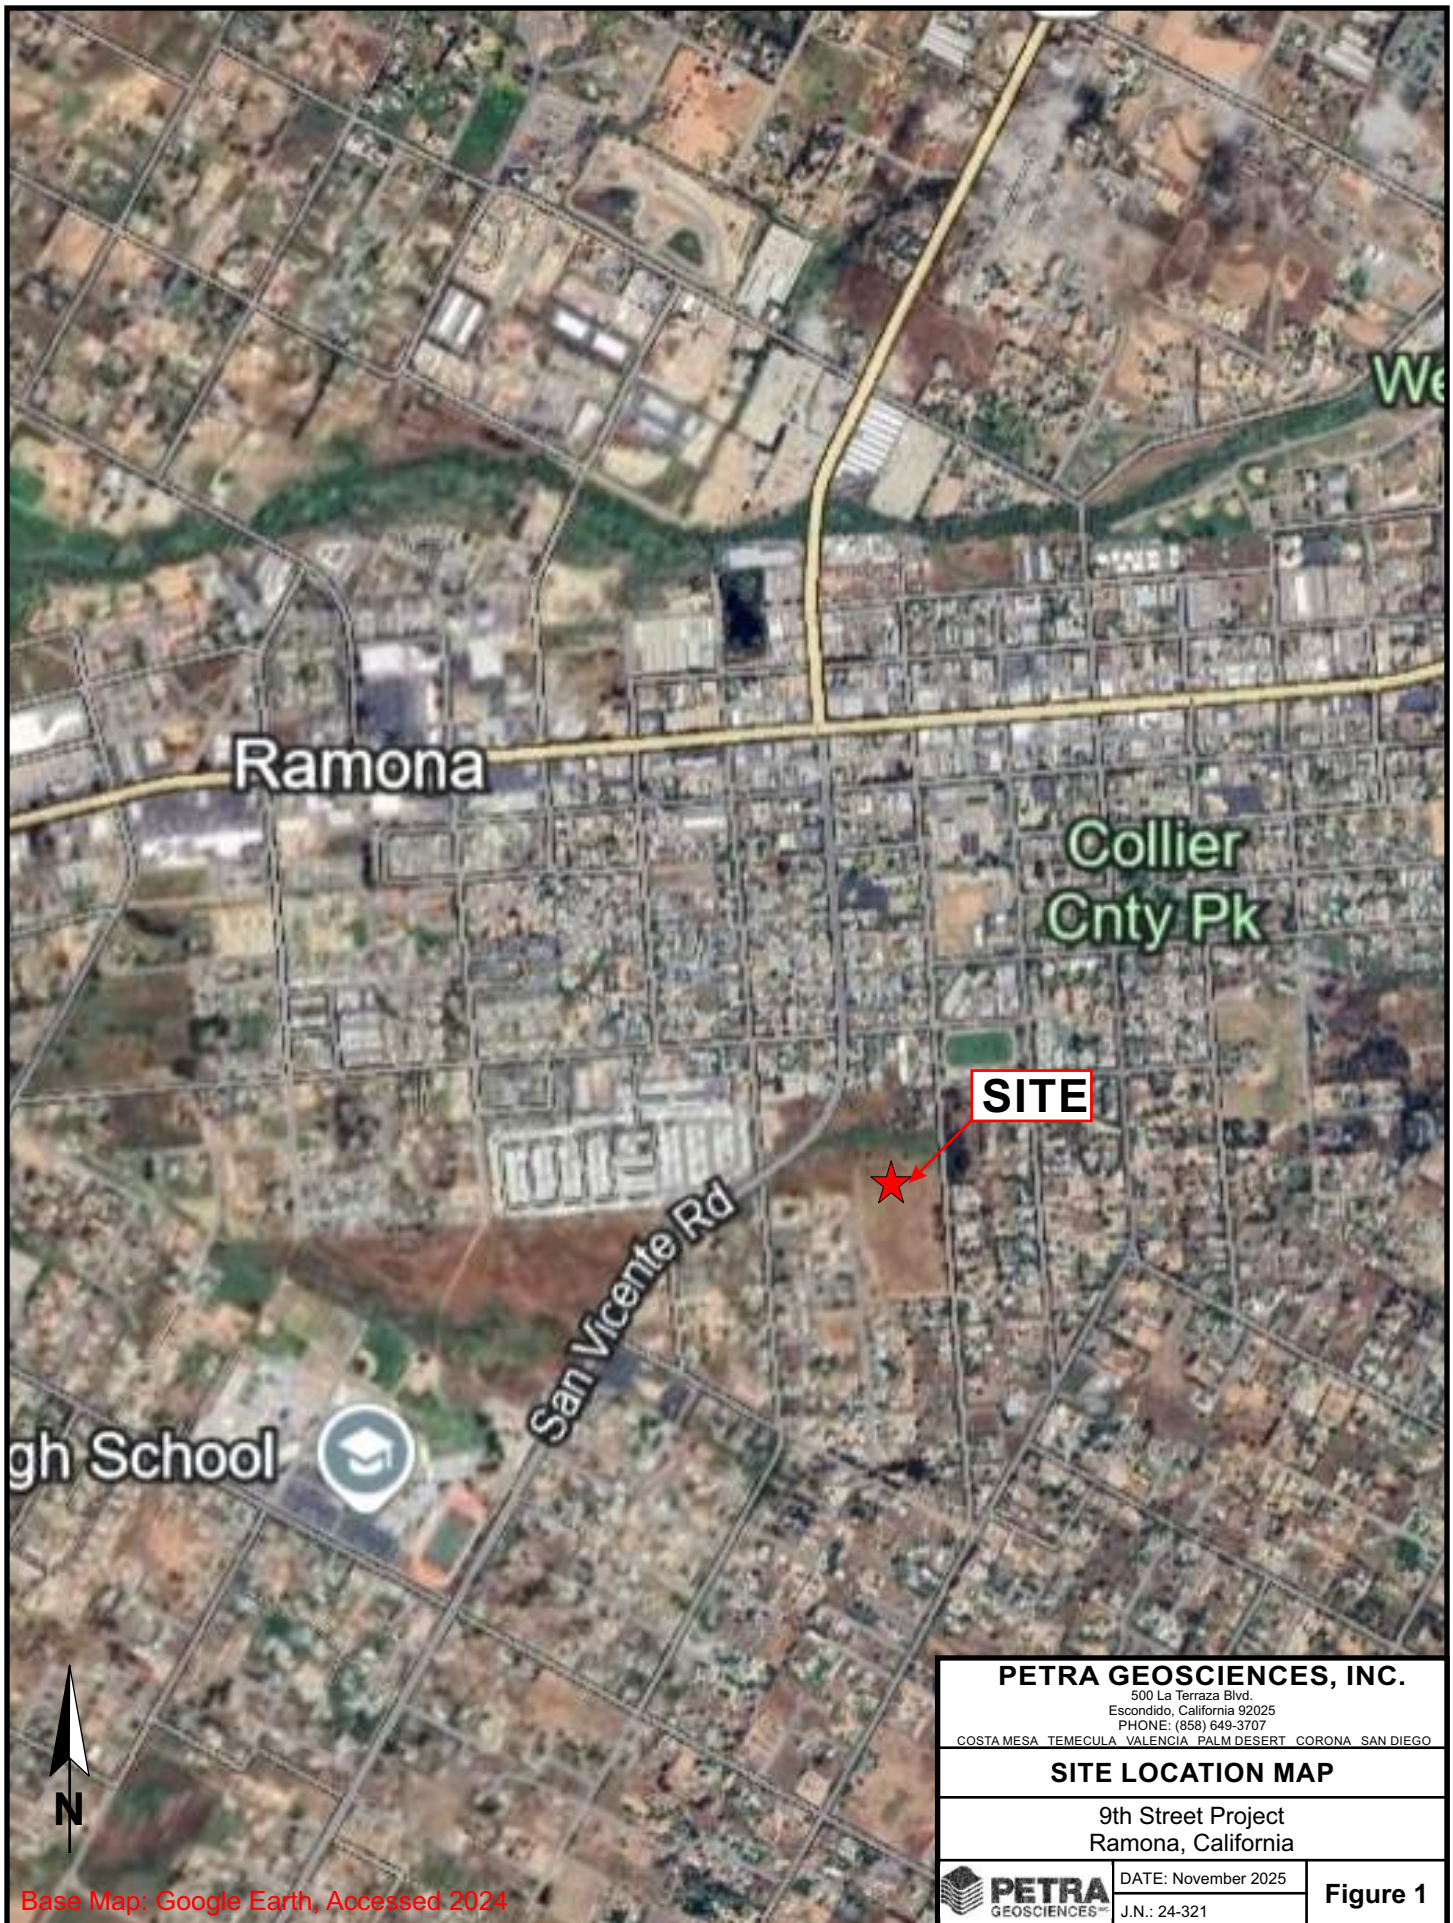

Base Map: Google Earth, Accessed 2024

PETRA GEOSCIENCES, INC.

500 La Terraza Blvd.
Escondido, California 92025
PHONE: (858) 649-3707

COSTA MESA TEMECULA VALENCIA PALM DESERT CORONA SAN DIEGO


SITE LOCATION MAP

9th Street Project
Ramona, California




DATE: November 2025
J.N.: 24-321

Figure 1

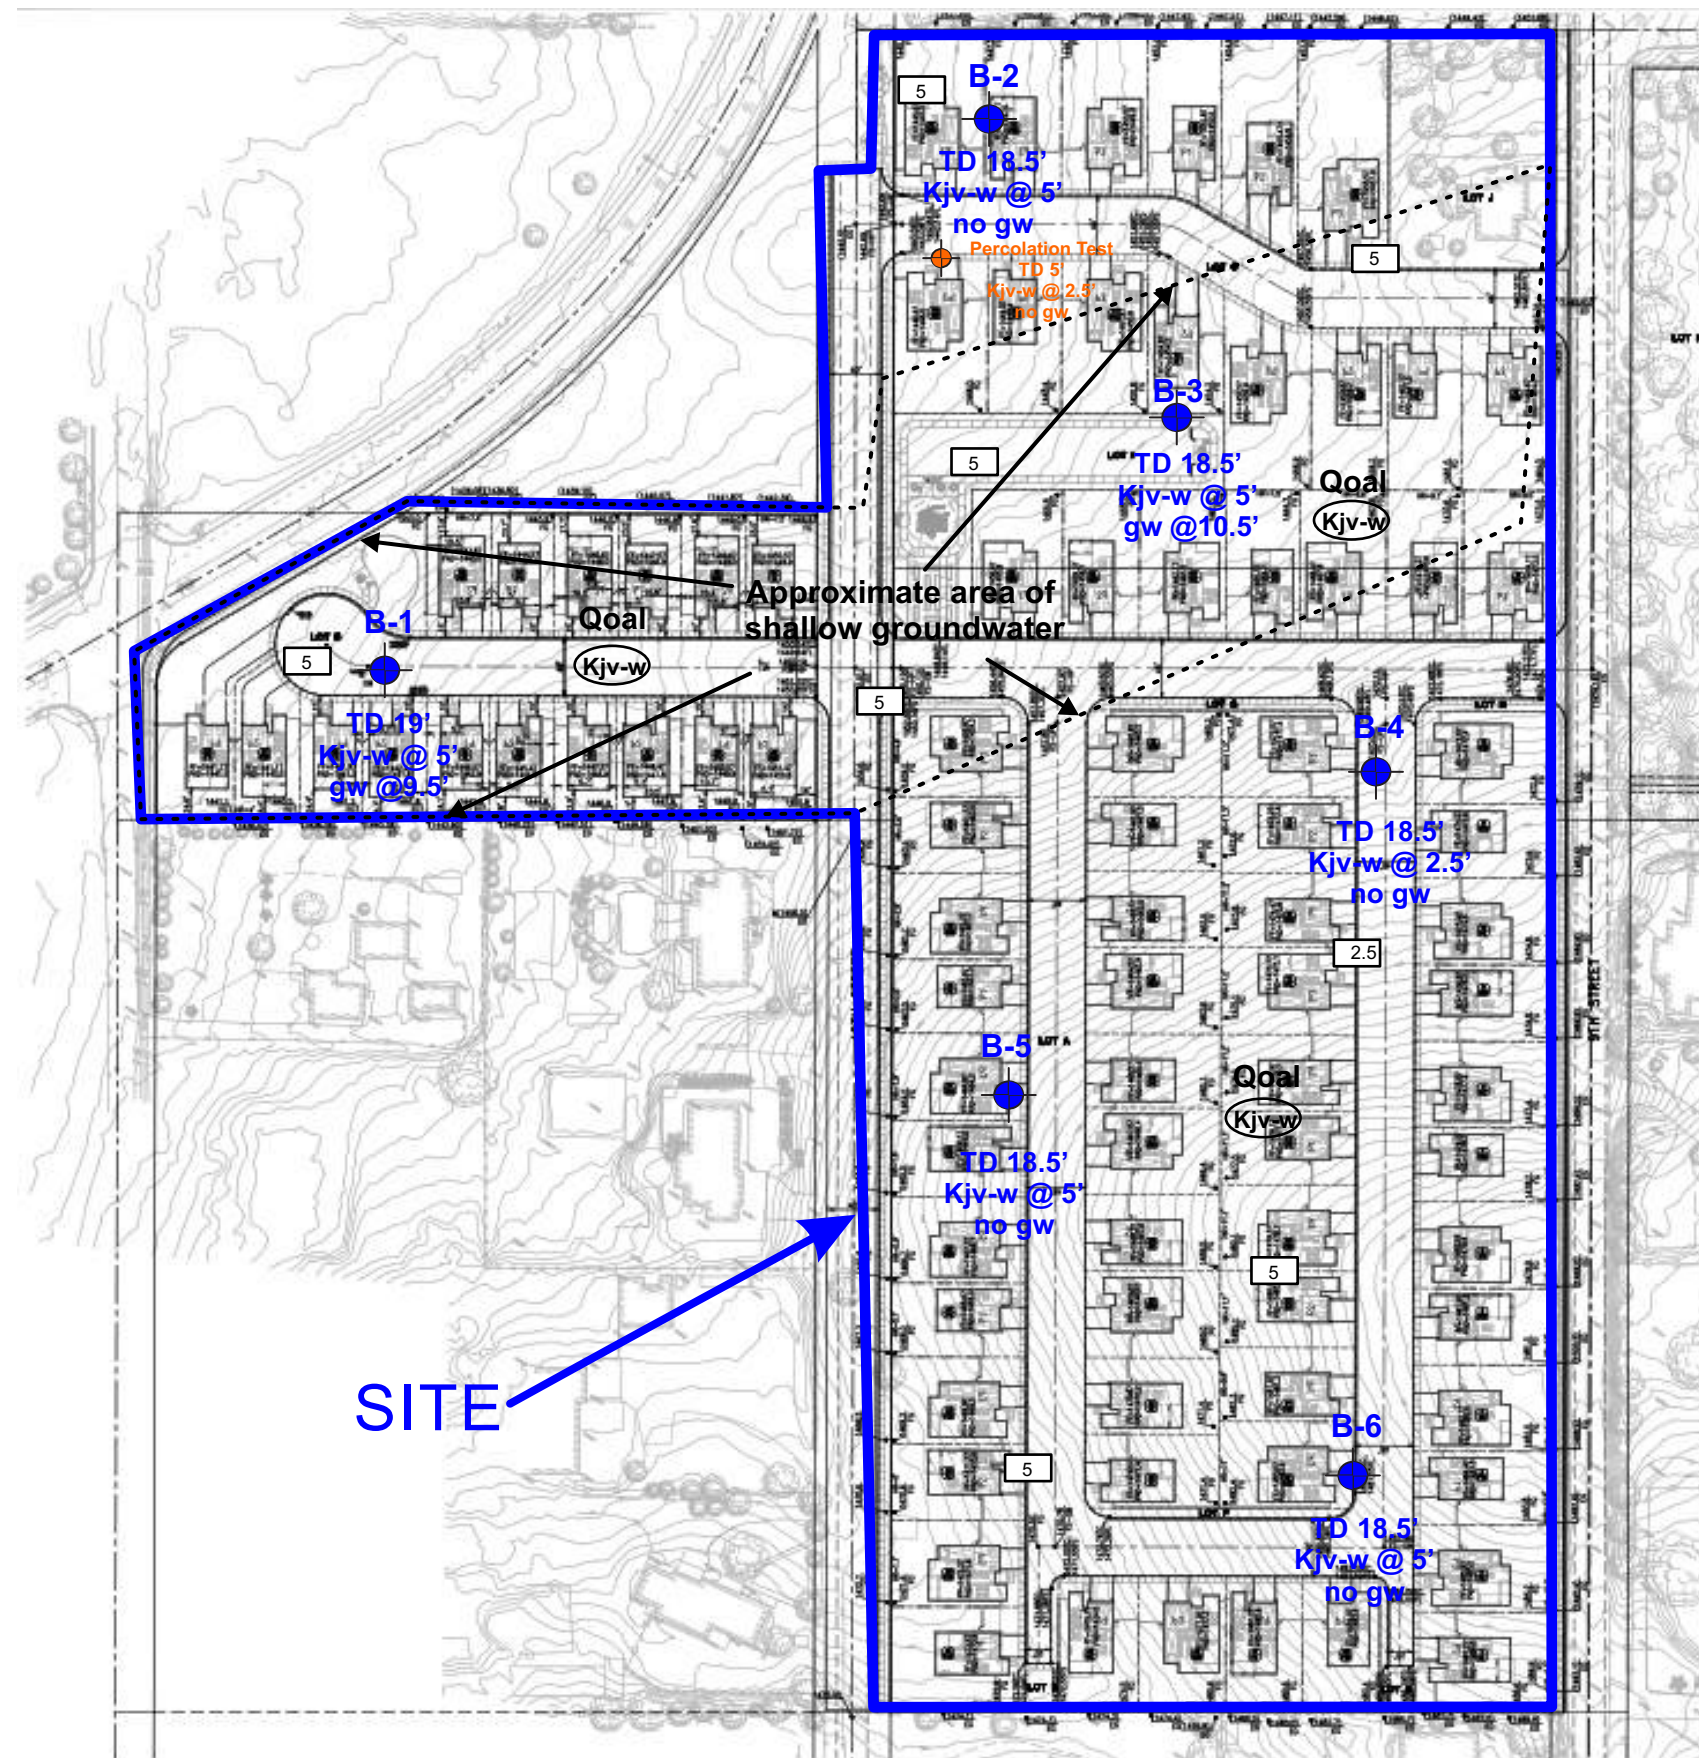

EXPLANATION	
Qoal	Quaternary Older Alluvium, Circled Where Buried
Kjv-w	Japantul Valley Tonalite (weathered), Circled Where Buried
B-6	Approximate Location of Geotechnical Boring, Showing Total Depth and Depth to Kjv-w
TD 19.5'	
Kjv-w @ 5'	
P-1	Approximate Location of Percolation Test Boring Showing Total Depth and Depth to Kjv-w
TD 5'	
Kjv-w @ 5'	
5	Estimated Depth of Remedial Removals

SITE



Not to Scale

Base Map Reference: C&V Consulting, Preliminary Grading Plan, Received November 20, 2025

PETRA GEOSCIENCES, INC. 500 La Terraza Blvd. Suite M Escondido, California 92025 PHONE: (858) 649-3707 COSTA MESA TEMECULA VALENCIA PALM DESERT CORONA SAN DIEGO	
BORING LOCATION MAP	
Warmington - Ramona 9th Street Project Ramona, California	
	DATE: November 2025 J.N.: 24-321
Figure 1	

APPENDIX A


EXPLORATION LOGS

Key to Soil and Bedrock Symbols and Terms



Unified Soil Classification System					
Coarse-grained Soils > 1/2 of materials is larger than #200 sieve	The No. 200 U.S. Standard Sieve is about the smallest particle visible to the naked eye	GRAVELS more than half of coarse fraction is larger than #4 sieve	Clean Gravels (less than 5% fines)	GW	Well-graded gravels, gravel-sand mixtures, little or no fines
			Gravels with fines	GP	Poorly-graded gravels, gravel-sand mixtures, little or no fines
		SANDS more than half of coarse fraction is smaller than #4 sieve	Clean Sands (less than 5% fines)	GM	Silty Gravels, poorly-graded gravel-sand-silt mixtures
			Sands with fines	GC	Clayey Gravels, poorly-graded gravel-sand-clay mixtures
Fine-grained Soils > 1/2 of materials is smaller than #200 sieve		SILTS & CLAYS Liquid Limit Less Than 50	SW	Well-graded sands, gravelly sands, little or no fines	
			SP	Poorly-graded sands, gravelly sands, little or no fines	
			SM	Silty Sands, poorly-graded sand-gravel-silt mixtures	
			SC	Clayey Sands, poorly-graded sand-gravel-clay mixtures	
		SILTS & CLAYS Liquid Limit Greater Than 50	ML	Inorganic silts & very fine sands, silty or clayey fine sands, clayey silts with slight plasticity	
			CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays	
	OL		Organic silts & clays of low plasticity		
	MH		Inorganic silts, micaceous or diatomaceous fine sand or silt		
Highly Organic Soils	CH	Inorganic clays of high plasticity, fat clays			
	OH	Organic silts and clays of medium-to-high plasticity			
		PT	Peat, humus swamp soils with high organic content		

Grain Size			
Description	Sieve Size	Grain Size	Approximate Size
Boulders	>12"	>12"	Larger than basketball-sized
Cobbles	3 - 12"	3 - 12"	Fist-sized to basketball-sized
Gravel	coarse 3/4 - 3"	3/4 - 3"	Thumb-sized to fist-sized
	fine #4 - 3/4"	0.19 - 0.75"	Pea-sized to thumb-sized
Sand	coarse #10 - #4	0.079 - 0.19"	Rock salt-sized to pea-sized
	medium #40 - #10	0.017 - 0.079"	Sugar-sized to rock salt-sized
	fine #200 - #40	0.0029 - 0.017"	Flour-sized to sugar-sized to
Fines	Passing #200	<0.0029"	Flour-sized and smaller



Laboratory Test Abbreviations			
MAX	Maximum Dry Density	MA	Mechanical (Particle Size) Analysis
EXP	Expansion Potential	AT	Atterberg Limits
SO4	Soluble Sulfate Content	#200	#200 Screen Wash
RES	Resistivity	DSU	Direct Shear (Undisturbed Sample)
pH	Acidity	DSR	Direct Shear (Remolded Sample)
CON	Consolidation	HYD	Hydrometer Analysis
SW	Swell	SE	Sand Equivalent
CL	Chloride Content	OC	Organic Content
RV	R-Value	COMP	Mortar Cylinder Compression

Modifiers	
Trace	< 1 %
Few	1 - 5 %
Some	5 - 12 %
Numerous	12 - 20 %

Sampler and Symbol Descriptions	
	Approximate Depth of Seepage
	Approximate Depth of Standing Groundwater
	Modified California Split Spoon Sample
	Standard Penetration Test
	Bulk Sample
	Shelby Tube
	No Recovery in Sampler

Bedrock Hardness	
Soft	Can be crushed and granulated by hand; "soil like" and structureless
Moderately Hard	Can be grooved with fingernails; gouged easily with butter knife; crumbles under light hammer blows
Hard	Cannot break by hand; can be grooved with a sharp knife; breaks with a moderate hammer blow
Very Hard	Sharp knife leaves scratch; chips with repeated hammer blows

Notes:

Blows Per Foot: Number of blows required to advance sampler 1 foot (unless a lesser distance is specified). Samplers in general were driven into the soil or bedrock at the bottom of the hole with a standard (140 lb.) hammer dropping a standard 30 inches unless noted otherwise in Log Notes. Drive samples collected in bucket auger borings may be obtained by dropping non-standard weight from variable heights. When a SPT sampler is used the blow count conforms to ASTM D-1586

EXPLORATION LOG

Project: Ramona 10th Street Project			Boring No.: B-1					
Location: Ramona			Elevation: 1442±					
Job No.: 24-321		Client: Warmington Residential	Date: 9/19/24					
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"	Logged By: SS					
Depth (Feet)	Lith- ology	Material Description	W A T E R	Samples		Laboratory Tests		
				Blows per 6 in.	C o r e B u l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Brown to dark brown, dry, loose, fine- to coarse-grained, trace gravel.						
		ALLUVIUM (Qal) <u>Clayey Sand (SC)</u> : Brown to pale yellow, slightly moist to moist, medium dense, fine- to coarse-grained.		8 10 16		10.8	117.0	MAX, EI, CORR
5		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) <u>Weathered Bedrock</u> : Olive gray to brown, slightly moist, soft to moderately hard, highly weathered, weak cementation.		9 15 15		11.4	124.3	
		moist.		50/6"		9.0	118.3	
10		@9.5' Perched groundwater. wet.		32 42 48		6.0		
15				15 22 50/5"		11.7		
		moderately hard.		27 50/5"		12.9		
20		Total Depth = 19' Groundwater encountered at 9.5' during drilling Boring backfilled with cuttings.						
25								
30								

PLATE A-1

EXPLORATION LOG

Project: Ramona 10th Street Project			Boring No.: B-2						
Location: Ramona			Elevation: 1438±						
Job No.: 24-321		Client: Warmington Residential		Date: 9/19/24					
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"		Logged By: SS					
Depth (Feet)	Lith- ology	Material Description	W A T E R	Samples			Laboratory Tests		
				Blows per 6 in.	C o r e	B u l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Light brown to brown, dry, loose, fine- to coarse-grained, trace gravel.							
		ALLUVIUM (Qal) <u>Clayey Sand (SC)</u> : Brown to dark brown, slightly moist, very stiff, fine- to coarse-grained, low plasticity.		7 9 24			11.1	125.9	
5		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) <u>Weathered Bedrock</u> : Brown to pale red, slightly moist, soft to moderately hard, highly weathered, weak cementation.		40 43 45			5.4	130.0	
		Brown to pale yellow.		45 50/6"			5.8		
10		slightly moist to moist, moderately hard.		50/6"			6.1		
15				50/5"			4.1		
		moist.		50/4"			5.1		
20		Total Depth = 18.5' No groundwater encountered during drilling Boring backfilled with cuttings.							
25									
30									

PLATE A-2

EXPLORATION LOG

Project: Ramona 10th Street Project				Boring No.: B-3					
Location: Ramona				Elevation: 1452±					
Job No.: 24-321		Client: Warmington Residential		Date: 9/19/24					
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"		Logged By: SS					
Depth (Feet)	Lith- ology	Material Description	W A T E R	Samples			Laboratory Tests		
				Blows per 6 in.	C o r e	B u l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Light brown, dry, loose, fine- to coarse-grained, trace clay.							
		ALLUVIUM (Qal) <u>Sandy Clay (CL)</u> : Brown to olive, slightly moist to moist, very stiff, fine- to coarse-grained.		8 10 21			12.0 19.0	109.0	
5		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) <u>Weathered Bedrock</u> : Gray to olive brown, slightly moist to moist, soft to moderately hard, highly weathered, weak cementaion.		15 20 24			81.0		
		moist.		14 15 17			7.7		
10		very moist. @10.5' Groundwater stabalized after drilling.		28 15 17			9.5		
15		wet.		22 7 35			11.3		
		very moist.		50/4"			17.9		
20		Total Depth = 18.5' Groundwater encountered at 10.5' during drilling Boring backfilled with cuttings.							
25									
30									

PLATE A-3

EXPLORATION LOG

Project: Ramona 10th Street Project				Boring No.: B-4					
Location: Ramona				Elevation: 1473±					
Job No.: 24-321		Client: Warmington Residential		Date: 9/19/24					
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"		Logged By: SS					
Depth (Feet)	Lith- ology	Material Description	W A T E R	Samples			Laboratory Tests		
				Blows per 6 in.	C o r e	B u l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Brown to dark brown, dry, loose, fine- to coarse-grained, trace gravel, trace clay.							
		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) <u>Weathered Bedrock</u> : Brown to pale yellow, dry to slightly moist, soft to moderately hard, highly weathered, weak cementation.		21 24 26			6.9	124.5	
5				18 28 28			9.7	127.1	
				15 50/4"			32.4		
10		slightly moist.		20 50/4"			5.4		
									
									
15		slightly moist to moist, moderately hard.		50/5"			2.8		
									
				50/2"			2.5		
20		Total Depth = 18.5' No groundwater encountered during drilling Boring backfilled with cuttings.							
									
									
25									
									
									
30									

PLATE A-4

EXPLORATION LOG

Project: Ramona 10th Street Project				Boring No.: B-5					
Location: Ramona				Elevation: 1477±					
Job No.: 24-321		Client: Warmington Residential		Date: 9/19/24					
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"		Logged By: SS					
Depth (Feet)	Lith- ology	Material Description	W A T E R	Samples			Laboratory Tests		
				Blows per 6 in.	C o r e	B u i l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Light brown, dry, loose, fine- to coarse-grained, trace gravel.							
		ALLUVIUM (Qal) <u>Sandy Silt with Clay (ML)</u> : Red to brown, slightly moist, soft, fine- to medium-grained.		5 3 3			8.7	107.7	
5		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) <u>Weathered Bedrock</u> : Brown to pale yellow, dry to slightly moist, soft to moderately hard, highly weathered, weak cementation.		21 25 29			4.4	130.0	
				45 50/3"			5.3		
10		Gray to light brown.		40 50/4"			3.0		
15		moderately hard.		50/4"			3.2		
				50/4"			3.8		
20		Total Depth = 18.5' No groundwater encountered during drilling Boring backfilled with cuttings.							
25									
30									

PLATE A-5

EXPLORATION LOG


Project: Ramona 10th Street Project				Boring No.: B-6					
Location: Ramona				Elevation: 1496±					
Job No.: 24-321		Client: Warmington Residential		Date: 9/19/24					
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"		Logged By: SS					
Depth (Feet)	Lith-ology	Material Description	W A T E R	Samples			Laboratory Tests		
				Blows per 6 in.	C o r e	B u l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Light brown, dry, loose, fine- to coarse-grained, trace gravel.							
		ALLUVIUM (Qal) <u>Sandy Silt with Clay (ML)</u> : Reddish-brown, slightly moist, stiff, fine- to coarse-grained.		5 12 15			3.9 5.4	110.8	EI, CORR
5		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) <u>Weathered Bedrock</u> : Light brown to pale olive, slightly moist, soft to moderately hard, highly weathered, weak cementation.		15 22 24			4.3	129.6	
				35 35 50/4"			3.5		
10				20 27 27			3.6		
15		Light brown to gray, moderately hard.		50/5"			2.8		
				50/3"			2.8		
20		Total Depth = 18.5' No groundwater encountered during drilling Boring backfilled with cuttings.							
25									
30									

PLATE A-6

EXPLORATION LOG

Project: Ramona 10th Street Project				Boring No.: P-1				
Location: Ramona				Elevation: 1441±				
Job No.: 24-321		Client: Warmington Residential		Date: 9/19/24				
Drill Method: 8" Hollow Stem Auger		Driving Weight: 140 lbs / 30"		Logged By: SS				
Depth (Feet)	Lith- ology	Material Description	W A T E R	Samples		Laboratory Tests		
				Blows per 6 in.	C o r e B u l k	Moisture Content (%)	Dry Density (pcf)	Other Lab Tests
0		TOPSOIL <u>Silty Sand (SM)</u> : Light brown to brown, dry, loose, fine- to coarse-grained, trace gravel.		43		5.1	128.3	#200
		BEDROCK - Japatul Valley Tonalite - Weathered (Kjv-w) Weathered Bedrock: Brown to pale red, dry to slightly moist, soft to moderately hard, highly weathered, weak cementation. slightly moist to moist.		15				
				15				
5		Total Depth = 5' No groundwater encountered during drilling Percolation well P-1 installed.						
10								
15								
20								
25								
30								

PLATE A-7

APPENDIX B

LABORATORY TEST PROCEDURES

LABORATORY DATA SUMMARY

LABORATORY TEST PROCEDURES

Soil Classification

Soils encountered within the exploratory borings were initially classified in the field in general accordance with the visual-manual procedures of the Unified Soil Classification System (ASTM D 2488). The samples were re-examined in the laboratory and the classifications reviewed and then revised where appropriate. The assigned group symbols are presented in the Boring Logs (Appendix A).

In-Situ Moisture and Density

Moisture content and unit dry density of in-place soils were determined in representative strata. Test data are summarized in the Boring Logs (Appendix A).

Maximum Dry Density and Optimum Moisture Content

The maximum dry density and optimum moisture content of the on-site soils were determined for selected bulk samples in accordance with current version of ASTM D 1557. The results of these tests are presented on Plate B-1.

Expansion Index

The expansion index of onsite soils was determined per ASTM D 4829. The expansion index and expansion potential are presented in Plate B-1.

Corrosivity Tests

Chemical analyses were performed on a selected sample to determine concentrations of soluble sulfate and chloride, as well as pH and resistivity. These tests were performed in accordance with California Test Method Nos. 417 (sulfate), 422 (chloride) and 643 (pH and resistivity). Test results are presented in Plate B-1.

LABORATORY DATA SUMMARY

Laboratory Maximum Dry Density

Sample Location	Soil Type	Optimum Moisture (%)	Maximum Dry Density (pcf)
B-1 @ 0 – 5'	Dark Brown, Silty fine- to coarse-grained SAND with gravel (rock corrected)	7.0	134.5
B-5 @ 0 – 5'	Dark Brown, Silty fine to coarse grained SAND with clay	10.0	127.0

PER ASTM D 1557 & ASTM D 4718-15

Corrosivity

Sample Location	Sulfate¹ (%)	Chloride² (ppm)	pH³	Resistivity³ (ohm-cm)
B-1 @ 0 – 5'	0.0039	262.5	7.07	6,200
B-3 @ 0 – 5'	0.0108	275.0	6.92	2,400

(1) PER CALIFORNIA TEST METHOD NO. 417

(2) PER CALIFORNIA TEST METHOD NO. 422

(3) PER CALIFORNIA TEST METHOD NO. 643

Expansion Index

Sample Location Depth (feet)	Soil Type	Expansion¹ Index	Expansion Potential
B-1 @ 0 – 5'	Dark Brown, Silty fine- to coarse-grained SAND with gravel	0	Very Low
B-6 @ 0 – 5'	Brown, Silty fine- to coarse-grained SAND	4	Very Low

(1) PER ASTM D 4829


APPENDIX C

SEISMIC DESIGN PARAMETERS



24-321 Warmington Ramona

Latitude, Longitude: 33.03541783, -116.86274690

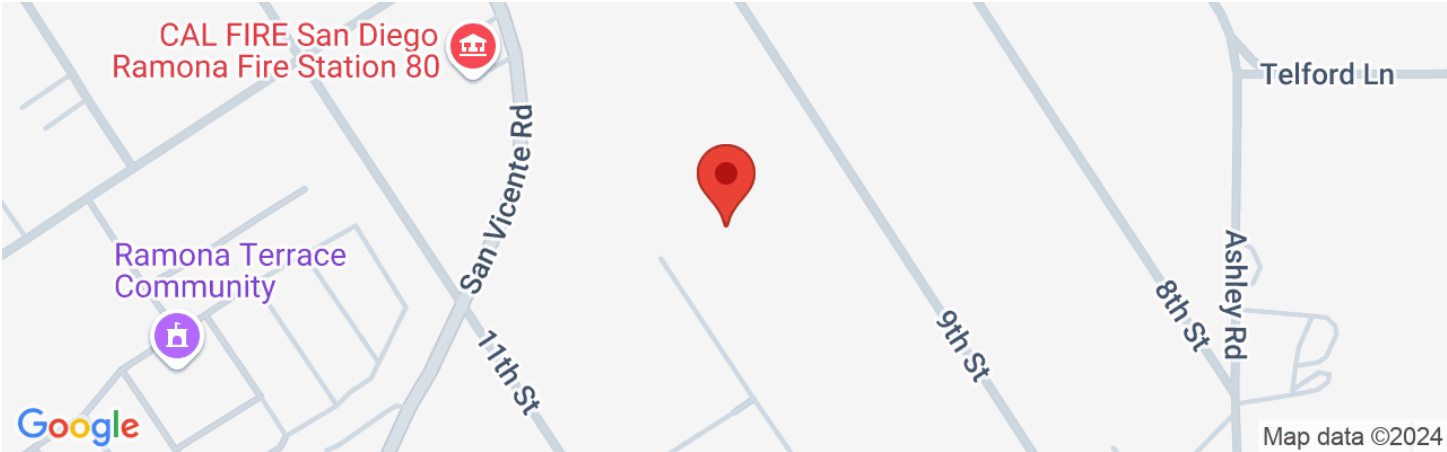

Date	10/7/2024, 5:27:06 PM
Design Code Reference Document	ASCE7-16
Risk Category	II
Site Class	B - Estimated (see Section 11.4.3)

Type	Value	Description
S _S	0.928	MCE _R ground motion. (for 0.2 second period)
S ₁	0.331	MCE _R ground motion. (for 1.0s period)
S _{MS}	0.928	Site-modified spectral acceleration value
S _{M1}	0.331	Site-modified spectral acceleration value
S _{DS}	0.619	Numeric seismic design value at 0.2 second SA
S _{D1}	0.221	Numeric seismic design value at 1.0 second SA

Type	Value	Description
SDC	D	Seismic design category
F _a	1	Site amplification factor at 0.2 second
F _v	1	Site amplification factor at 1.0 second
PGA	0.402	MCE _G peak ground acceleration
F _{PGA}	1	Site amplification factor at PGA
PGA _M	0.402	Site modified peak ground acceleration
T _L	8	Long-period transition period in seconds
SsRT	0.928	Probabilistic risk-targeted ground motion. (0.2 second)

Type	Value	Description
SsUH	1.008	Factored uniform-hazard (2% probability of exceedance in 50 years) spectral acceleration
SsD	1.5	Factored deterministic acceleration value. (0.2 second)
S1RT	0.331	Probabilistic risk-targeted ground motion. (1.0 second)
S1UH	0.359	Factored uniform-hazard (2% probability of exceedance in 50 years) spectral acceleration.
S1D	0.6	Factored deterministic acceleration value. (1.0 second)
PGAd	0.5	Factored deterministic acceleration value. (Peak Ground Acceleration)
PGA _{UH}	0.402	Uniform-hazard (2% probability of exceedance in 50 years) Peak Ground Acceleration
C _{RS}	0.921	Mapped value of the risk coefficient at short periods
C _{R1}	0.924	Mapped value of the risk coefficient at a period of 1 s
C _V	0.9	Vertical coefficient

DISCLAIMER

While the information presented on this website is believed to be correct, SEAOC / OSHPD and its sponsors and contributors assume no responsibility or liability for its accuracy. The material presented in this web application should not be used or relied upon for any specific application without competent examination and verification of its accuracy, suitability and applicability by engineers or other licensed professionals. SEAOC / OSHPD do not intend that the use of this information replace the sound judgment of such competent professionals, having experience and knowledge in the field of practice, nor to substitute for the standard of care required of such professionals in interpreting and applying the results of the seismic data provided by this website. Users of the information from this website assume all liability arising from such use. Use of the output of this website does not imply approval by the governing building code bodies responsible for building code approval and interpretation for the building site described by latitude/longitude location in the search results of this website.

APPENDIX D

PERCOLATION TEST DATA

Boring/Test Number: P-1

Total Depth of Boring, D_T (ft):	5	Test Date:	9/20/2024
Diameter of Hole, D (in):	8	Tested By:	SS
Diameter of Casing, d (in):	3	USCS Soil Type:	Kgr
Depth of Slotted Casing (ft):	0-5	Depth to Groundwater (ft):	NA
Porosity of Annulus Material, n :	0.44	Ground Elevation (msl ft):	NA
Depth from Existing Ground Surface to Bottom of Prop. Infiltration System (ft):		/	


SANDY SOIL CRITERIA TEST

Trial No.	Time Interval Δt (min.)	Depth to Water, D_w		Change in Water Level ΔD (in.)	Change in Height of Water Greater Than or Equal to 6"? (Yes/No)*
		Initial, D_o (ft.)	Final, D_f (ft.)		
1	25	2.40	2.46	0.72	no
2	25	2.40	2.46	0.72	no

Standard Time Interval Between Readings (min.), [* if yes = 10, if no = 30]: 30

PERCOLATION TEST

Trial No.	Time Interval Δt (min.)	Depth to Water, D_w		Change in Water Level ΔH (in.)	Percolation Rate	
		Initial, D_o (ft.)	Final, D_f (ft.)		(min/in.)	(gal/day/ft ²)
1	30	2.40	2.48	0.96	31.25	0.91
2	30	2.40	2.47	0.84	35.71	0.80
3	30	2.40	2.49	1.08	27.78	1.03
4	30	2.40	2.48	0.96	31.25	0.91
5	30	2.40	2.47	0.84	35.71	0.80
6	30	2.40	2.47	0.84	35.71	0.80
7	30	2.40	2.45	0.60	50.00	0.57
8	30	2.40	2.47	0.84	35.71	0.80
9	30	2.40	2.47	0.84	35.71	0.80
10	30	2.40	2.47	0.84	35.71	0.80
11	30	2.40	2.48	0.96	31.25	0.91
12	30	2.40	2.47	0.84	35.71	0.80

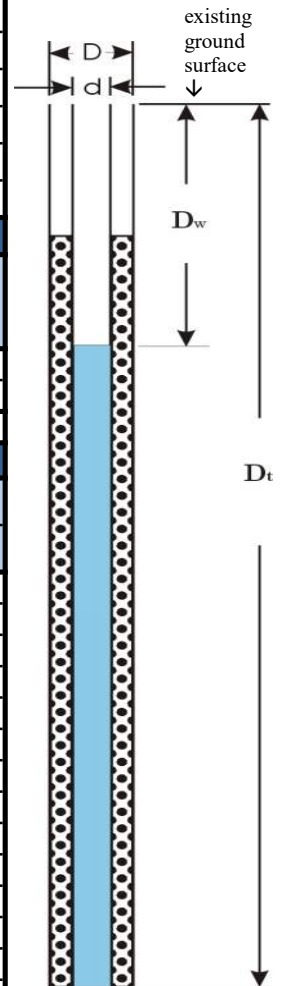

TEST RESULTS**

Infiltration Rate [Porchet Method] [#] (inches/hour)	Percolation Rate	
	(min/in.)	(gal/day/ft ²)
0.07	35.71	0.80

**Raw Results. Does Not Include a Factor of Safety

FACTOR OF SAFETY WORKSHEET

Factor Category ^Φ	Factor Description	Assigned Weight (w)	Factor Value (v)	Product (p) $p = (w) \times (v)$
A	Suitability Assessment			
	Soil Assessment Methods	0.25	2	0.5
	Predominant Soil Texture	0.25	1	0.25
	Site Soil Variability	0.25	1	0.25
	Depth to Groundwater / Impervious Layer	0.25	1	0.25
Suitability Assessment Safety Factor, $S_A = \Sigma p$				1.25

^Φ Factor Category B Should Be Provided and Calculated by Project Civil Engineer

[#] Where Infiltration Rate, $I_t = \Delta H (60r) / \Delta t (r + 2H_{avg})$

$$r = D / 2$$

$$H_o = D_T - D_o$$

$$H_f = D_T - D_f$$

$$\Delta H = \Delta D = H_o - H_f$$

$$H_{avg} = (H_o + H_f) / 2$$

Reference:

SARWQCB, Technical Guidance Document Appendix VII, dated December 20, 2013

PETRA GEOSCIENCES, INC.

3186 Airway Avenue, Suite K
Costa Mesa, California 92626
PHONE: (714) 549-8921

COSTA MESA TEMECULA LOS ANGELES PALM DESERT CORONA ESCONDIDO

PERCOLATION TEST SUMMARY

9th Street Project
Ramona, California



DATE: Oct. 2024
J.N.: 24-321

Appendix
D

Table D.1-1: Considerations for Geotechnical Analysis of Infiltration Restrictions

Restriction Element		Is Element Applicable? (Yes/No)
Mandatory Considerations	BMP is within 100' of Contaminated Soils	No
	BMP is within 100' of Industrial Activities Lacking Source Control	No
	BMP is within 100' of Well/Groundwater Basin	No
	BMP is within 50' of Septic Tanks/Leach Fields	No
	BMP is within 10' of Structures/Tanks/Walls	No
	BMP is within 10' of Sewer Utilities	No
	BMP is within 10' of Groundwater Table	Yes
	BMP is within Hydric Soils	Yes
	BMP is within Highly Liquefiable Soils and has Connectivity to Structures	No
	BMP is within 1.5 Times the Height of Adjacent Steep Slopes ($\geq 25\%$)	No
	County Staff has Assigned "Restricted" Infiltration Category	Yes
Optional Considerations	BMP is within Predominantly Type D Soil	Yes
	BMP is within 10' of Property Line	No
	BMP is within Fill Depths of $\geq 5'$ (Existing or Proposed)	No
	BMP is within 10' of Underground Utilities	No
	BMP is within 250' of Ephemeral Stream	No
	Other (Provide detailed geotechnical support)	Yes
Result	Based on examination of the best available information, I have <u>not identified any restrictions</u> above.	☐ Unrestricted
	Based on examination of the best available information, I have <u>identified one or more restrictions</u> above.	x Restricted

Categorization of Infiltration Feasibility Condition		Form I-8	
Part 1 - Full Infiltration Feasibility Screening Criteria Would infiltration of the full design volume be feasible from a physical perspective without any undesirable consequences that cannot be reasonably mitigated?			
Criteria	Screening Question	Yes	No
1	Is the estimated reliable infiltration rate below proposed facility locations greater than 0.5 inches per hour? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.2 and Appendix D.		No
Provide basis: The site will be graded such that compacted fill will cover the majority of the area and underlain by relatively impermeable granitic bedrock. The compacted fill and granitic bedrock possess little void space and therefore the infiltration rate is considered to be less than 0.5 inches per hour. Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability.			
2	Can infiltration greater than 0.5 inches per hour be allowed without increasing risk of geotechnical hazards (slope stability, groundwater mounding, utilities, or other factors) that cannot be mitigated to an acceptable level? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.2.		No
Provide basis: The site will be graded such that compacted fill will cover the majority of the area and underlain by relatively impermeable granitic bedrock. The compacted fill and granitic bedrock possess little void space. Areas at the site could not be designed for infiltration without increasing risk of geotechnical hazards. Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability.			

Form I-8 Page 2 of 4

Criteria	Screening Question	Yes	No
3	Can infiltration greater than 0.5 inches per hour be allowed without increasing risk of groundwater contamination (shallow water table, storm water pollutants or other factors) that cannot be mitigated to an acceptable level? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.3.		No
Provide basis: Based on Appendix C.3 screening, the site is not known to be in an area of groundwater contamination and/or soil pollution. Groundwater is present in portions of the site within 9.5 feet below existing ground surface. Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability.			
4	Can infiltration greater than 0.5 inches per hour be allowed without causing potential water balance issues such as change of seasonality of ephemeral streams or increased discharge of contaminated groundwater to surface waters? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.3.		No
Provide basis: Based on Appendix C.3 screening, the site is not known to be in an area of groundwater contamination and/or soil pollution. Groundwater is present in portions of the site within 9.5 feet below existing ground surface and may possess potential water balance issues. Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability.			
Part 1 Result *	If all answers to rows 1 - 4 are “Yes” a full infiltration design is potentially feasible. The feasibility screening category is Full Infiltration If any answer from row 1-4 is “No”, infiltration may be possible to some extent but would not generally be feasible or desirable to achieve a “full infiltration” design. Proceed to Part 2		No

*To be completed using gathered site information and best professional judgment considering the definition of MEP in the MS4 Permit. Additional testing and/or studies may be required by Agency/Jurisdictions to substantiate findings

Form I-8 Page 3 of 4

Part 2 – Partial Infiltration vs. No Infiltration Feasibility Screening Criteria

Would infiltration of water in any appreciable amount be physically feasible without any negative consequences that cannot be reasonably mitigated?

Criteria	Screening Question	Yes	No
5	Do soil and geologic conditions allow for infiltration in any appreciable rate or volume? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.2 and Appendix D.		No

Provide basis:

The site will be graded such that compacted fill will cover the majority of the area as well as be underlain by relatively impermeable granitic bedrock. The compacted fill and granitic bedrock possess little void space. Areas at the site could be designed for infiltration rates less than 0.5 inches per hour.

Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability and why it was not feasible to mitigate low infiltration rates.

6	Can Infiltration in any appreciable quantity be allowed without increasing risk of geotechnical hazards (slope stability, groundwater mounding, utilities, or other factors) that cannot be mitigated to an acceptable level? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.2.		No
---	---	--	----

Provide basis:

The site will be graded such that compacted fill will cover the majority of the area and underlain by relatively impermeable granitic bedrock. The compacted fill and granitic bedrock possess little void space. Areas at the site should not be designed for infiltration without increasing due to risk of geotechnical hazards.

Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability and why it was not feasible to mitigate low infiltration rates.

Form I-8 Page 4 of 4

Criteria	Screening Question	Yes	No
7	Can Infiltration in any appreciable quantity be allowed without posing significant risk for groundwater related concerns (shallow water table, storm water pollutants or other factors)? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.3.		No
Provide basis: Based on Appendix C.3 screening, the site is not known to be in an area of groundwater contamination and/or soil pollution. Shallow groundwater is present in portions of the site within 9.5 feet below existing ground surface. Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability and why it was not feasible to mitigate low infiltration rates.			
8	Can infiltration be allowed without violating downstream water rights? The response to this Screening Question shall be based on a comprehensive evaluation of the factors presented in Appendix C.3.	Yes	
Provide basis: Based on Appendix C.3 screening, the site is not known to be in an area which would impact downstream water rights. Summarize findings of studies; provide reference to studies, calculations, maps, data sources, etc. Provide narrative discussion of study/data source applicability and why it was not feasible to mitigate low infiltration rates.			
Part 2 Result*	If all answers from row 1-4 are yes then partial infiltration design is potentially feasible. The feasibility screening category is Partial Infiltration. If any answer from row 5-8 is no, then infiltration of any volume is considered to be infeasible within the drainage area. The feasibility screening category is No Infiltration.		No Infiltration

*To be completed using gathered site information and best professional judgment considering the definition of MEP in the MS4 Permit. Additional testing and/or studies may be required by Agency/Jurisdictions to substantiate findings

APPENDIX E

STANDARD GRADING SPECIFICATIONS

STANDARD GRADING SPECIFICATIONS

These specifications present the usual and minimum requirements for projects on which Petra Geosciences, Inc. (Petra) is the geotechnical consultant. No deviation from these specifications will be allowed, except where specifically superseded in the preliminary geology and soils report, or in other written communication signed by the Soils Engineer and Engineering Geologist of record (Geotechnical Consultant).

I. GENERAL

- A. The Geotechnical Consultant is the Owner's or Builder's representative on the project. For the purpose of these specifications, participation by the Geotechnical Consultant includes that observation performed by any person or persons employed by, and responsible to, the licensed Soils Engineer and Engineering Geologist signing the soils report.
- B. The contractor should prepare and submit to the Owner and Geotechnical Consultant a work plan that indicates the sequence of earthwork grading, the number of "spreads" and the estimated quantities of daily earthwork to be performed prior to the commencement of grading. This work plan should be reviewed by the Geotechnical Consultant to schedule personnel to perform the appropriate level of observation, mapping, and compaction testing as necessary.
- C. All clearing, site preparation, or earthwork performed on the project shall be conducted by the Contractor in accordance with the recommendations presented in the geotechnical report and under the observation of the Geotechnical Consultant.
- D. It is the Contractor's responsibility to prepare the ground surface to receive the fills to the satisfaction of the Geotechnical Consultant and to place, spread, mix, water, and compact the fill in accordance with the specifications of the Geotechnical Consultant. The Contractor shall also remove all material considered unsatisfactory by the Geotechnical Consultant.
- E. It is the Contractor's responsibility to have suitable and sufficient compaction equipment on the job site to handle the amount of fill being placed. If necessary, excavation equipment will be shut down to permit completion of compaction to project specifications. Sufficient watering apparatus will also be provided by the Contractor, with due consideration for the fill material, rate of placement, and time of year.
- F. After completion of grading a report will be submitted by the Geotechnical Consultant.

II. SITE PREPARATION

- A. Clearing and Grubbing
 - 1. All vegetation such as trees, brush, grass, roots, and deleterious material shall be disposed of offsite. This removal shall be concluded prior to placing fill.
 - 2. Any underground structures such as cesspools, cisterns, mining shafts, tunnels, septic tanks, wells, pipe lines, etc., are to be removed or treated in a manner prescribed by the Geotechnical Consultant.

STANDARD GRADING SPECIFICATIONS

III. FILL AREA PREPARATION

A. Remedial Removals/Overexcavations

1. Remedial removals, as well as overexcavation for remedial purposes, shall be evaluated by the Geotechnical Consultant. Remedial removal depths presented in the geotechnical report and shown on the geotechnical plans are estimates only. The actual extent of removal should be determined by the Geotechnical Consultant based on the conditions exposed during grading. All soft, loose, dry, saturated, spongy, organic-rich, highly fractured or otherwise unsuitable ground shall be overexcavated to competent ground as determined by the Geotechnical Consultant.
2. Soil, alluvium, or bedrock materials determined by the Soils Engineer as being unsuitable for placement in compacted fills shall be removed from the site. Any material incorporated as a part of a compacted fill must be approved by the Geotechnical Consultant.
3. Should potentially hazardous materials be encountered, the Contractor should stop work in the affected area. An environmental consultant specializing in hazardous materials should be notified immediately for evaluation and handling of these materials prior to continuing work in the affected area.

B. Evaluation/Acceptance of Fill Areas

All areas to receive fill, including removal and processed areas, key bottoms, and benches, shall be observed, mapped, elevations recorded, and/or tested prior to being accepted by the Geotechnical Consultant as suitable to receive fill. The contractor shall obtain a written acceptance from the Geotechnical Consultant prior to fill placement. A licensed surveyor shall provide sufficient survey control for determining locations and elevations of processed areas, keys, and benches.

C. Processing

After the ground surface to receive fill has been declared satisfactory for support of fill by the Geotechnical Consultant, it shall be scarified to a minimum depth of 6 inches and until the ground surface is uniform and free from ruts, hollows, hummocks, or other uneven features which may prevent uniform compaction.

The scarified ground surface shall then be brought to optimum moisture, mixed as required, and compacted to a minimum relative compaction of 90 percent.

D. Subdrains

Subdrainage devices shall be constructed in compliance with the ordinances of the controlling governmental agency, and/or with the recommendations of the Geotechnical Consultant. (Typical Canyon Subdrain details are given on Plate SG-1).

E. Cut/Fill & Deep Fill/Shallow Fill Transitions

In order to provide uniform bearing conditions in cut/fill and deep fill/shallow fill transition lots, the cut and shallow fill portions of the lot should be overexcavated to the depths and the horizontal limits discussed in the approved geotechnical report and replaced with compacted fill. (Typical details are given on Plate SG-7.)

STANDARD GRADING SPECIFICATIONS

IV. COMPACTED FILL MATERIAL

A. General

Materials excavated on the property may be utilized in the fill, provided each material has been determined to be suitable by the Geotechnical Consultant. Material to be used for fill shall be essentially free of organic material and other deleterious substances. Roots, tree branches, and other matter missed during clearing shall be removed from the fill as recommended by the Geotechnical Consultant. Material that is spongy, subject to decay, or otherwise considered unsuitable shall not be used in the compacted fill.

Soils of poor quality, such as those with unacceptable gradation, high expansion potential, or low strength shall be placed in areas acceptable to the Geotechnical Consultant or mixed with other soils to achieve satisfactory fill material.

B. Oversize Materials

Oversize material defined as rock, or other irreducible material with a maximum dimension greater than 12 inches in diameter, shall be taken offsite or placed in accordance with the recommendations of the Geotechnical Consultant in areas designated as suitable for rock disposal (Typical details for Rock Disposal are given on Plate SG-4).

Rock fragments less than 12 inches in diameter may be utilized in the fill provided, they are not nested or placed in concentrated pockets; they are surrounded by compacted fine grained soil material and the distribution of rocks is approved by the Geotechnical Consultant.

C. Laboratory Testing

Representative samples of materials to be utilized as compacted fill shall be analyzed by the laboratory of the Geotechnical Consultant to determine their physical properties. If any material other than that previously tested is encountered during grading, the appropriate analysis of this material shall be conducted by the Geotechnical Consultant as soon as possible.

D. Import

If importing of fill material is required for grading, proposed import material should meet the requirements of the previous section. The import source shall be given to the Geotechnical Consultant at least 2 working days prior to importing so that appropriate tests can be performed and its suitability determined.

V. FILL PLACEMENT AND COMPACTION

A. Fill Layers

Material used in the compacting process shall be evenly spread, watered, processed, and compacted in thin lifts not to exceed 6 inches in thickness to obtain a uniformly dense layer. The fill shall be placed and compacted on a horizontal plane, unless otherwise approved by the Geotechnical Consultant.

STANDARD GRADING SPECIFICATIONS

B. Moisture Conditioning

Fill soils shall be watered, dried back, blended, and/or mixed, as necessary to attain a relatively uniform moisture content at or slightly above optimum moisture content.

C. Compaction

Each layer shall be compacted to 90 percent of the maximum density in compliance with the testing method specified by the controlling governmental agency. (In general, ASTM D 1557-02, will be used.)

If compaction to a lesser percentage is authorized by the controlling governmental agency because of a specific land use or expansive soils condition, the area to received fill compacted to less than 90 percent shall either be delineated on the grading plan or appropriate reference made to the area in the soils report.

D. Failing Areas

If the moisture content or relative density varies from that required by the Geotechnical Consultant, the Contractor shall rework the fill until it is approved by the Geotechnical Consultant.

E. Benching

All fills shall be keyed and benched through all topsoil, colluvium, alluvium or creep material, into sound bedrock or firm material where the slope receiving fill exceeds a ratio of 5 horizontal to 1 vertical, in accordance with the recommendations of the Geotechnical Consultant.

VI. SLOPES

A. Fill Slopes

The contractor will be required to obtain a minimum relative compaction of 90 percent out to the finish slope face of fill slopes, buttresses, and stabilization fills. This may be achieved by either overbuilding the slope and cutting back to the compacted core, or by direct compaction of the slope face with suitable equipment, or by any other procedure that produces the required compaction.

B. Side Hill Fills

The key for side hill fills shall be a minimum of 15 feet within bedrock or firm materials, unless otherwise specified in the soils report. (See detail on Plate SG-5.)

C. Fill-Over-Cut Slopes

Fill-over-cut slopes shall be properly keyed through topsoil, colluvium or creep material into rock or firm materials, and the transition shall be stripped of all soils prior to placing fill. (see detail on Plate SG-6).

STANDARD GRADING SPECIFICATIONS

D. Landscaping

All fill slopes should be planted or protected from erosion by other methods specified in the soils report.

E. Cut Slopes

1. The Geotechnical Consultant should observe all cut slopes at vertical intervals not exceeding 10 feet.
2. If any conditions not anticipated in the preliminary report such as perched water, seepage, lenticular or confined strata of a potentially adverse nature, unfavorably inclined bedding, joints or fault planes are encountered during grading, these conditions shall be evaluated by the Geotechnical Consultant, and recommendations shall be made to treat these problems (Typical details for stabilization of a portion of a cut slope are given in Plates SG-2 and SG-3.).
3. Cut slopes that face in the same direction as the prevailing drainage shall be protected from slope wash by a non-erodible interceptor swale placed at the top of the slope.
4. Unless otherwise specified in the soils and geological report, no cut slopes shall be excavated higher or steeper than that allowed by the ordinances of controlling governmental agencies.
5. Drainage terraces shall be constructed in compliance with the ordinances of controlling governmental agencies, or with the recommendations of the Geotechnical Consultant.

VII. GRADING OBSERVATION

A. General

All cleanouts, processed ground to receive fill, key excavations, subdrains, and rock disposals must be observed and approved by the Geotechnical Consultant prior to placing any fill. It shall be the Contractor's responsibility to notify the Geotechnical Consultant when such areas are ready.

B. Compaction Testing

Observation of the fill placement shall be provided by the Geotechnical Consultant during the progress of grading. Location and frequency of tests shall be at the Consultants discretion based on field conditions encountered. Compaction test locations will not necessarily be selected on a random basis. Test locations may be selected to verify adequacy of compaction levels in areas that are judged to be susceptible to inadequate compaction.

C. Frequency of Compaction Testing



In general, density tests should be made at intervals not exceeding 2 feet of fill height or every 1000 cubic yards of fill placed. This criteria will vary depending on soil conditions and the size of the job. In any event, an adequate number of field density tests shall be made to verify that the required compaction is being achieved.

STANDARD GRADING SPECIFICATIONS

VIII. CONSTRUCTION CONSIDERATIONS

- A. Erosion control measures, when necessary, shall be provided by the Contractor during grading and prior to the completion and construction of permanent drainage controls.
- B. Upon completion of grading and termination of observations by the Geotechnical Consultant, no further filling or excavating, including that necessary for footings, foundations, large tree wells, retaining walls, or other features shall be performed without the approval of the Geotechnical Consultant.
- C. Care shall be taken by the Contractor during final grading to preserve any berms, drainage terraces, interceptor swales, or other devices of permanent nature on or adjacent to the property.


S:\BOILERS-WORK\REPORT INSERTS\STANDARD GRADING SPECS

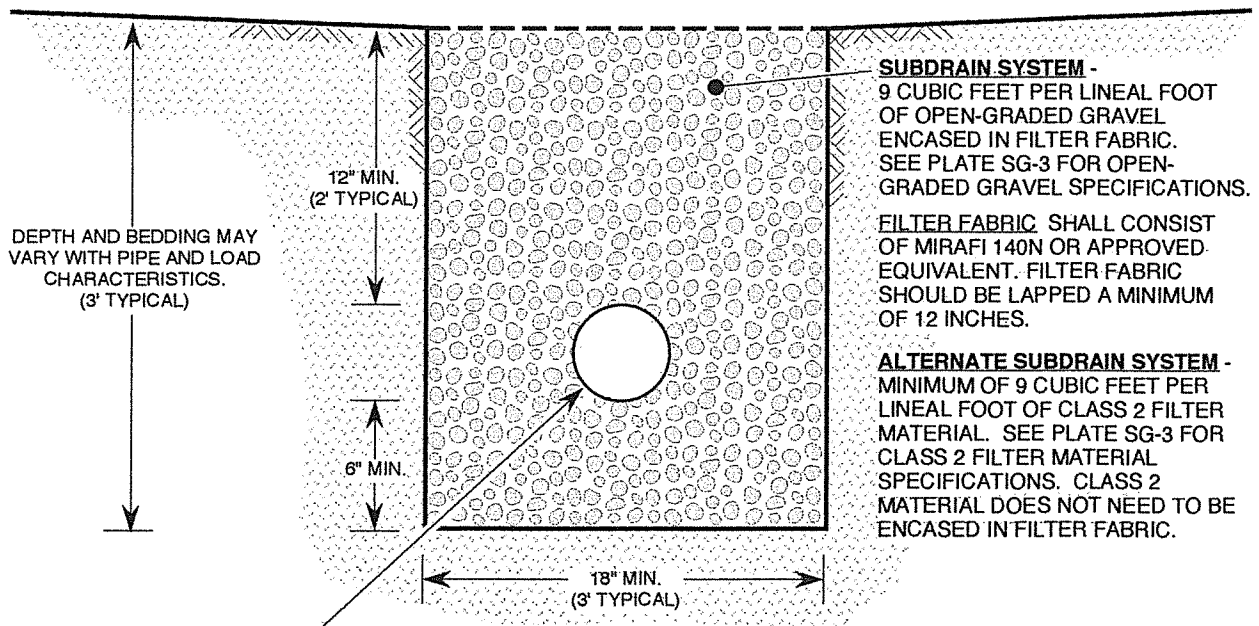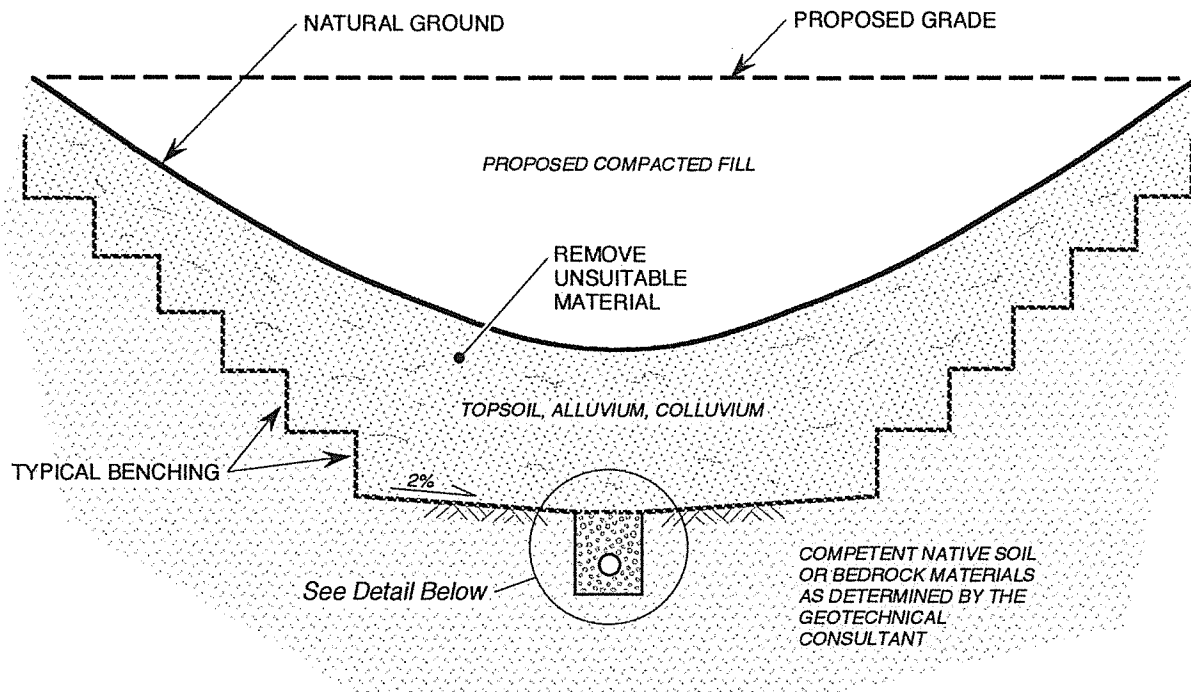

MINIMUM 6-INCH DIAMETER PVC SCHEDULE 40, OR ABS SDR-35 WITH A MINIMUM OF EIGHT 1/4-INCH DIAMETER PERFORATIONS PER LINEAL FOOT IN BOTTOM HALF OF PIPE. PIPE TO BE LAID WITH PERFORATIONS FACING DOWN.

NOTES:


1. FOR CONTINUOUS RUNS IN EXCESS OF 500 FEET USE 8-INCH DIAMETER PIPE.
2. FINAL 20 FEET OF PIPE AT OUTLET SHALL BE NON-PERFORATED AND BACKFILLED WITH FINE-GRAINED MATERIAL.


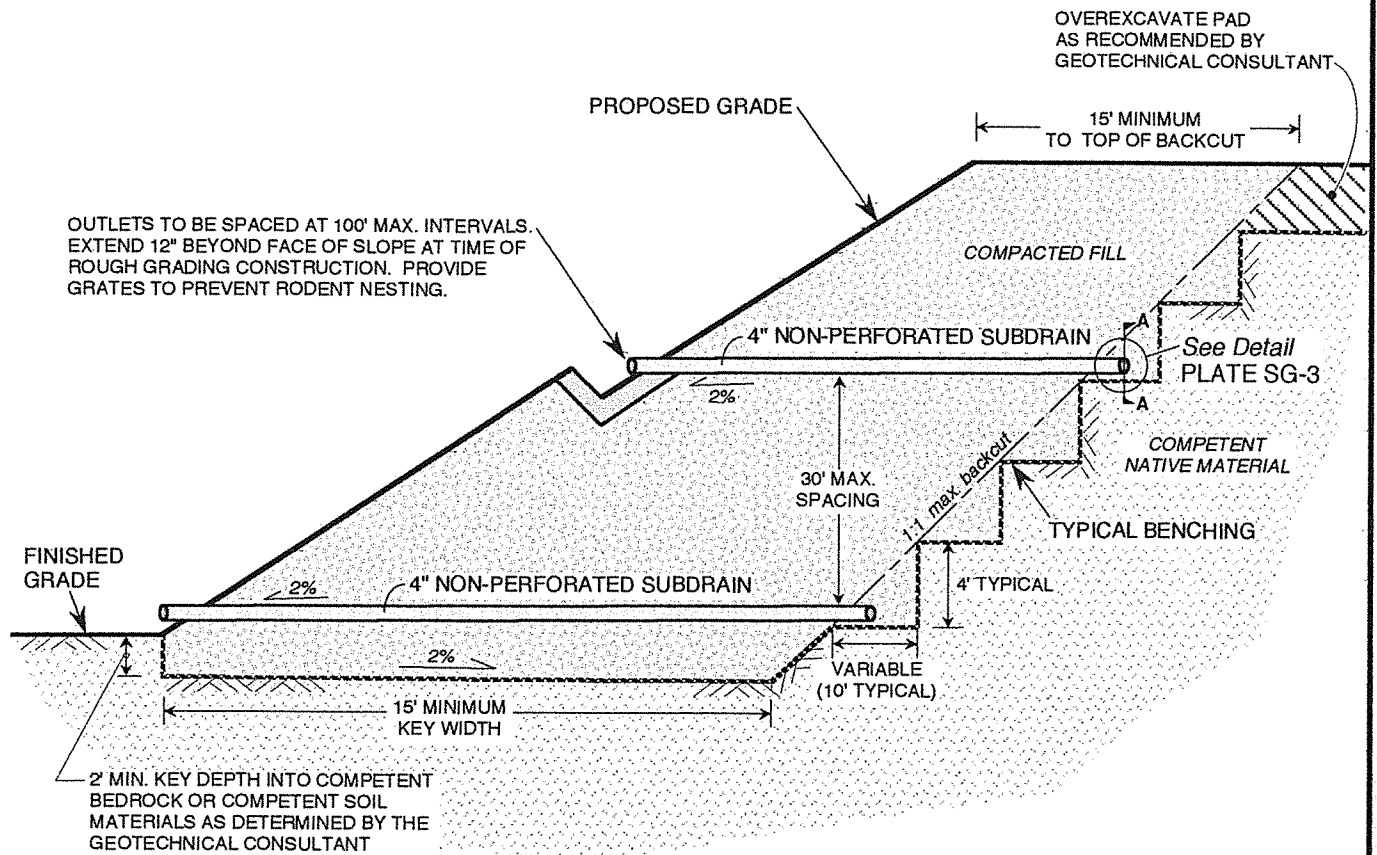


NOTES:

1. 30' MAXIMUM VERTICAL SPACING BETWEEN SUBDRAIN SYSTEMS.
2. 100' MAXIMUM HORIZONTAL DISTANCE BETWEEN NON-PERFORATED OUTLET PIPES. (See Below)
3. MINIMUM GRADIENT OF 2% FOR ALL PERFORATED AND NON-PERFORATED PIPE.

SECTION A-A (PERFORATED PIPE PROFILE)

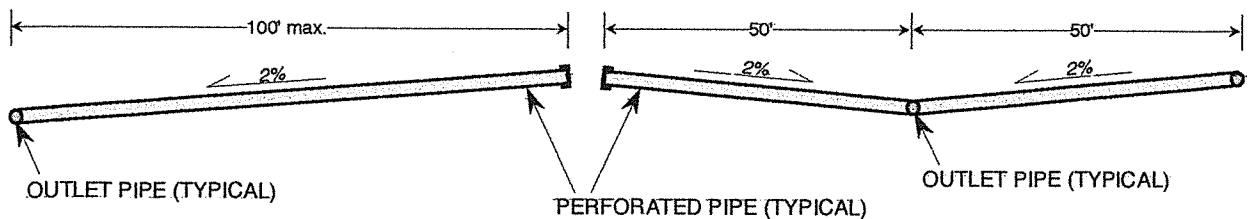

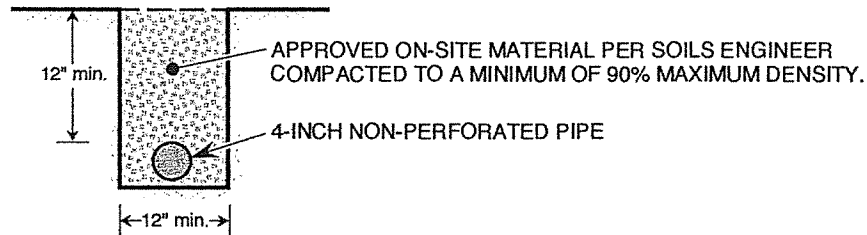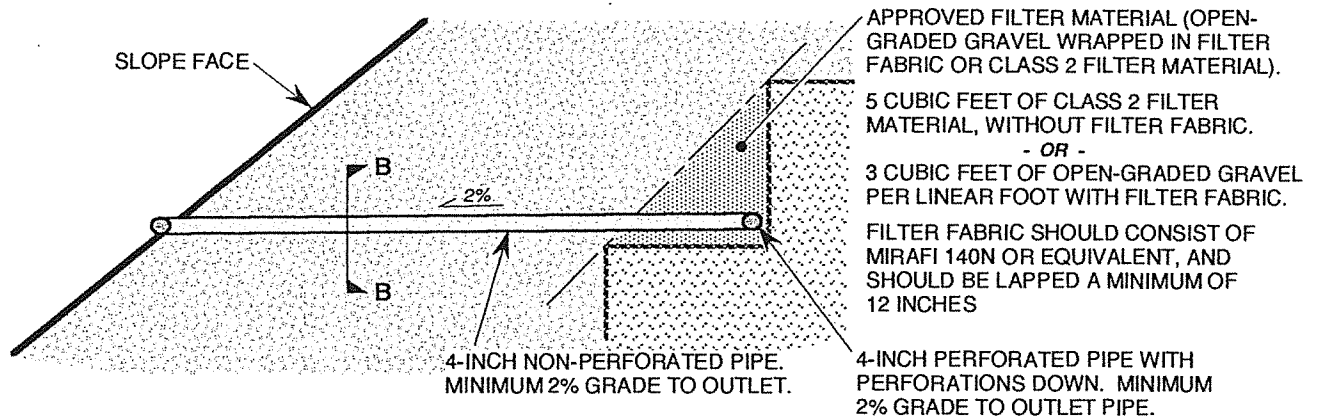

SECTION B-B (OUTLET PIPE)

PIPE SPECIFICATIONS:

1. 4-INCH MINIMUM DIAMETER, PVC SCHEDULE 40 OR ABS SDR-35.
2. FOR PERFORATED PIPE, MINIMUM 8 PERFORATIONS PER FOOT ON BOTTOM HALF OF PIPE.

FILTER MATERIAL/FABRIC SPECIFICATIONS:

OPEN-GRADED GRAVEL ENCASED IN FILTER FABRIC.
(MIRAFI 140N OR EQUIVALENT)

ALTERNATE:


CLASS 2 PERMEABLE FILTER MATERIAL PER CALTRANS
STANDARD SPECIFICATION 68-1.025.

OPEN-GRADED GRAVEL


<u>SIEVE SIZE</u>	<u>PERCENT PASSING</u>
1 1/2-INCH	88 - 100
1-INCH	5 - 40
3/4-INCH	0 - 17
3/8-INCH	0 - 7
No. 200	0 - 3

CLASS 2 FILTER MATERIAL


<u>SIEVE SIZE</u>	<u>PERCENT PASSING</u>
1-INCH	100
3/4-INCH	90 - 100
3/8-INCH	40 - 100
No. 4	25 - 40
No. 8	18 - 33
No. -30	5 - 15
No. -50	0 - 7
No. 200	0 - 3

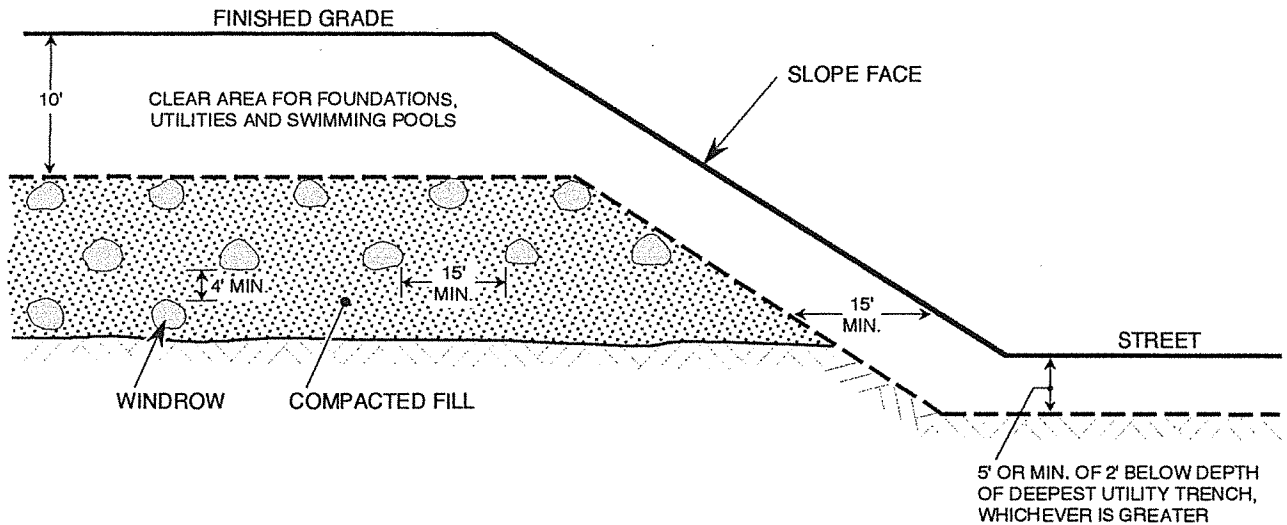


TYPICAL WINDROW DETAIL (END VIEW)

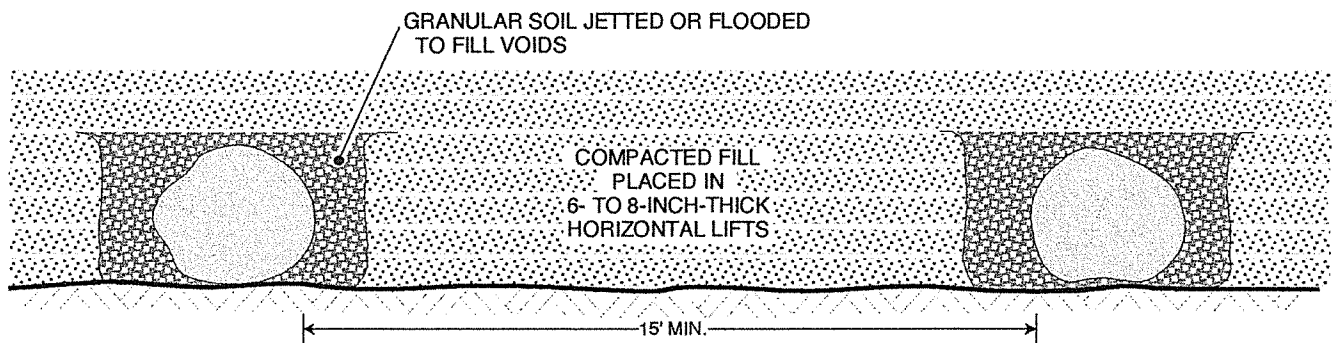

TYPICAL WINDROW DETAIL (PROFILE VIEW)

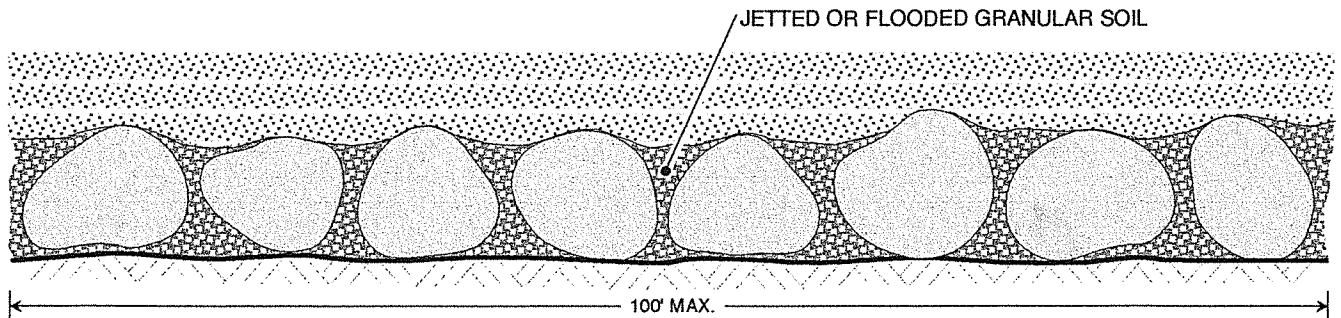

NOTE: OVERSIZE ROCK IS DEFINED AS CLASTS HAVING A MAXIMUM DIMENSION OF 12" OR LARGER

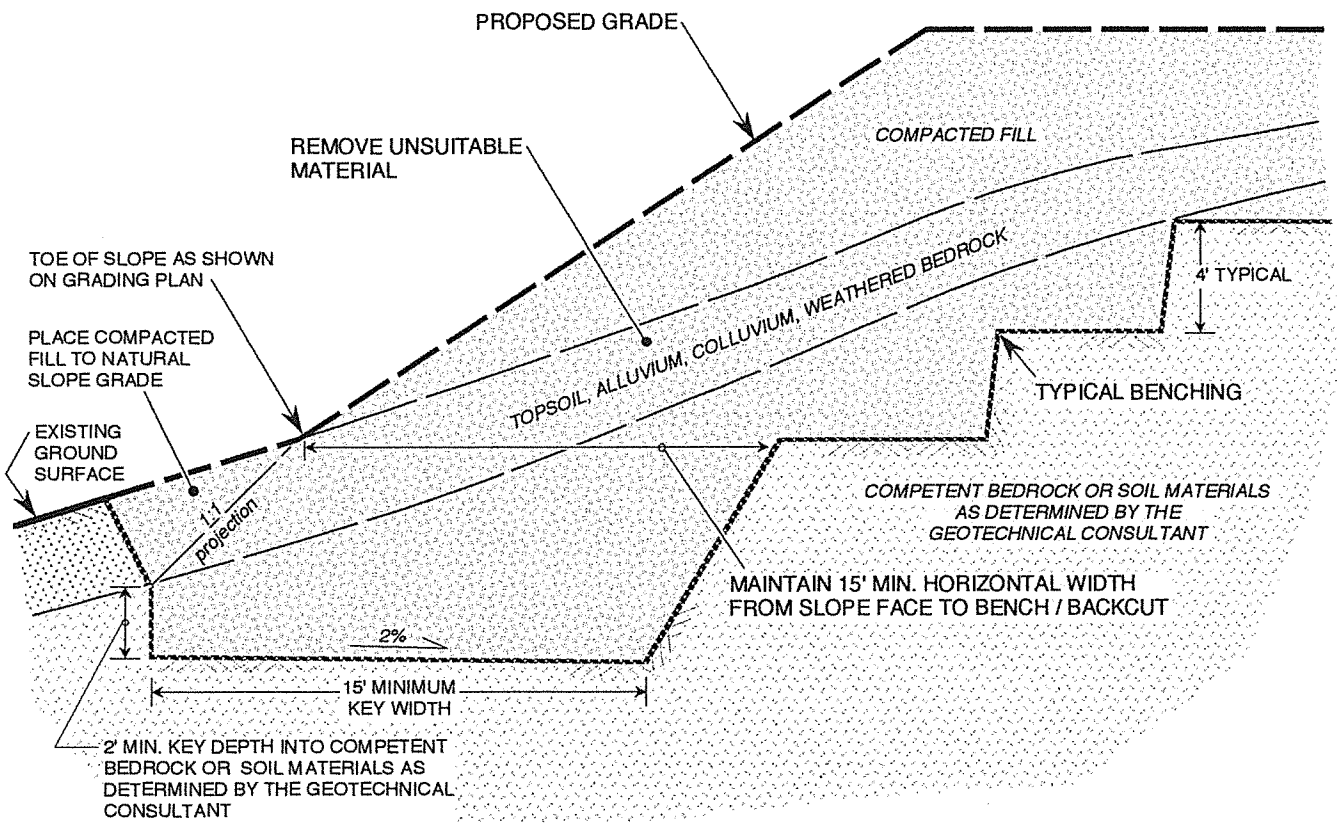


NOTES:

1. WHERE NATURAL SLOPE GRADIENT IS 5:1 OR LESS, BENCHING IS NOT NECESSARY; HOWEVER, FILL IS NOT TO BE PLACED ON COMPRESSIBLE OR UNSUITABLE MATERIAL.
2. SOILS ENGINEER TO DETERMINE IF SUBDRAIN IS REQUIRED.




CUT LOT

UNSUITABLE MATERIAL EXPOSED IN PORTION OF CUT PAD

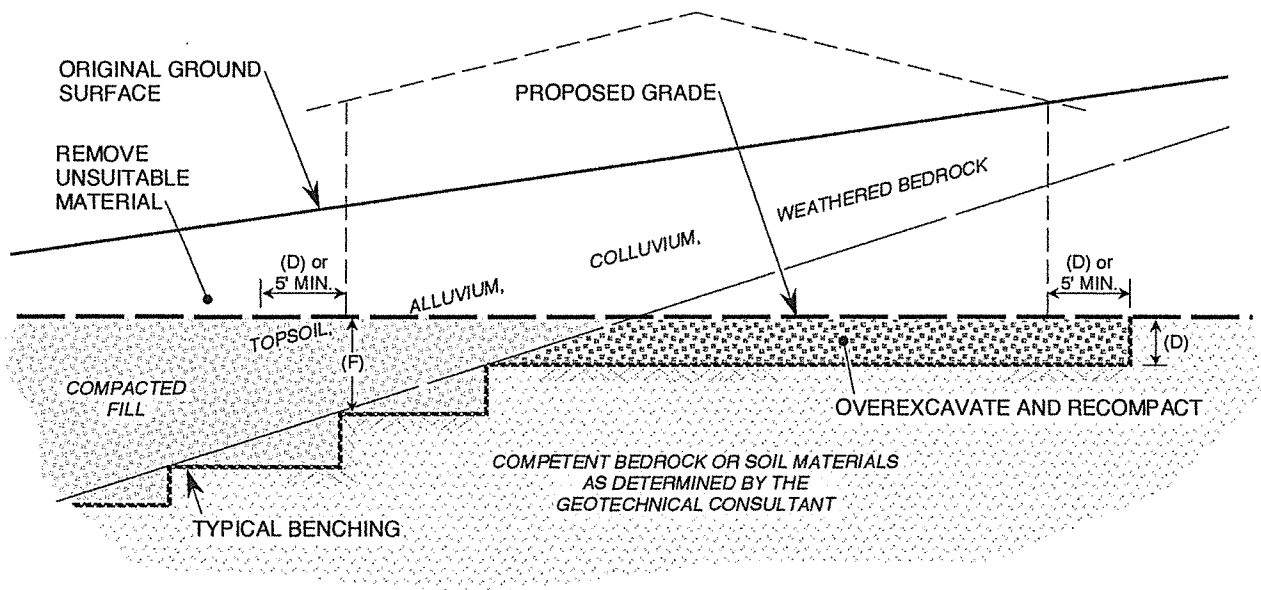

CUT-FILL TRANSITION LOT

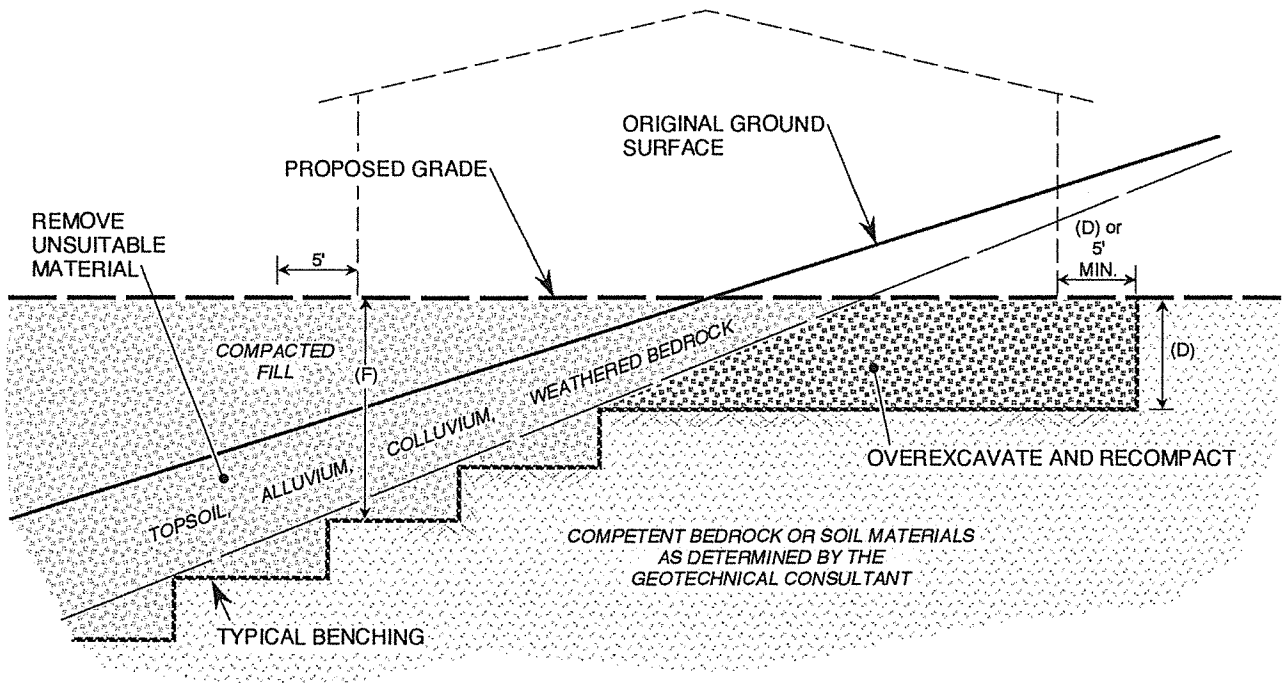

MAXIMUM FILL THICKNESS (F)

FOOTING DEPTH TO 3 FEET

3 TO 6 FEET


GREATER THAN 6 FEET

DEPTH OF OVEREXCAVATION (D)


EQUAL DEPTH

3 FEET

1/2 THE THICKNESS OF DEEPEST FILL PLACED WITHIN THE "FILL" PORTION (F) TO 15 FEET MAXIMUM

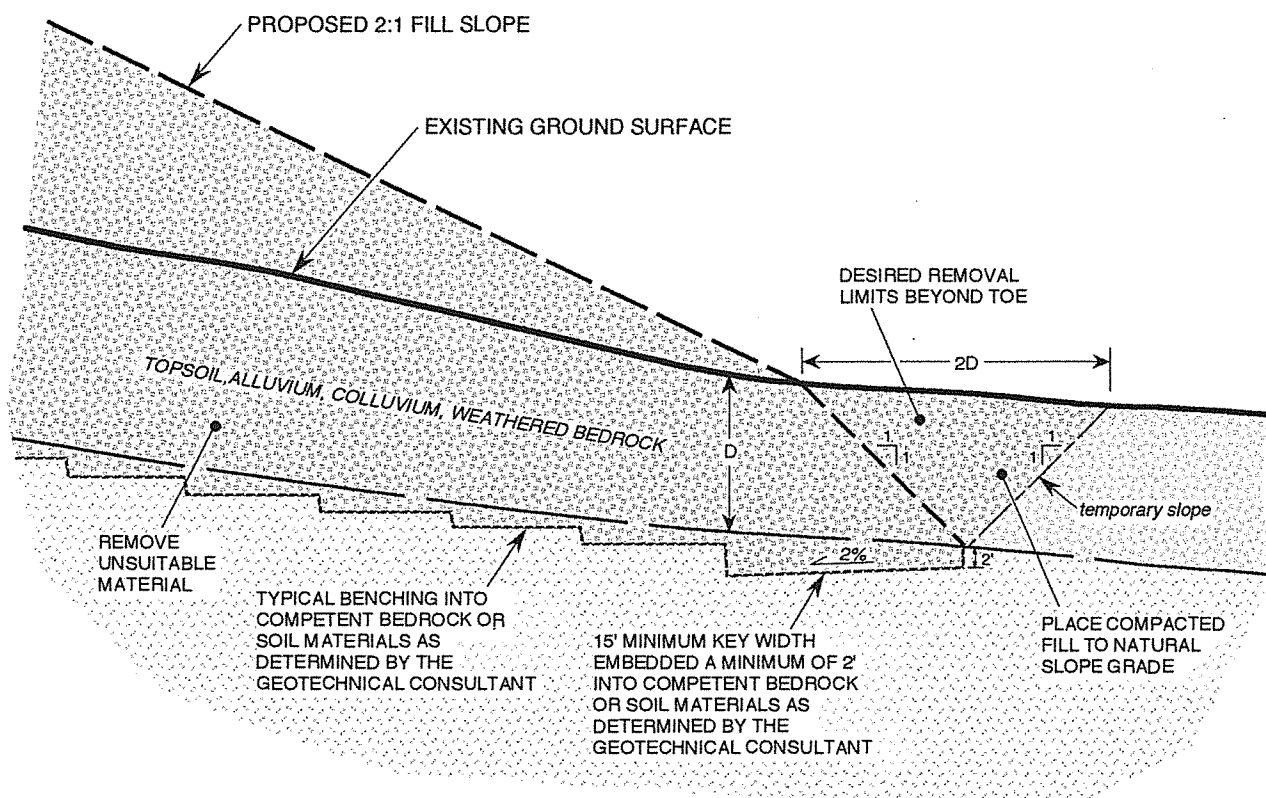

D = RECOMMENDED DEPTH OF REMOVAL
PER GEOTECHNICAL REPORT

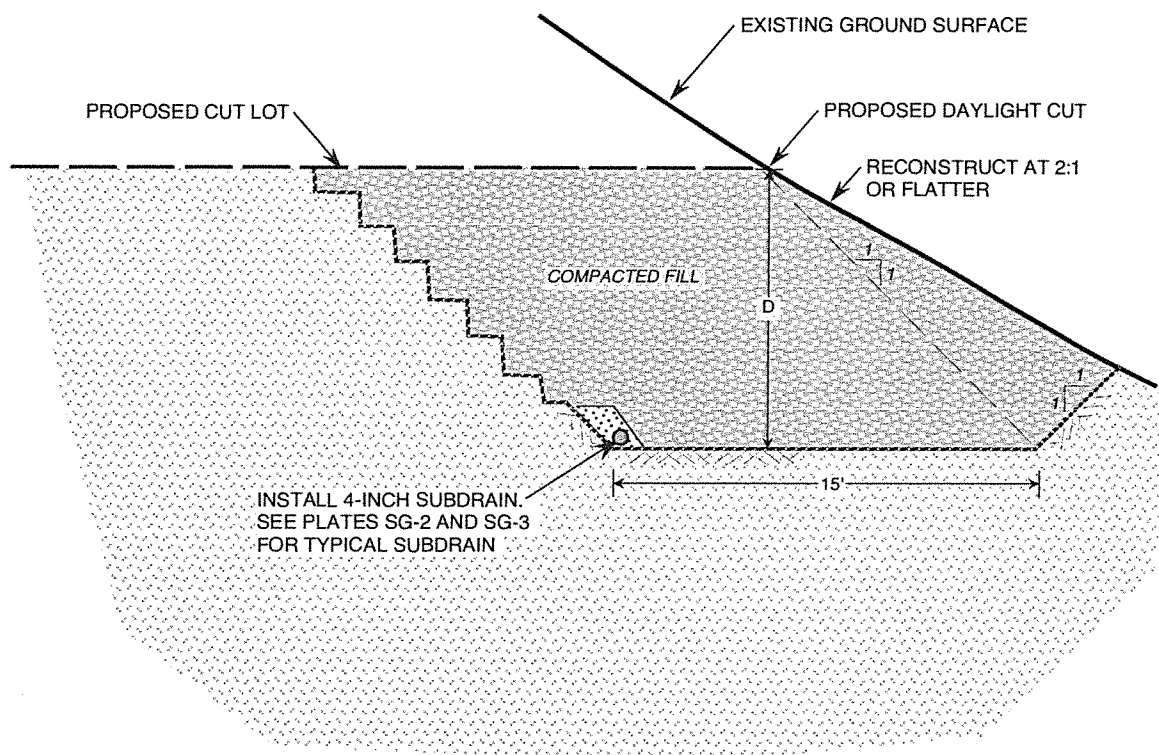

NOTE:

1. "D" SHALL BE 10 FEET MINIMUM OR AS DETERMINED BY SOILS ENGINEER.